



EV CHARGING SOLUTION

AC Charger / AC MAX

Features

- 22kW AC charger improves parking turnover
- RFID and ISO 15118 authentication for user management
- Low standby power consumption for energy-saving
- Remote management by built-in network connectivity
- OCPP compliance enables backend system integration
- IP55 and wallmount/stand installation provides high adaptability



Commercial
Building



Parking
Lot



Fleet



Residential
Area




DELTA

Compact and Powerful - Liven up Business and Home Charging

AC MAX is a smart AC charger supporting maximum 22kW output and global charging interface. With IP55 / IK09 and compact design, AC MAX provides high adaptability to outdoor and space-limited sites. By supporting ISO 15118, network connectivity and compatible with OCPP, AC MAX reserves the interoperability for system integration and can be an ideal solution for commercial and residential charging sites.




Feature Highlights



Max. Performance

- Up to 22kW output
- Low standby power
- Over-the-Air (OTA) configuration

Charging Standard



IEC 62196-2

Wiring
Bottom fed, Rear fed

Network Connectivity
Bluetooth, Ethernet, Cellular, Wifi



Max. Adaptability

- Global charging standard
- Compact design
- Flexible installation
- IP55 / IK09


User Authentication
RFID reader, ISO 15118



Max. Interoperability

- RFID, ISO 15118 identification
- Network connectivity
- OCPP backend compatibility
- Energy management

Application Scenario

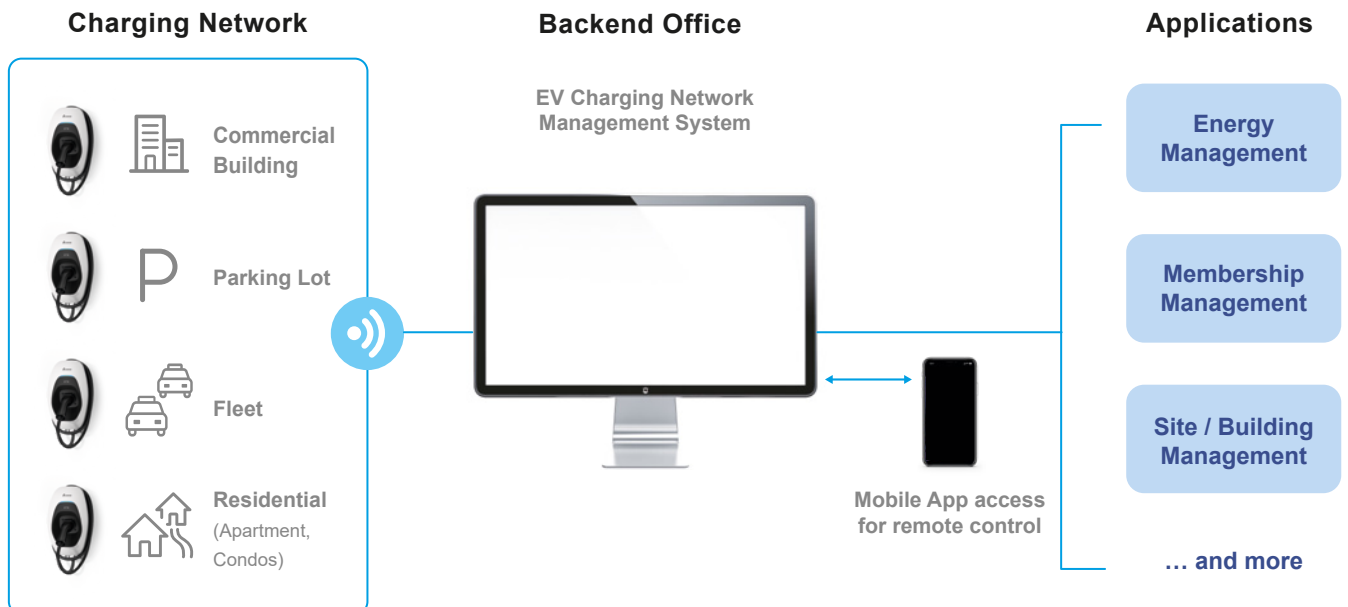

Specifications

| Part Number | EIAW-E | |
|--------------------------|--|---|
| Power | Single Phase | Three Phase |
| Input / Output Rating | 230 Vac, 32 A (maximum), 50-60 Hz | 400 Vac, 32 A (maximum), 50-60 Hz |
| Wire | L, N and PE, hardwired with terminal block | L1, L2, L3, N and PE, hardwired with terminal block |
| Standby Power * | < 2.6 W | |
| Max. Output Power | 7.4 kW | 11 kW, 22 kW |
| Charging Interface * | (1) IEC 62196-2 Type 2 tethered plug (2) IEC 62196-2 Type 2 Socket with shutter | |
| Protection | | |
| Internal RCD | AC 30 mA, DC 6 mA | |
| Electrical Protection | Over current, Under voltage, Over voltage, Over temperature, Surge protection, Short circuit, Ground fault | |
| Upstream Breaker | In accordance with local regulations | |
| Cold-Load Pickup | Randomized delay before charge resume after power failure | |
| Automatic Recovery | Automatically resume charging after a minor fault. No user intervention required | |
| Environment | | |
| Operating Temperature | -30 °C to +50 °C (-22 °F to +122 °F) | |
| Storage Temperature | -40 °C to +80 °C (-40 °F to +176 °F) | |
| Humidity | < 95% relative humidity, non-condensing | |
| Altitude | Up to 2,000m (6,500ft) | |
| Mechanical Design | | |
| Ingress Protection | IP55 | |
| Enclosure Protection | IK09 according to IEC 62262 | |
| Cooling | Natural cooling | |
| Charging Cable Length | 5m | |
| Dimension (W x H x D) | 218 x 371 x 167 mm (8.6 x 14.6 x 6.6 inch) excluding charging cable, mounting plate and cable holder | |
| Weight ** | 3.8 kg (8.3 lbs), without package | |
| Regulation | | |
| Certificate / Compliance | CE, UKCA, IEC 61851-1, IEC 62196-2 | |
| Installation | | |
| Accessory | Stand (optional) | |

| Version | Basic | Smart |
|--------------------------|--|---|
| User Interface & Control | | |
| Display | LED bar, 4 colors | LED bar, 4 colors |
| Charger Configuration | Maximum charging current selected by hardware DIP switch | |
| User Authentication | Key switch | ISO/IEC 14443 RFID card reader ISO 15118 |
| Communication | | |
| Network Interface | Bluetooth | Bluetooth, Ethernet, Wifi, Cellular |
| Charging Protocol | - | OCP1.6J, upgradable to OCPP2.0 |
| Metering | | |
| Meter | - | IC* |

* Product outlook depends on model configuration. Specifications are subject to change without notice.

** Depends on model configuration



More information

Delta Electronics (Australia) Pty Ltd

18/39 Herbert Street, St Leonards NSW 2065
20-21 /45 Normanby Rd, Notting Hill VIC 3168
TEL : +61 3 8546 3018
Email : evcs.service.au@deltaww.com

www.deltaelectronics.com.au