
800HCUR55

Allen-Bradley 800H Potentiometer 30.5mm Finger Safe 5 MOHM Resistive Element



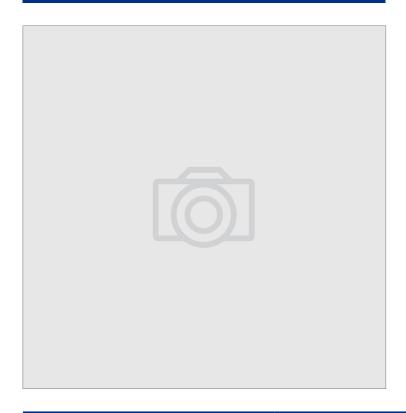

Component type	Potentiometer for command devices
Range	800T/H Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

71	0 Ohm
Machanical life (comics avales) 25000 0	onnection
Mechanical life (service cycles) 25000.0	cycles
Vibration acceleration (Max) 10.0 m/s	52
MECHANICAL Vibration frequency, operational (Max) 2000.0 H	-lz
Shock acceleration (Max) 100.0 g	
Shock duration (Max) 11.0 ms	
DIMENSIONS Hole diameter 30.5 mm	1
ENVIRONMENT Operating temperature -40 - 55	°C