
800TCU19

Allen-Bradley 800T Potentiometer 2500 Ohms Resistive Element FS Terminal Guard for 30.5mm PB



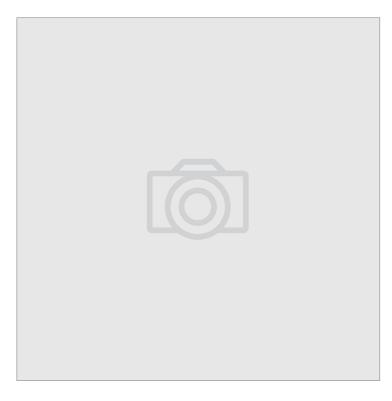


Component type	Potentiometer for command devices	
Range	800T/H Pushbutton	
Model	N/A	
Product status	Existing	

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

ELECTRICAL	Resistance	2500.0 Ohm
	Type of electric connection	Screw connection
MECHANICAL	Mechanical life (service cycles)	25000.0 cycles
	Vibration acceleration (Max)	10.0 m/s ²
	Vibration frequency, operational (Max)	2000.0 Hz
	Shock acceleration (Max)	100.0 g
	Shock duration (Max)	11.0 ms
DIMENSIONS	Hole diameter	30.5 mm
ENVIRONMENT	Operating temperature	-40 - 55 °C

DIMENSIONAL DIAGRAM

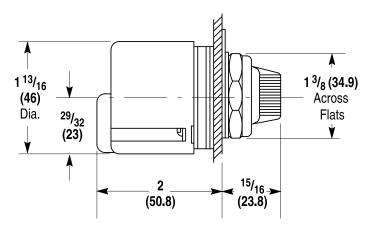

1 25/₃₂
(45.2)
57/₆₄
(22.6)

1 153/₆₄
(46.4)

1 11/₁₆
(17.5)

1 31/₆₄
(37.7)
Across
Corners

Type J Potentiometer Unit Shipping Wt. 4 oz (0.11 kg)