

150F43NBDB


Allen-Bradley SMC Flex Soft Starter 480V 43A ND3W 100 to 240VAC Control Pump Control



Allen-Bradley

by ROCKWELL AUTOMATION

SOFT STARTERS

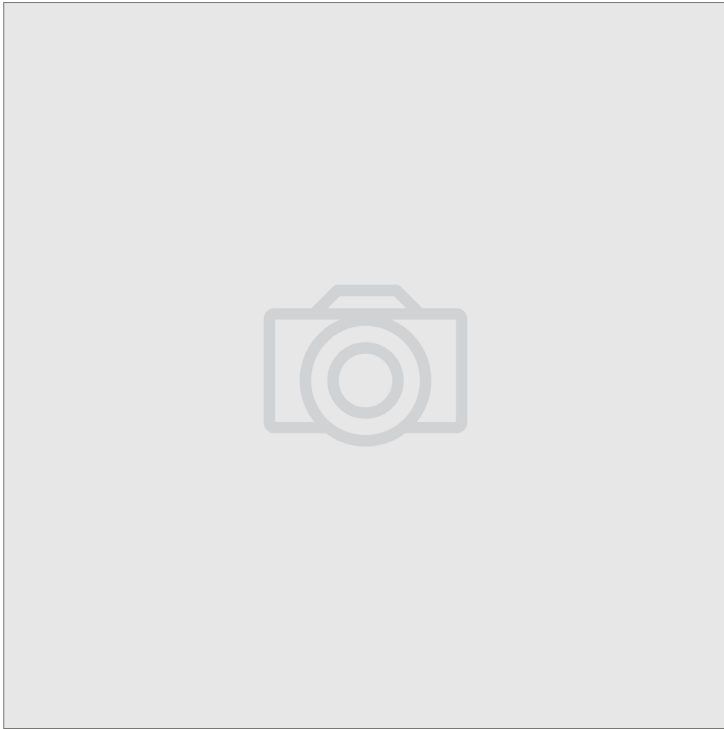

Component type	Soft starter
Range	SMC Flex
Model	N/A
Product status	Existing

The Allen-Bradley SMC Flex Soft Starters feature integral bypass and flexible communications providing advanced performance, diagnostics, and protection. Available with a current range from 5A to 1250A, modular in design for installation and commissioning, with built-in LCD displays and communication modules ensuring connection to multiple networks.

ELECTRICAL

Rated power three-phase motor, inline, at 400 V	22.0 kW
Rated power three-phase motor, inside delta, at 400 V	37.0 kW
Rated operating voltage Ue	200 - 480 V
Integrated motor overload protection	Yes
Release class	Adjustable
Internal bypass	Yes
Voltage type for actuating	AC
Rated control supply voltage Us at AC 50HZ	100 - 240 V
Rated control supply voltage Us at AC 60HZ	100 - 240 V

CONSTRUCTION

Function	Single direction
With display	Yes
Degree of protection (IP)	IP00

DIMENSIONS

Height	321.0 mm
Width	150.0 mm
Depth	203.0 mm
Weight	5.7 kg

ENVIRONMENT

Rated surrounding temperature without derating	40.0 °C
--	---------