


# 556650

nVent ERIFLEX Earth Braids 120A 16mm<sup>2</sup> Length 250mm Hole Diameter 8.5mm

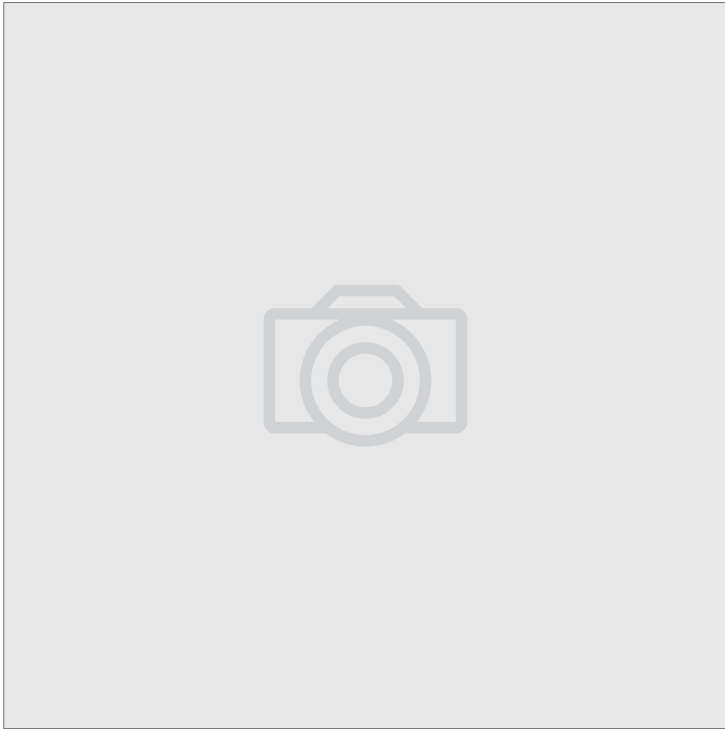

<b>Component type</b>	Earthing strip preassembled
<b>Range</b>	Earth Braid
<b>Model</b>	N/A
<b>Product status</b>	Existing

The nVent ERIFLEX Earth Braids provide a reliable solution for ensuring safe and efficient electrical grounding in industrial and commercial settings. Made of high-quality materials, such as copper, which provide superior strength, durability, and conductivity, they range from 6-100mm<sup>2</sup> in size and are available in pre-cut lengths from 100-500mm or in rolls that can be cut to size.

<b>ELECTRICAL</b>	Rated current	120.0 A
	Conductor material	Copper
<b>CONSTRUCTION</b>	Braided	Yes
	Shape of conductor	Flat
	Conductor surface	Tinned
	Conductor category	Class 5 = flexible
	Cable width approx.	15.0 mm
	Insulated	No
	With connecting lugs	Yes
	Connection lugs drilled	Yes
	With cable lugs	Yes
	<b>DIMENSIONS</b>	Nominal cross section conductor
Hole diameter connection		8.5 mm
Length		250.0 mm
Width		15.0 mm
Thickness		1.5 mm
Weight		0.04 kg
<b>ENVIRONMENT</b>	Cable height approx.	1.5 mm
	Max. operating temperature	105.0 °C