800HCBR2A

Allen-Bradley 800H Pushbutton 30.5mm Complete PL Guards on Contacts EXT HD 1NO 1NC Black



Component type

oomponent type	r don batton, complete
Range	800T/H Pushbutton
Model	N/A
Product status	Existing




The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

Push button complete

ELECTRICAL	Number of contacts as normally open contact	1.0
	Number of contacts as normally closed contact	1.0
	Type of electric connection	Screw connection
CONSTRUCTION	Colour button	Black
	Type of button	Extended
	With front ring	Yes
	Material front ring	Plastic
	Degree of protection (IP)	IP65/IP66
MECHANICAL	Switching function latching	No
	Shock acceleration (Max)	100.0 g
	Vibration acceleration (Max)	10.0 m/s ²
	Vibration frequency, operational (Max)	2000.0 Hz
PHOTOMETRIC	Suitable for illumination	No
DIMENSIONS	Hole diameter	30.5 mm
	Operator diameter	34.9 mm
	· · · · · · · · · · · · · · · · · · ·	



DIMENSIONAL DIAGRAM

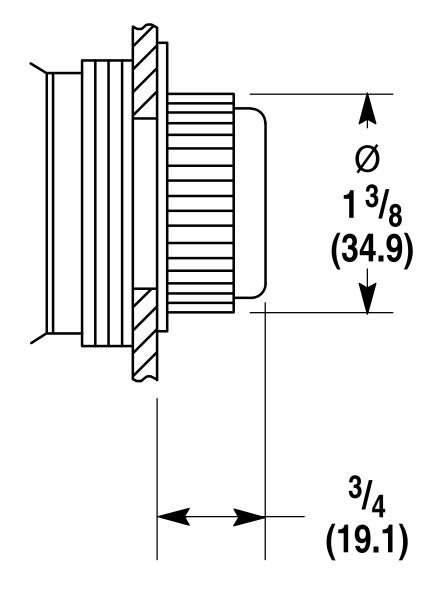

Booted Flush and Extended Head Momentary Contact Push Button Shipping Weight. 5-1/2 oz (0.16 kg)