## **800TCA1A**

Allen-Bradley 800T PB 30.5mm FS Terminal Guard Flush Head Mom. Non Illuminated 1 N.O. 1 N.C. Green






Component type	Push button, complete
Range	800T/H Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

	Number of contacts on normally onen contact	1.0
ELECTRICAL	Number of contacts as normally open contact	1.0
	Number of contacts as normally closed contact	1.0
	Type of electric connection	Screw connection
CONSTRUCTION	Colour button	Green
	Type of button	Flush
	With front ring	Yes
	Material front ring	Metal
	Degree of protection (IP)	IP65/IP66
MECHANICAL	Switching function latching	No
	Shock acceleration (Max)	100.0 g
	Vibration acceleration (Max)	10.0 m/s <sup>2</sup>
	Vibration frequency, operational (Max)	2000.0 Hz
PHOTOMETRIC	Suitable for illumination	No
DIMENSIONS	Hole diameter	30.5 mm
	Operator diameter	34.9 mm



## DIMENSIONAL DIAGRAM

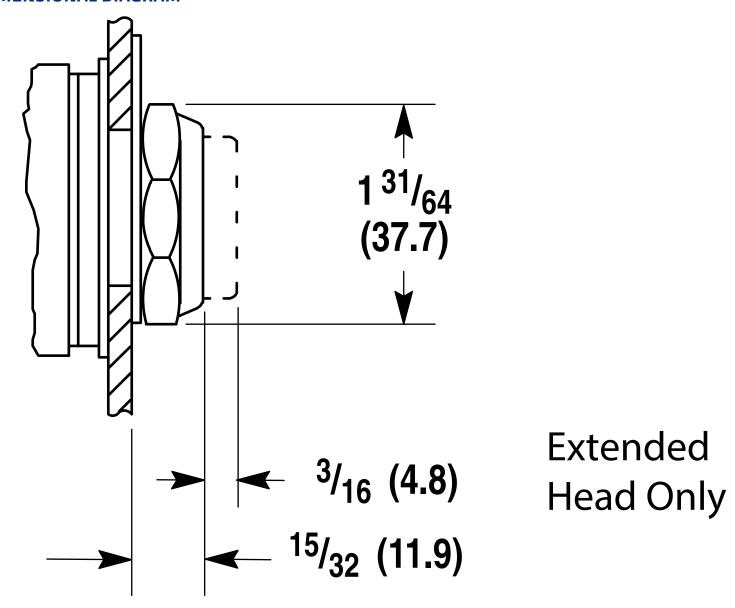

## Flush and Extended Head Push Button Shipping Wt. 5-1/2 oz (0.15 kg)