


# ANX2ABDHRIO

ProSoft ANX Gateway Ethernet/IP to Allen Bradley Remote I/O or Dh+

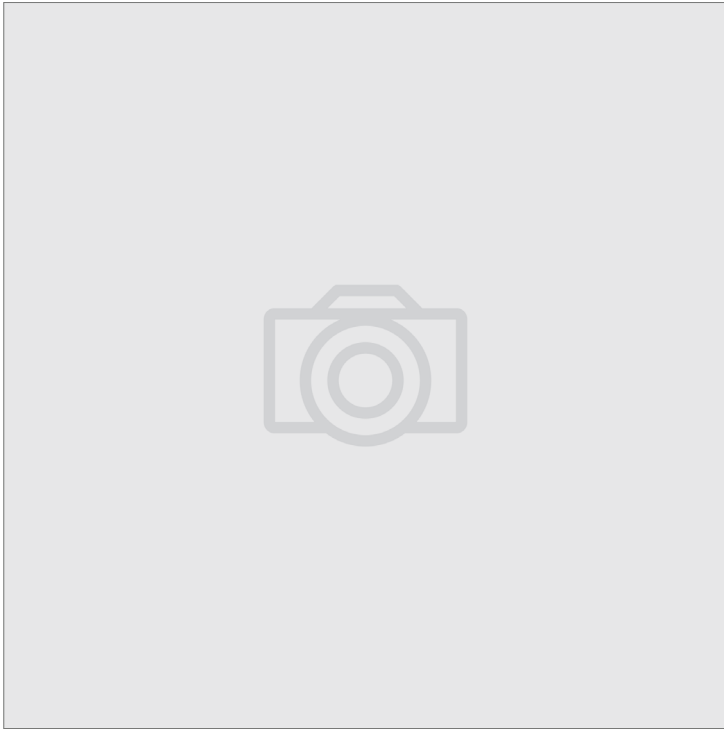

<b>Component type</b>	Fieldbus, decentr. periphery - communication module
<b>Range</b>	Stand-alone
<b>Model</b>	N/A
<b>Product status</b>	Phased Out

The ProSoft Technology stand-alone DIN rail-mounted industrial gateways provide an easy to use solution to read or write data from devices using different protocols. All Prosoft gateways are equipped with ProSoft Discovery Service (PDS) software which automatically detects the default IP address without being on the same subnet, saving setup time and enabling faster configurations of our networks

<b>ELECTRICAL</b>	Supply voltage DC	12 - 24 V
	Voltage type of supply voltage	DC
<b>COMMUNICATION</b>	Supporting protocol for EtherNet/IP	Yes
<b>DIMENSIONS</b>	Width	126.0 mm
	Height	34.0 mm
	Depth	107.0 mm