
CAQ71611240VAC

S+S CAQ7 Contactor 3Pole 15kVAr 240VAC Coil 1NO 1NC Contact Auxiliary

CONTACTORS

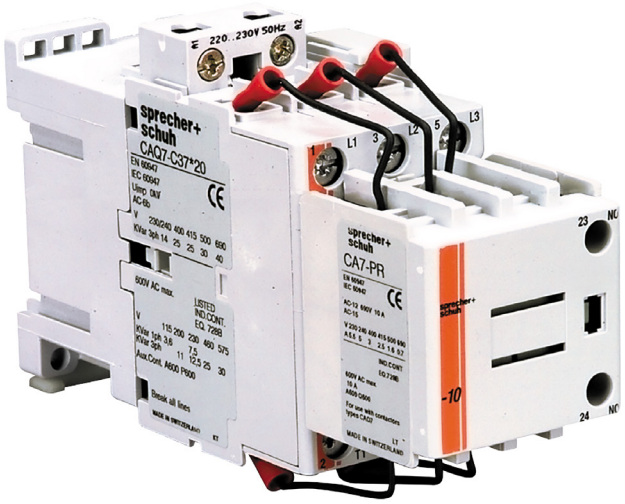

Component type	Power contactor, AC switching
Range	CAQ7
Model	N/A
Product status	Existing

The Sprecher + Schuh CAQ7 Capacitor Switching Contactors are designed to switch banks of capacitors. Built to be compact with front-mounted resistor elements, limiting severe high inrush currents and reducing stress to the contactors and the capacitors.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation power at AC-3, 400 V	15.5 kW
	Rated operation current Ie at AC-1, 400 V	32 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	AC
	Rated control supply voltage Us at AC 50HZ	204264 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	1
	Rated control supply voltage Us at AC 60HZ	235304 V
	Type of electrical connection of main circuit	Screw connection
CONSTRUCTION	IP rating	IP20
	Mounting method	DIN-rail/screw
DIMENSIONS	Height	105 mm
	Width	45 mm
	Depth	120 mm
	Weight	0.46 kg


Published on 30 May 2026


CAQ71611240VAC

S+S CAQ7 Contactor 3Pole 15kVAr 240VAC Coil 1NO 1NC Contact Auxiliary

CONTACTORS

DIMENSIONAL DIAGRAM

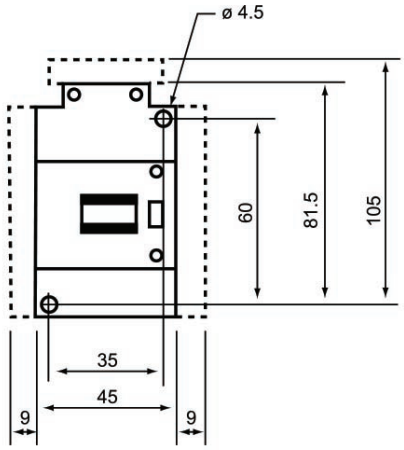

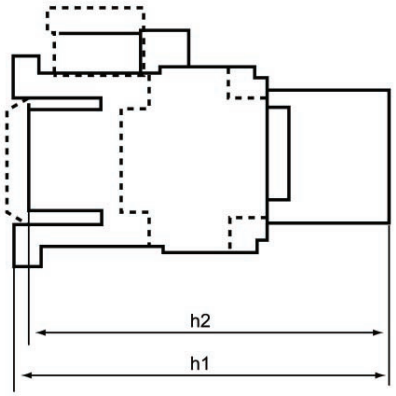

- Dimensions in mm
- Dimensions not intended for manufacturing purposes

	AC operated contactor		DC operated contactor	
Contactor	**h1**	**h2**	**h1**	**h2**
CAQ 7-16	120	115	146	141
CAQ 7-37	137	132	181	176

Published on 30 May 2026