


CAQ71620240VAC

S+S CAQ7 Contactor 3Pole 15kVAr 240VAC Coil 2NO Contact Auxiliary

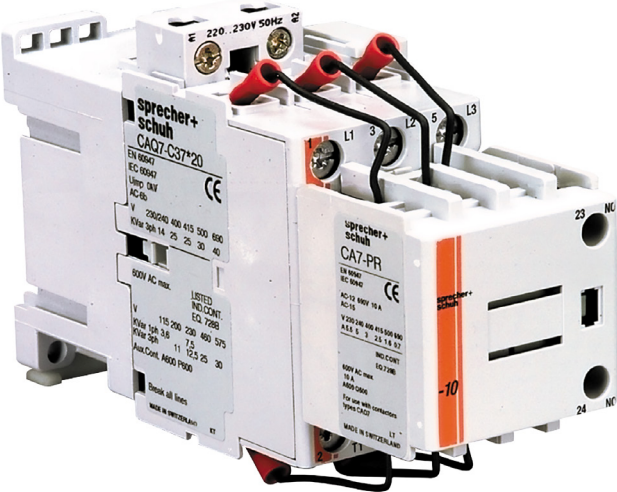

Component type	Power contactor, AC switching
Range	CAQ7
Model	N/A
Product status	Existing

The Sprecher + Schuh CAQ7 Capacitor Switching Contactors are designed to switch banks of capacitors. Built to be compact with front-mounted resistor elements, limiting severe high inrush currents and reducing stress to the contactors and the capacitors.

ELECTRICAL

Number of normally open contacts as main contact	3
Number of normally closed contacts as main contact	0
Rated operation power at AC-3, 400 V	15.5 kW
Max. rated operation voltage Ue AC	690 V
Voltage type for actuating	AC
Rated control supply voltage Us at AC 50HZ	204264 V
Number of auxiliary contacts as normally open contact	2
Number of auxiliary contacts as normally closed contact	0
Rated control supply voltage Us at AC 60HZ	235304 V
Type of electrical connection of main circuit	Screw connection

CONSTRUCTION

IP rating	IP20
Mounting method	DIN-rail/screw


DIMENSIONS

Height	105 mm
Width	45 mm
Depth	120 mm
Weight	0.48 kg

CAQ71620240VAC

S+S CAQ7 Contactor 3Pole 15kVAr 240VAC Coil 2NO Contact Auxiliary

DIMENSIONAL DIAGRAM

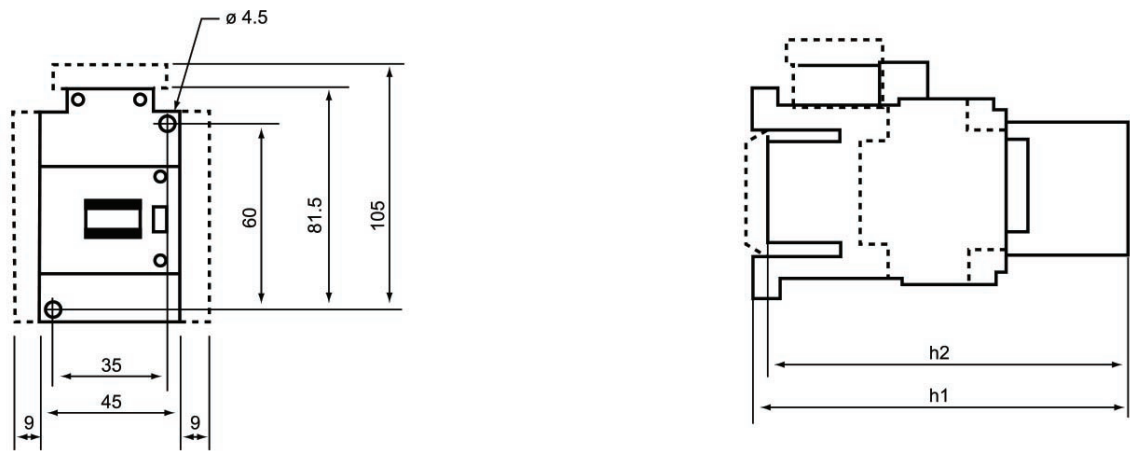

- Dimensions in mm
- Dimensions not intended for manufacturing purposes

Contactor	AC operated contactor		DC operated contactor	
	h1	h2	h1	h2
CAQ 7-16	120	115	146	141
CAQ 7-37	137	132	181	176