CAS71223C110VAC

S+S CAS7 Safety Contactor 5.5kW 3Pole 110VAC Coil 2NO 3NC Contact Auxiliary

SAFETY CONTACTORS

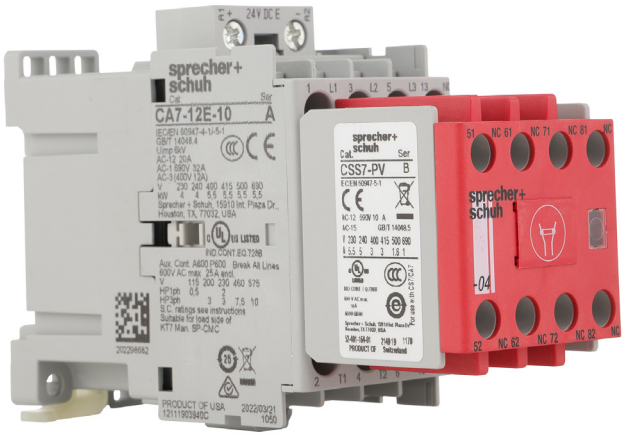

Component type	Power contactor, AC switching
Range	CAS7
Model	N/A
Product status	Existing

The Sprecher + Schuh CAS7 Safety Contactors provide reliable and efficient performance in industrial environments where safety is a priority. The high-quality materials and advanced technologies ensure a long lifespan and reduced maintenance costs. Designed with high switching capacity and low power consumption making they are ideal for demanding environments.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-3, 400 V	12 A
	Rated operation power at AC-3, 400 V	5.5 kW
	Rated operation current Ie at AC-1, 400 V	32 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	AC
	Control supply voltage Us at AC 50HZ	110 V
	Number of auxiliary contacts as normally open contact	2
	Number of auxiliary contacts as normally closed contact	3
	Rated operation current Ie at AC-3, 690 V	7 A
	Rated operation power at AC-3, 690 V	5.5 kW
	Rated operation power at AC-4, 400 V	3 kW
	Control supply voltage Us at AC 60HZ	120 V
	Power consumption, AC coil pickup	75 VA
	Power consumption, AC coil hold-in	9.5 VA
	Type of electrical connection of main circuit	Screw connection
	Rated operation current Ie at AC-4, 400 V	6.6 A
CONSTRUCTION	IP rating	IP20
	Mounting method	DIN-rail/screw
DIMENSIONS	Height	81 mm
	Width	45 mm
	Depth	119.5 mm
	Weight	0.45 kg

Published on 18 June 2026

CAS71223C110VAC

S+S CAS7 Safety Contactor 5.5kW 3Pole 110VAC Coil 2NO 3NC Contact Auxiliary

SAFETY CONTACTORS

DIMENSIONAL DIAGRAM

Dimensions are in millimeters. Dimensions are not intended for manufacturing purposes.

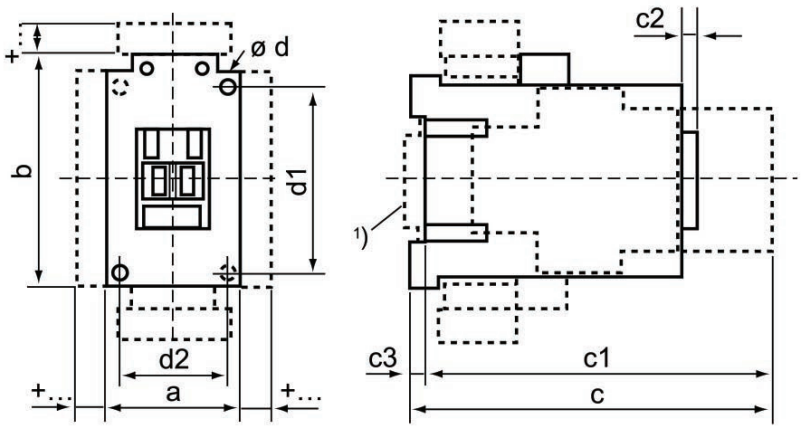

Type	a	b	c	c1	c2	c3	ød	d1	d2
CAS 7 - 9...CAS 7 - 23	45	81	119.5	114.5	6	4.5	2 x 4.5	60	35 [1])
CAS 7 - 30...CAS 7 - 37	45	81	136.5	131.6	6.5	4.5	2 x 4.5	60	35 [1])
CAS 7 - 43	54	81	139.5	134.6	6.5	5	2 x 4.5	60	45 [1])
CAS 7 - 60...CAS 7 - 85	72	122	156	150.5	8.5	5.5	4 x 5.4	100	55 [1])

Accessories

Contactor with ...		mm
Auxiliary contact block, side-mounted	1 or 2 pole	a + 9
Solid-state timing module (100-ETA)	on coil connection side	b + 24
Solid-state timing module (100-ETB / 100-ETY)	on coil connection side	b + 24
Mechanical interlock	side-mounted	a + 9
Interface	on coil connection side	b + 9
Suppressor module	on coil connection side	b + 3
Marking with:	sheets of labels	+ 0
	marking sheets with cover	+ 0
	label holder for V4/V5	+ 5.5
	label holder for V7	+ 5.5

Published on 18 June 2026