# CAS712E14C24VDC

**S+S CAS7 Safety Contactor 5.5kW 3Pole 24VDC Coil 1NO 4NC Contact Auxiliary**

SAFETY CONTACTORS




| | |
|---|---|
| **Component type** | Power contactor, AC switching |
| **Range** | CAS7 |
| **Model** | N/A |
| **Product status** | Existing |

The Sprecher + Schuh CAS7 Safety Contactors provide reliable and efficient performance in industrial environments where safety is a priority. The high-quality materials and advanced technologies ensure a long lifespan and reduced maintenance costs. Designed with high switching capacity and low power consumption making they are ideal for demanding environments.

| | | |
|---|---|---|
| **ELECTRICAL** | Number of normally open contacts as main contact | 3 |
| | Number of normally closed contacts as main contact | 0 |
| | Rated operation current Ie at AC-3, 400 V | 12 A |
| | Rated operation power at AC-3, 400 V | 5.5 kW |
| | Rated operation current Ie at AC-1, 400 V | 32 A |
| | Max. rated operation voltage Ue AC | 690 V |
| | Voltage type for actuating | DC |
| | Control supply voltage Us at DC | 24 V |
| | Number of auxiliary contacts as normally open contact | 1 |
| | Number of auxiliary contacts as normally closed contact | 4 |
| | Rated operation current Ie at AC-3, 690 V | 7 A |
| | Rated operation power at AC-3, 690 V | 5.5 kW |
| | Rated operation power at AC-4, 400 V | 3 kW |
| | Power consumption, DC coil pickup | 10 W |
| | Power consumption, DC coil hold-in | 1.7 W |
| | Type of electrical connection of main circuit | Screw connection |
| | Rated operation current Ie at AC-4, 400 V | 6.6 A |
| **CONSTRUCTION** | IP rating | IP20 |
| | Mounting method | DIN-rail/screw |
| **DIMENSIONS** | Height | 81 mm |
| | Width | 45 mm |
| | Depth | 119.5 mm |
| | Weight | 0.46 kg |

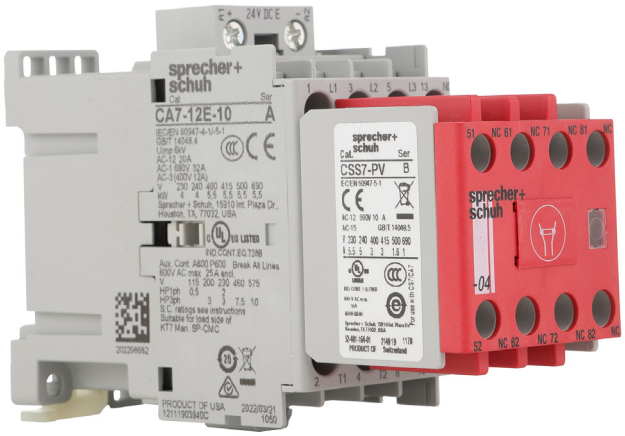

Published on 18 June 2026

# CAS712E14C24VDC

**S+S CAS7 Safety Contactor 5.5kW 3Pole 24VDC Coil 1NO 4NC Contact Auxiliary**

SAFETY CONTACTORS

## DIMENSIONAL DIAGRAM

Dimensions are in millimeters. Dimensions are not intended for manufacturing purposes.




| Cat No. | a | b | c | c1 | ød | d1 | d2 |
|---|---|---|---|---|---|---|---|
| CAS 7-9D...CAS 7-16D | 45 | 81 | 145.5 | 140.5 | 2 pcs 4.5 | 60 | 35 |
| CAS 7-23D | 45 | 81 | 162.5 | 158 | 2 pcs 4.5 | 60 | 35 |
| CAS 7-30D...CAS 7-37D | 45 | 81 | 180.5 | 175.5 | 2 pcs 4.5 | 60 | 35 |
| CAS 7-43D | 54 | 81 | 183.5 | 179 | 2 pcs 4.5 | 60 | 45 |
| CAS 7-60D...CAS 7-85D | 72 | 122 | 156 | 150.5 | 4 pcs 5.4 | 100 | 55 |

## Accessories

| Contactor with ... | | mm |
|---|---|---|
| Auxiliary contact block, side-mounted | 1 or 2 pole | a + 9 |
| Solid-state timing module (100-ETA) | on coil connection side | b + 24 |
| Solid-state timing module (100-ETB / 100-ETY) | on coil connection side | – |
| Mechanical interlock | side-mounted | a + 9 |
| Interface | on coil connection side | – |
| Suppressor module | on coil connection side | b + 3 |
| Marking with: | sheets of labels | + 0 |
| | marking sheets with cover | + 0 |
| | label holder for V4/V5 | + 5.5 |
| | label holder for V7 | + 5.5 |

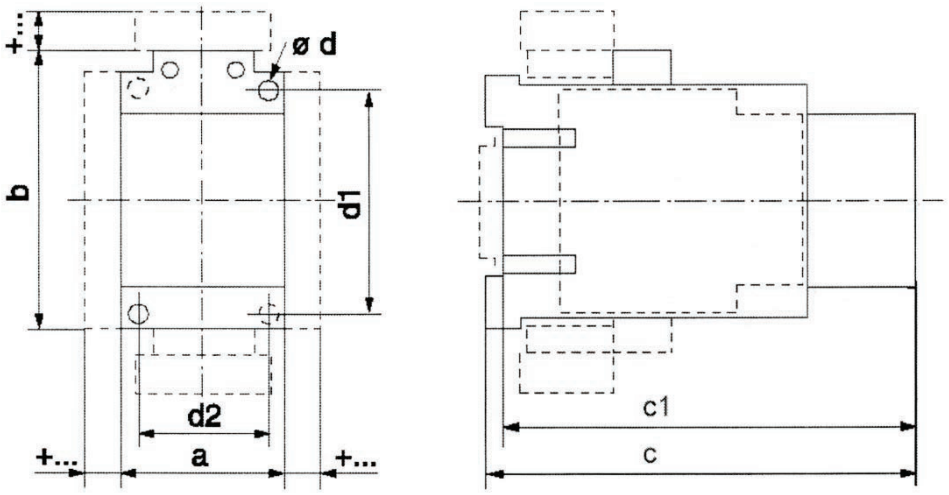

Published on 18 June 2026