


# CPTBNV110

Cirprotec BNV Surge Protection Device KNX Bus 2 Wire IO I<sub>max</sub>  
5kA 110Vac Din Mount



<b>Component type</b>	Surge protection device for data networks/ MCR-technology
<b>Range</b>	Final Diverter
<b>Model</b>	N/A
<b>Product status</b>	Existing

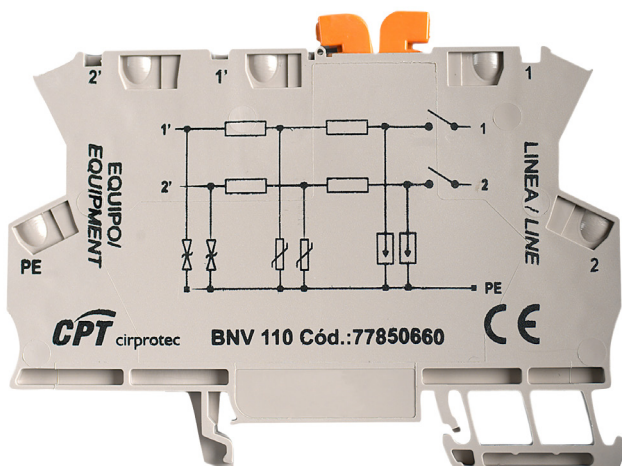

## ELECTRICAL

Nominal voltage AC	110 V
Max. continuous voltage AC	130.0 V
Nominal discharge surge current (8/20)	5.0 kA
Max. discharge surge current (8/20)	5.0 kA
Nominal load current	0.3 A
Voltage protection level core/earth	45.0 V
Frequency	3000000 MHz
Number of protected wires	2

## CONSTRUCTION

Mounting method	DIN rail (top hat rail) 35 mm
Degree of protection (IP)	IP20

## DIMENSIONS

Max. conductor cross section	2.5 mm <sup>2</sup>
Height	91.6 mm
Width	6.0 mm
Depth	63.2 mm
Weight	0.03 kg

# CPTBNV110

Cirprotec BNV Surge Protection Device KNX Bus 2 Wire IO I<sub>max</sub>  
5kA 110Vac Din Mount



## DIMENSIONAL DIAGRAM

