CS7PVB22

S+S CS7 Auxiliary Contact with 2NO Contacts and 2NC Contact Bifurcated Top Mount

CONTACTORS

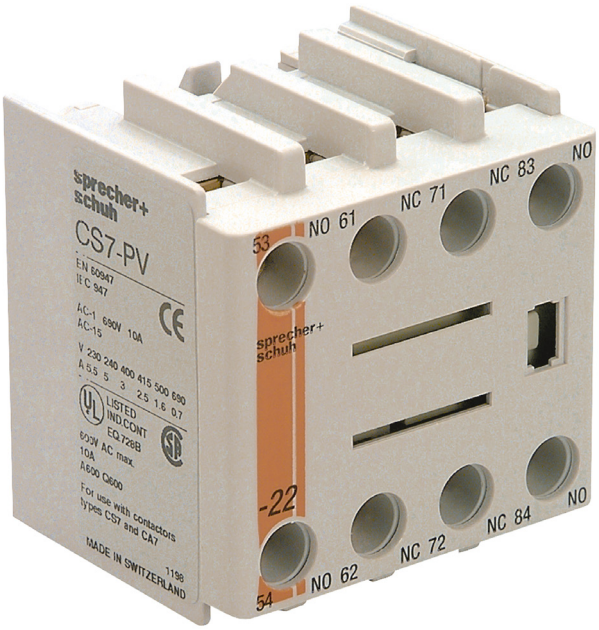

Component type	Auxiliary contact block
Range	CS7
Model	N/A
Product status	Existing

The Sprecher + Schuh CS7 Industrial Control Relays share the same modern design as the CA7 contactor range. Compact and built for heavy-duty industrial control applications where reliability and versatility are essential and available as either standard, master and bifurcated models.

ELECTRICAL	Number of contacts as normally open contact	2
	Number of contacts as normally closed contact	2
	Rated insulation voltage Ui	690 V
	Rated operation current Ie at AC-15, 24 V	3 A
	Rated operation current Ie at AC-15, 120 V	3 A
	Rated operation current Ie at AC-15, 240 V	3 A
	Rated operation current Ie at AC-15, 400 V	2 A
	Rated operation current Ie at DC-12, 24 V	6 A
	Rated operation current Ie at DC-12, 110 V	1 A
	Rated operation current Ie at DC-12, 220 V	0.5 A
	Rated operation current Ie at DC-13, 24 V	2.5 A
	Rated operation current Ie at DC-13, 110 V	0.6 A
	Rated operation current Ie at DC-13, 220 V	0.3 A
	Min. contact rating current	3 mA
	Min. contact rating voltage	5 V
	Rated operation current Ie at AC-15, 230 V	3 A
CONSTRUCTION	Mounting method	Top mounting
	Model	Top mounting

Published on 30 May 2026