
## **D7MKL22**

Sprecher and Schuh D7 Key Selector Switch 22.5 mm 2 Position Metal Spring Rtn Left Right Code 3825



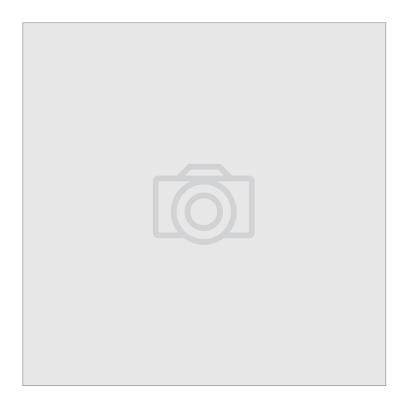

| Component type | Front element for selector switch |  |
|----------------|-----------------------------------|--|
| Range          | D7                                |  |
| Model          | N/A                               |  |
| Product status | Existing                          |  |

The Sprecher+Schuh D7 line of operator control devices are a diverse range of 22.5mm mount pushbuttons, pilot lights, selector switches, emergency stops, ideal for use in applications requiring reliable performance. A modular design allows for easy configuration and assembly. Available in plastic and metal types, optional accessories include enclosures, legend plates, padlocks and colour caps.

| ELECTRICAL   | Type of control element               | Key                 |
|--------------|---------------------------------------|---------------------|
| CONSTRUCTION | Colour control element                | Black               |
|              | Colour indicator light cap            | White               |
|              | Material front ring                   | Metal               |
|              | Colour front ring                     | Other               |
|              | Degree of protection (IP), front side | IP66                |
|              | With front ring                       | Yes                 |
|              | Degree of protection (NEMA)           | Other               |
| MECHANICAL   | Number of switch positions            | 2                   |
|              | Switching function latching           | No                  |
|              | Spring-return                         | Yes                 |
|              | Max. vibration acceleration           | 10 m/s <sup>2</sup> |
|              | Max. vibration frequency, operational | 2000 Hz             |
|              | Max. shock acceleration               | 100 g               |
|              | Mechanical life (service cycles)      | 300000 cycles       |
| PHOTOMETRIC  | Suitable for illumination             | No                  |
| DIMENSIONS   | Hole diameter                         | 22.5 mm             |
|              | Width opening                         | 29.6 mm             |
|              | Height opening                        | 47.1 mm             |
| ENVIRONMENT  | Operating temperature                 | -2570 °C            |

## D7MKL22

Sprecher and Schuh D7 Key Selector Switch 22.5 mm 2 Position Metal Spring Rtn Left Right Code 3825



## **DIMENSIONAL DIAGRAM**

