


D7X01

Sprecher and Schuh D7 Contact Block 1 NC for 22.5 mm Pushbutton Operators



PUSHBUTTON AND PILOT LIGHTS

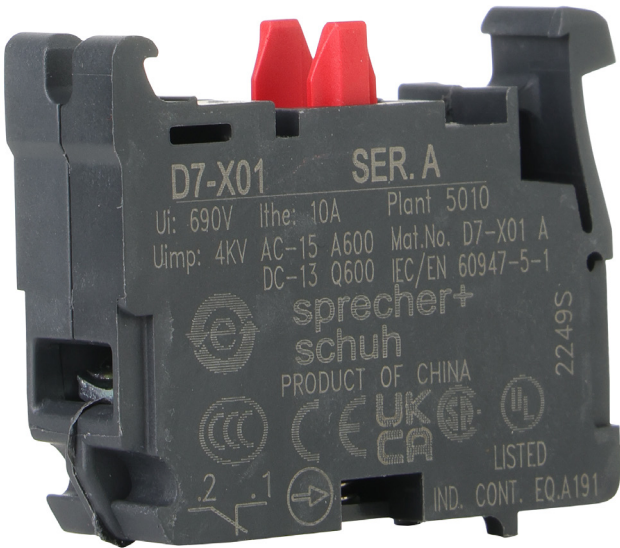

Component type	Auxiliary contact block
Range	D7
Model	N/A
Product status	Existing

The Sprecher + Schuh D7 line of operator control devices is a diverse range of 22.5mm mount pushbuttons, pilot lights, selector switches, and emergency stops, ideal for use in applications requiring reliable performance. Modular design allows for easy configuration and assembly. Available in plastic and metal types, optional accessories include enclosures, legend plates, padlocks, and colour caps.

ELECTRICAL

Number of contacts as normally closed contact	1
Rated insulation voltage Ui	690 V
Rated operation current Ie at AC-15, 120 V	6 A
Rated operation current Ie at AC-15, 240 V	3 A
Rated operation current Ie at AC-15, 400 V	1.8 A
Rated operation current Ie at DC-13, 125 V	0.55 A
Rated operation current Ie at DC-13, 250 V	0.27 A
Min. contact rating current	5 mA
Min. contact rating voltage	17 V

D7X01

Sprecher and Schuh D7 Contact Block 1 NC for 22.5 mm
Pushbutton Operators



PUSHBUTTON AND PILOT LIGHTS

sprecher+schuh

DIMENSIONAL DIAGRAM

