ECOEXITBLADE

Stanilite Economy Recessed LED Blade EXIT

Stanilite®



Component type	Emergency luminaire
Range	Single Point Economy Exit Lighting
Model	N/A
Product status	Existing

The Stanilite single point economy exit lighting range features larger terminals for faster installation, efficient lithium power and universal surface mount application.


ELECTRICAL	**Operating mode**	Maintained
	Nominal voltage	240 V
	Voltage type	AC
	Max. system power	4.3 W
	Viewing distance	24 m
	Nominal operation time	100000 h
	Driver type	LED
CONSTRUCTION	**With remote switch connection**	No
	With remote control	No
	Mounting method	Recessed
	With pictogram	Yes
	With light source	Yes
	Material housing	Polycarbonate (PC)
	Colour housing	White
	Material cover	Polycarbonate (PC)
	IP rating	IP20
PHOTOMETRIC	**Lamp type**	LED not exchangeable
	Photometric classification (C0)	D10
	Photometric classification	C10
DIMENSIONS	**Width**	110 mm
	Height/depth	185 mm
	Length	425 mm
	Built-in width	110 mm
ENVIRONMENT	**Rated ambient temperature according to IEC62722-2-1**	0…40 °C
CERTIFICATES/APPROVALS	**Compliant to AS/NZS CISPR 15**	Yes
	Compliant to AS/NZS 2293.3:2018	Yes


Published on 17 April 2026

CERTIFICATES/APPROVALS

Compliant to AS/NZS 60598.1:2017	Yes
Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

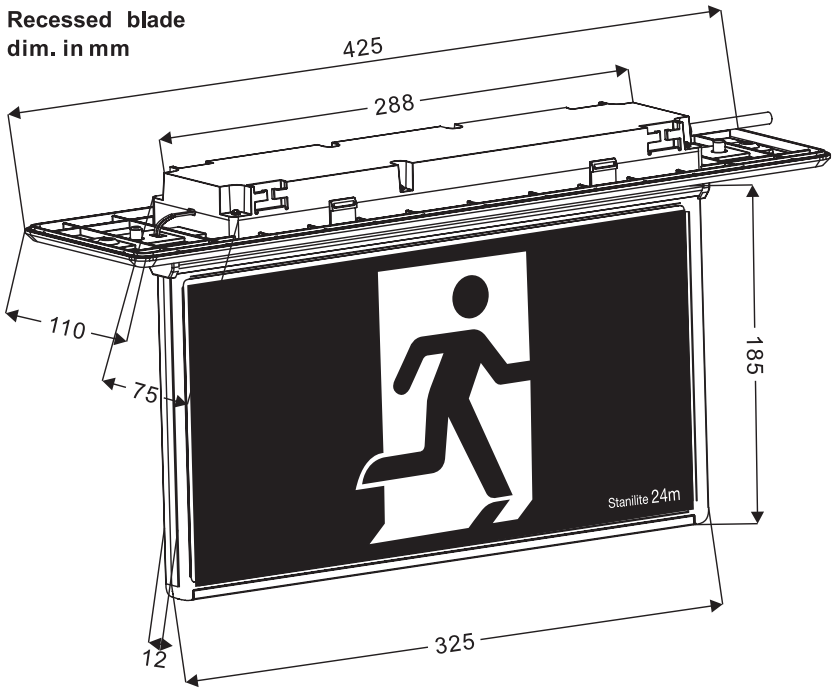

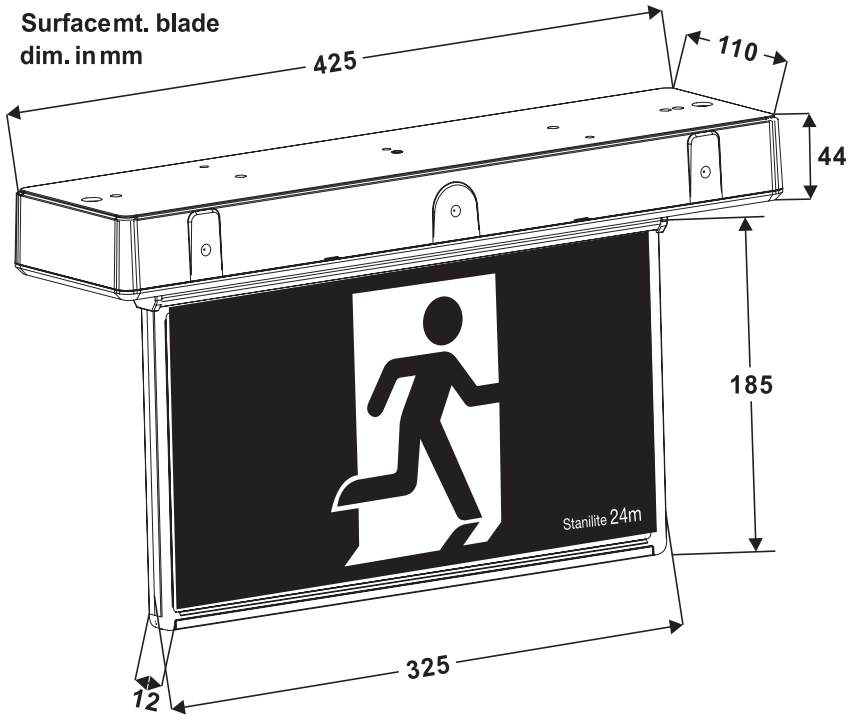

RELATED PRODUCTS

ACCESSORY



Item No: ECOEXITBLADESMKIT

Required: No

Description: Stanilite Surface Mount Kit for Recessed ECOEXITBLADE