# EEXRCSI561O1S5M

**Steute HAE Limit Switch Ex 1,2,21,22 Magnetic Coded Safety Sensor 5m**

LIMIT SWITCHES

.steute




| | |
|---|---|
| **Component type** | Limit switch |
| **Range** | HAE Limit Switch |
| **Model** | N/A |
| **Product status** | Existing |

Steute Technologies offer a wide range of explosion-proof HAE position limit switches for industrial applications, with optional safety functions. Explosion-proof limit switches are offered with thermoplastic or metal enclosures with slow or snap action. Ideal for use in areas with hazardous gas, vapours, mists, hazardous powder, dust or in extreme cold (down to -60°C).

| | | |
|---|---|---|
| **ELECTRICAL** | Number of contacts as normally closed contact | 1 |
| | Number of contacts as normally open contact | 1 |
| | Number of contacts as change-over contact | 0 |
| | Type of control element | Other |
| | Type of electric connection | With cable preassembled |
| | Rated operation current Ie at AC-15, 230 V | 0 A |
| | Rated operation current Ie at DC-13, 230 V | 0 A |
| | Forced opening | No |
| **COMMUNICATION** | Type of interface | None |
| | Type of interface for safety communication | None |
| **CONSTRUCTION** | Material housing | Plastic |
| | IP rating | IP67 |
| | Construction type housing | Other |
| | Alignment of the control element | Other |
| | Suitable for safety functions | Yes |
| **MECHANICAL** | Switching function | Other |
| | Switching function latching | No |
| **DIMENSIONS** | Cable length | 5 m |
| | Height of sensor | 16 mm |
| | Length of sensor | 50 mm |
| | Width sensor | 40 mm |
| **ENVIRONMENT** | Rated temperature | -20…70 °C |
| **CERTIFICATES/APPROVALS** | Explosion safety category for gas | Other |
| | Explosion safety category for dust | Other |



Published on 20 October 2026


# EEXRCSI561O1S5M

**Steute HAE Limit Switch Ex 1,2,21,22 Magnetic Coded Safety Sensor 5m**

LIMIT SWITCHES

.steute

## DIMENSIONAL DIAGRAM

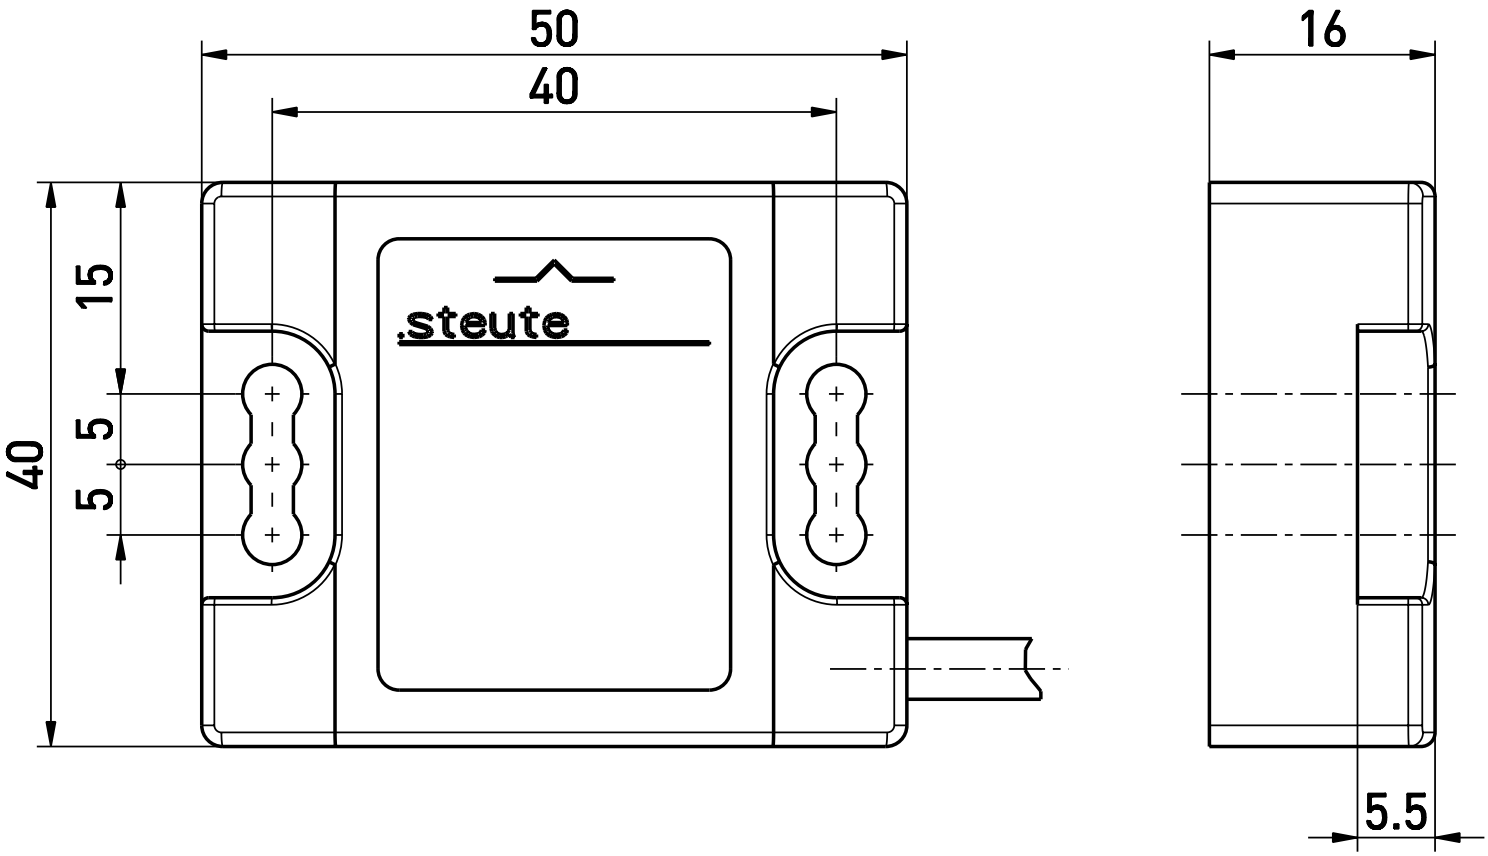






Published on 20 October 2026