


GB224184BF

NHP POWERMAX GB Isolation Busbar Chassis DIN T 250A 24
Way 4Pole Bottom Feed RNWNBN

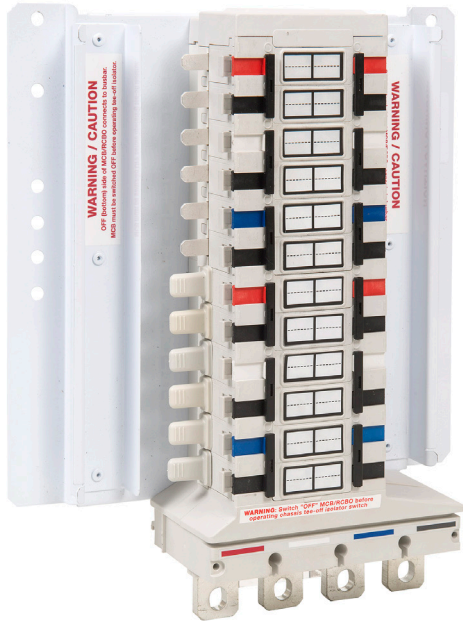

Component type	Distributor assembly busbars
Range	DIN-T GB
Model	N/A
Product status	Existing

NHP's POWERMAX DIN T GB Busbar Chassis is a high-performance electrical distribution solution. This 250A chassis provides a quick and easy method to connect DIN-T MCB's and RCBO's. Made of high-quality copper, providing superior conductivity, along with durable busbar supports providing high withstand ratings ensuring efficient performance and a longer lifespan of the electrical system.

ELECTRICAL

Rated current	250.0 A
Number of poles	24.0
Number of phases input	3P+N
Nominal voltage	415.0 V
Short time withstand current Icw, 0.2 sec	25.0 kA
Short time withstand current Icw, 0.3 sec	20.0 kA
Short time withstand current Icw, 1 sec	10.0 kA

CONSTRUCTION

Assembly arrangement	18mm pitch
Material housing	Encapsulated material
Suitable for devices with N-conductor	Yes
Tee-off isolator	Yes
Capped tee-offs	0.5
Degree of protection (IP)	IP20

DIMENSIONS

Depth	82.0 mm
Height (pan)	248.0 mm