


IMCBHSAC

ProSoft Gateway Ethernet to Belden 9463 Blue Hose Industrial Media Converters Non-CE

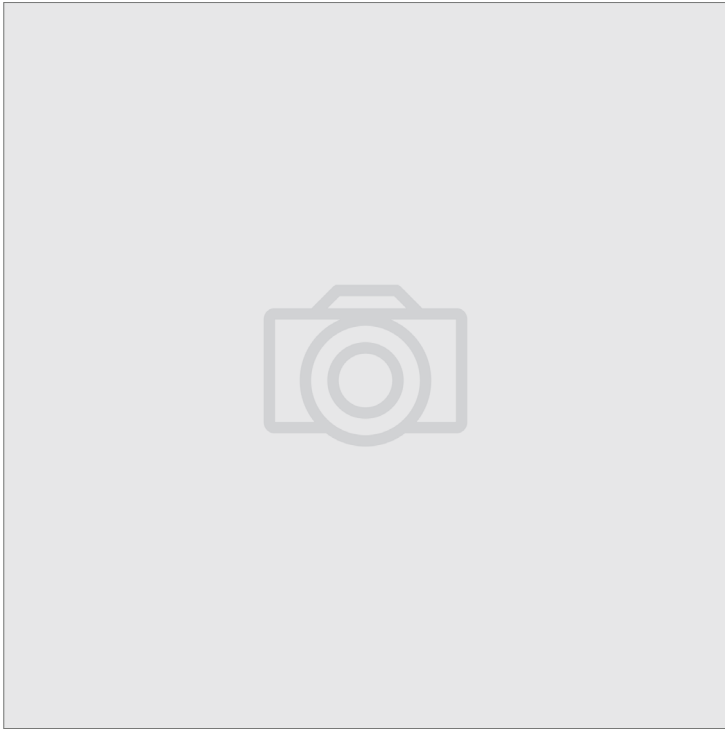

Component type	Fieldbus, decentr. periphery - communication module
Range	Stand-alone
Model	N/A
Alternative	NO ALTERNATIVE ITEM

The ProSoft Technology stand-alone DIN rail-mounted industrial gateways provide an easy to use solution to read or write data from devices using different protocols. All Prosoft gateways are equipped with ProSoft Discovery Service (PDS) software which automatically detects the default IP address without being on the same subnet, saving setup time and enabling faster configurations of our networks

ELECTRICAL	Voltage type of supply voltage	AC
	Supply voltage AC 50 Hz	120 - 240 V
	Supply voltage AC 60 Hz	120 - 240 V
DIMENSIONS	Width	6.7 mm
	Height	21.0 mm
	Depth	1.9 mm