NHP MOD6 Residual Current Device - Short body w/ Overcurrent 6kA 10A 1PN C Curve 30mA Type A 2 Screw





Component type	Earth leakage circuit breaker	
Range	MOD6 RCD	
Model	N/A	
Product status	Existing	

NHP MOD6 residual current devices (RCDs) offer a 6kA rating with a proven history in domestic and commercial applications. The MOD6 RCD range offers many solutions for both 1 phase in 10mA and 30mA sensitivities as well as 3 phase in 30mA sensitivities. The MOD6 RCDs can be easily installed into NHP loadcentres, as well as Concept One distribution panelboards.


ELECTRICAL	Rated current	10.0 A
	Rated voltage	240.0 V
	Rated leakage current	30.0 mA
	Frequency	50/60 Hz
	Rated short-circuit breaking capacity according to AS/NZS 61009	6.0 kA
	Voltage type	AC
	Trip curve	С
	Rated impulse withstand voltage Uimp	6.0 kV
	Leakage current type	A
	Tripping time	40.0 ms
	Service voltage (Min)	195.0 V
	Max. operating voltage (Umax)	255.0 V
	Rated residual make/break capacity	6000.0 A
	Protected neutral pole	No
	Number of poles (total)	2.0
	Electrical life at Un, In (service cycles)	10000.0 cycles
	Type of electric connection	Pin
	Isolator application	Yes
	Rated insulation voltage Ui	500.0 V
	Concurrently switching neutral conductor	Yes
CONSTRUCTION	Mounting method	DIN rail (top hat rail) 35 mm
	Degree of protection (IP)	IP20
	Number of protected poles	1.0
MECHANICAL	Mechanical life (service cycles)	20000.0 cycles
	Shock duration (Max)	5.0 ms
	Shock acceleration (Max)	40.0 g

NHP MOD6 Residual Current Device - Short body w/ Overcurrent 6kA 10A 1PN C Curve 30mA Type A 2 Screw



MECHANICAL	Vibration acceleration (Max)	2.0 m/s ²
	Vibration frequency, operational (Max)	80.0 Hz
	Vibration duration (Max)	30.0 min
DIMENSIONS	Depth	76.0 mm
	Height	86.0 mm
	Width	18.0 mm
	Weight	0.13 kg
ENVIRONMENT	Operating temperature	-5 - 55 °C
	Pollution degree	3.0

DIMENSIONAL DIAGRAM

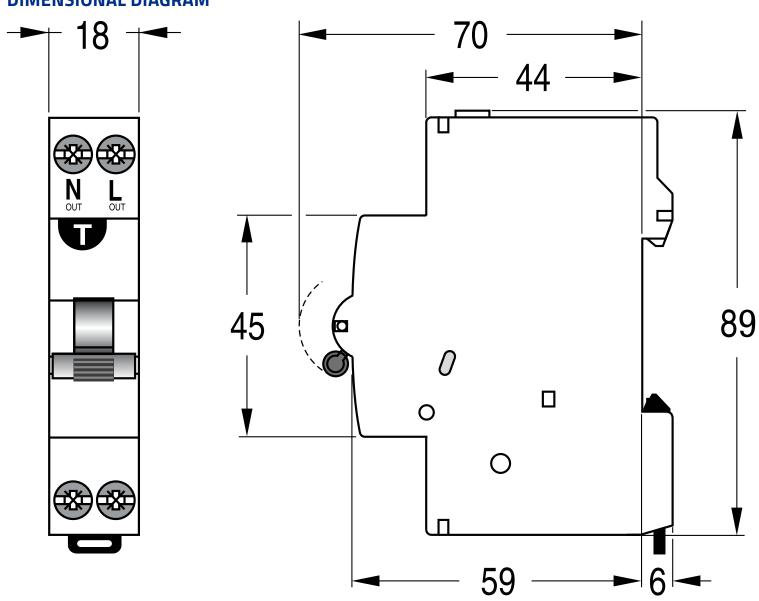

NHP MOD6 Residual Current Device - Short body w/ Overcurrent 6kA 10A 1PN C Curve 30mA Type A 2 Screw



RELATED PRODUCTS

ACCESSORY



Item No: DTLD
Required: No

Description: NHP DIN-T LOCKDIN Locking Device Removable Individual Piece 8mm

Description: NHP DIN-T Miniature Circuit Breaker Bus Comb 18 Way Pin Type 90 Degree 80A End Feed 130A Centre Feed

Item No: IBCEC1
Required: No

Description: NHP DIN-T Miniature Circuit Breaker Busbar Comb Endcap for 1Pole IBC



Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb 13 1PN Pin Type 90 Deg 80A End Feed 100A Centre Feed

Item No: IBD218P Required: No

Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb 18 Way 1PN Pin 80A

End Feed 100A Centre Feed

Item No: IBD255P Required: No

Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb 55 Way 1PN Pin 80A

End Feed 100A Centre Feed

Item No: IBDEC2
Required: No

Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb Endcap for 2Pole IBD

Item No: IBDEC4
Required: No

Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb Endcap for 4Pole IBD

Item No: ICL121F Required: No

Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb 12 Way 1P Fork 90 Deg

90A End Feed 150A Centre Feed

Item No: ICL181F Required: No

Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb 18 Way 1P Fork 90 Deg

80A End Feed 130A Centre Feed

Item No: ICL41F Required: No

Description: NHP MOD6 Miniature Circuit Breaker Busbar Comb 04 Way 1P Fork 80A

End Feed and 130A Centre Feed

Item No: ICL561F Required: No

Description: NHP DIN-T Miniature Circuit Breaker Bus Comb 57 Way 1Pole Fork Type

110A End Feed 130A Centre Feed



NHP MOD6 Residual Current Device - Short body w/ Overcurrent 6kA 10A 1PN C Curve 30mA Type A 2 Screw



RELATED PRODUCTS

ACCESSORY

Item No: ICL573F Required: No

Description: NHP DIN-T Miniature Circuit Breaker Bus Comb 57 Way 3Pole Fork Type

120A End Feed 130A Centre Feed