


# TM2IA34

IME TM2 Transducer Input 5A Output 0 to 20mA Self Supplied

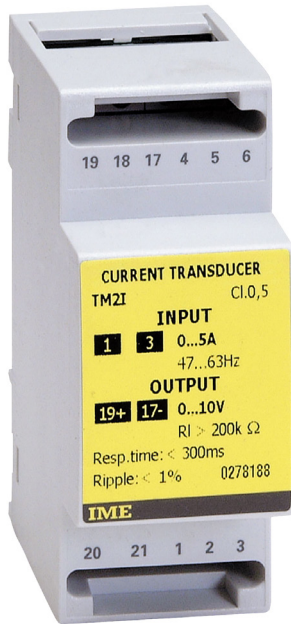

Component type	Current transformer
Range	Transducer
Model	N/A
Product status	Existing

The IME transducers provide a comprehensive range of transducers for AC and DC voltage and current as well as fully programmable units. With options for scalable output AC current transducer and all-in-one current transformers and transducers, IME transducers can fit a wide range of applications.

## ELECTRICAL

Primary rated current	5.0 A
Secondary rated current	0.02 A
Rated operating frequency	47 - 63 Hz
Accuracy class	0.5
Power loss	2.0 W
Calibrated	Yes

## CONSTRUCTION

Material housing	Polycarbonate (PC)
Model	Through-feed current converter
With shock protection	Yes
Number of primary inputs	1.0

## ENVIRONMENT

Storage temperature	-25 - 70 °C
---------------------	-------------