150SB3NUD

Allen-Bradley SMC-50 Soft Starter Solid-State 690V 140A 240V AC Control

SOFT STARTERS



Component type	Soft starter
Range	SMC 50
Model	N/A
Product status	Existing

The Allen-Bradley's SMC-50 soft starters are designed to provide smooth, controlled starting and stopping of motors. Available with a current range from 104A to 480 A with internal bypass and from 90A to 520A in the solid state form. With advanced monitoring and protection functions, superior communication capability, and energy saver mode increases efficiency and reduce downtime.

ELECTRICAL	**Rated operating voltage Ue**	200 V
	Torque control	Yes
	Control supply voltage Us at AC 50HZ	100 V
	Control supply voltage Us at AC 60HZ	100 V
	Voltage type for actuating	AC
	Rated control supply voltage Us at AC 50HZ	100-240 V
	Rated control supply voltage Us at AC 60HZ	100-240 V
	Function	Single direction
CONSTRUCTION	**With display**	No
	IP rating	IP00
DIMENSIONS	**Height**	762 mm
	Width	609.6 mm
	Depth	304.8 mm


Published on 05 November 2026

150SB3NUD

Allen-Bradley SMC-50 Soft Starter Solid-State 690V 140A 240V AC Control

SOFT STARTERS

DIMENSIONAL DIAGRAM

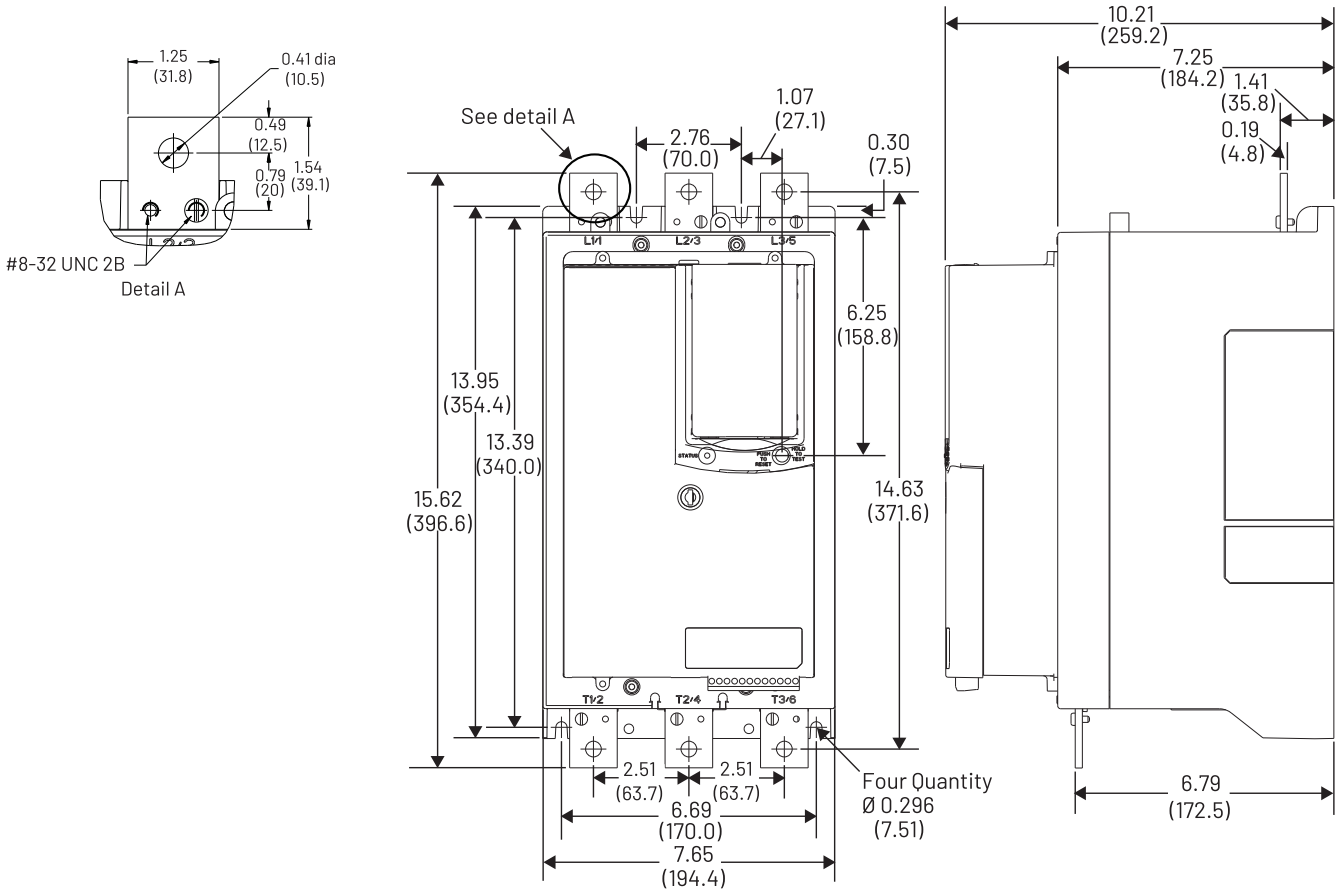

Published on 05 November 2026