
1734IB8

Allen-Bradley Point I/O 8-Point Digital Input Sink Module 24V DC

IN CABINET DISTRIBUTED IO

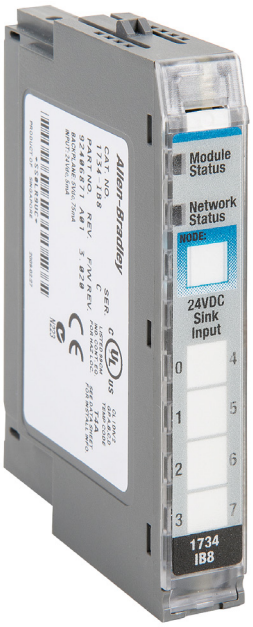

Component type	Fieldbus, decentr. periphery - analogue/digital I/O module
Range	Point I/O
Model	N/A
Product status	Existing

The Allen-Bradley POINT I/O™ family of modular I/O products offer digital, analogue, specialty, and safety-rated I/O modules, with one to eight points per module. The ability to mix standard and safety I/O in the same POINT I/O™ system provides great flexibility and opportunities for standardization, regardless of application requirements.

ELECTRICAL	Type of voltage (input voltage)	DC
	Type of output voltage	DC
	Permitted voltage at input	10-28.8 V
	Supply voltage DC	24-24 V
	Type of digital input	Sinking
CONSTRUCTION	Suitable for safety functions	No
	Number of digital inputs	8
DIMENSIONS	Width	12 mm
	Height	56 mm
	Depth	75.5 mm
ENVIRONMENT	Operating temperature	-20…55 °C
	Storage temperature	-40…85 °C
	Max. ambient humidity (non-condensing)	95 %

Published on 07 October 2026

DIMENSIONAL DIAGRAM

