
# 1734IE4C

**Allen-Bradley Point I/O 4-Point Analogue Input High Density Current Module**

IN CABINET DISTRIBUTED IO

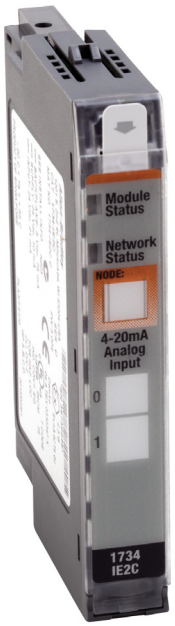


| | |
|---|---|
| **Component type** | Fieldbus, decentr. periphery - analogue/digital I/O module |
| **Range** | Point I/O |
| **Model** | N/A |
| **Product status** | Existing |

The Allen-Bradley POINT I/O™ family of modular I/O products offer digital, analogue, specialty, and safety-rated I/O modules, with one to eight points per module. The ability to mix standard and safety I/O in the same POINT I/O™ system provides great flexibility and opportunities for standardization, regardless of application requirements.

| | | |
|---|---|---|
| **ELECTRICAL** | **Type of voltage (input voltage)** | DC |
| | **Resolution of the analogue inputs** | 16 Bit |
| | **Analogue input signal configurable** | Yes |
| | **Supply voltage DC** | 24-24 V |
| | **Analogue inputs configurable** | Yes |
| | **Analogue input, current** | Yes |
| **CONSTRUCTION** | **Suitable for safety functions** | No |
| | **Number of analogue inputs** | 4 |
| **DIMENSIONS** | **Width** | 12 mm |
| | **Height** | 56 mm |
| | **Depth** | 75.5 mm |
| **ENVIRONMENT** | **Operating temperature** | -20…55 °C |
| | **Storage temperature** | -40…85 °C |
| | **Max. ambient humidity (non-condensing)** | 95 % |



Published on 09 October 2026

# 1734IE4C

**Allen-Bradley Point I/O 4-Point Analogue Input High Density Current Module**

IN CABINET DISTRIBUTED IO

## DIMENSIONAL DIAGRAM

