


1794IB32

Allen-Bradley Flex IO 32DI 24V DC Sink Module

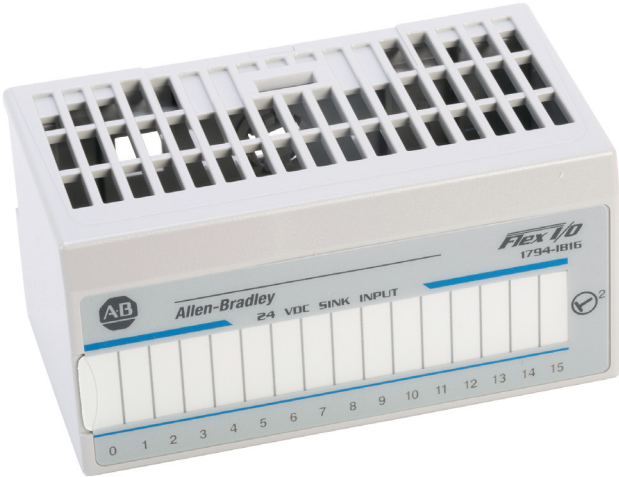

Component type	Fieldbus, decentr. periphery - analogue/digital I/O module
Range	FLEX I/O
Model	N/A
Product status	Existing

The Allen-Bradley FLEX™ I/O system offers a flexible, modular, and cost-effective solution for your industrial automation and control. The space saving design offers rack-based I/O functionality of up to eight modules and provides digital, analog, HART analog, and specialty I/O with 4...32 points per module with flexible mounting and wiring options.

ELECTRICAL

Type of voltage (input voltage)	DC
Type of output voltage	DC
Permitted voltage at input	19.2-31.2 V
Supply voltage DC	24-24 V
Type of digital input	Sinking

CONSTRUCTION

Suitable for safety functions	No
Number of digital inputs	32

DIMENSIONS

Width	94 mm
Height	45.7 mm
Depth	53.3 mm

ENVIRONMENT

Operating temperature	0...55 °C
Storage temperature	-40...85 °C
Max. ambient humidity (non-condensing)	95 %