93234008

Socomec ATyS M Remote Transfer Switch - ATyS dM, No Integrated Logic, 4 Pole 80A

REMOTE TRANSFER SWITCHES



Component type	Switch disconnector
Range	ATyS M Remote
Model	N/A
Product status	Existing

The ATyS M range of compact motorised changeover switches include single-phase and three-phase models from 40 to 160A. Solenoid operation ensures fast switching, mechanical and electrical interlocking ensures safe operation. Volt-free contact allows switching from I, O, II via control logic. Dual power supply provides full security of the 3 position commands with the availability of either supply.

ELECTRICAL	**Rated operating voltage Ue**	800 V
	Max. rated operation voltage Ue AC	800 V
	Rated permanent current at AC-21, 400 V	80 A
	Rated control supply voltage Us at AC 50HZ	400-690 V
	Rated uninterrupted current Iu	80 A
	Number of poles	4
	Rated operation power at AC-23, 400 V	40 kW
	Rated short-time withstand current Icw	4 kA
	Rated insulation voltage Ui	600 V
	Type of control element	Other
	Type of electrical connection of main circuit	Screw connection
	Rated operating voltage	400-690 V
	Rated permanent current at AC-23, 400 V	80 A
	Switching power at 400 V	40 kW
	Conditioned rated short-circuit current Iq	50 kA
	Number of auxiliary contacts as normally closed contact	0
	Number of auxiliary contacts as normally open contact	0
	Number of auxiliary contacts as change-over contact	3
	Motor drive optional	No
	Motor drive integrated	Yes
	Voltage release optional	No
CONSTRUCTION	**Device construction**	Built-in device fixed built-in technique
	Colour control element	Other
	Degree of protection (IP), front side	IP20

Published on 24 July 2026

93234008

Socomec ATyS M Remote Transfer Switch - ATyS dM, No Integrated Logic, 4 Pole 80A

REMOTE TRANSFER SWITCHES

CONSTRUCTION	Version as main switch	Yes
	Version as maintenance-/service switch	Yes
	Version as safety switch	Yes
	Version as emergency stop installation	No
	Version as reversing switch	Yes
	Number of switches	2
	Suitable for front mounting 4-hole	No
	Suitable for front mounting centre	No
	Suitable for distribution board installation	Yes
	Suitable for intermediate mounting	Yes
	Interlockable	Yes
MECHANICAL	Padlock locking	Yes
DIMENSIONS	Height	245 mm
	Width	324 mm
	Depth	73.5 mm
	Weight	4.28 kg

DIMENSIONAL DIAGRAM

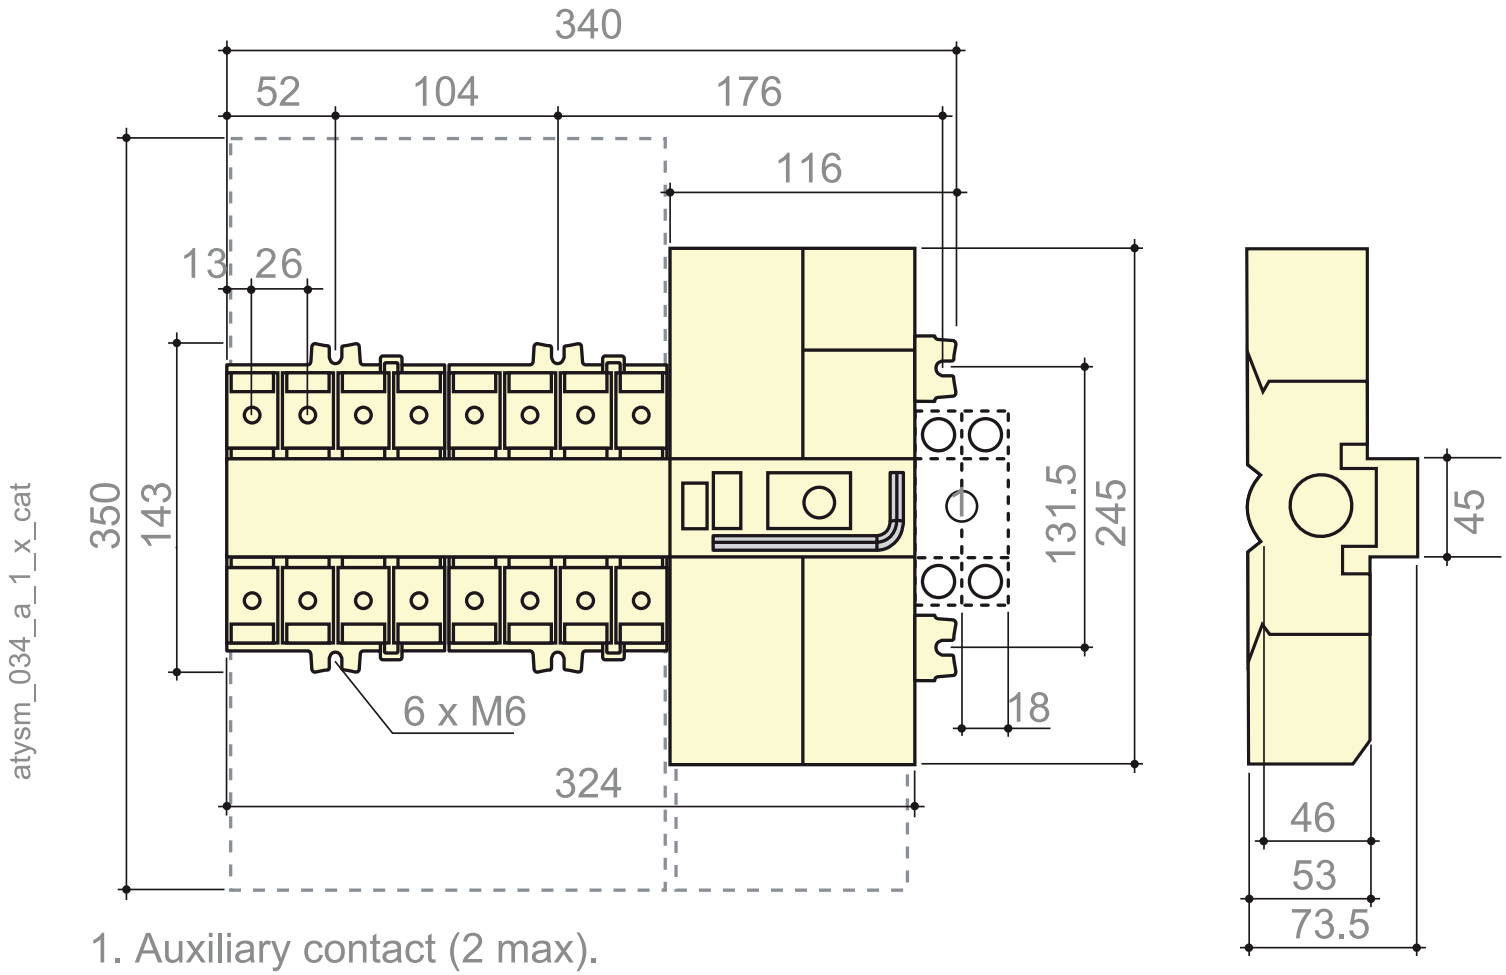

1. Auxiliary contact (2 max).

Published on 24 July 2026