


GB224182U

NHP POWERMAX GB Isolation Busbar Chassis DIN-T 250A 24 Way 2Pole Universal Red Black

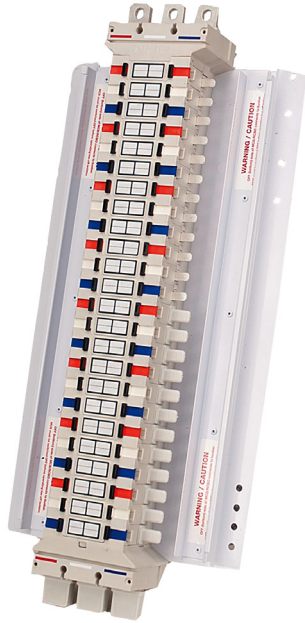

| | |
|-----------------------|------------------------------|
| Component type | Distributor assembly busbars |
| Range | DIN-T GB |
| Model | N/A |
| Product status | Existing |

NHP's POWERMAX DIN T GB Busbar Chassis is a high-performance electrical distribution solution. This 250A chassis provides a quick and easy method to connect DIN-T MCB's and RCBO's. Made of high-quality copper, providing superior conductivity, along with durable busbar supports providing high withstand ratings ensuring efficient performance and a longer lifespan of the electrical system.

ELECTRICAL

| | |
|--|---------|
| Rated current | 250.0 A |
| Number of poles | 24.0 |
| Number of phases input | 1P+N |
| Nominal voltage | 415.0 V |
| Short time withstand current <i>I_{cw}</i> , 0.2 sec | 25.0 kA |
| Short time withstand current <i>I_{cw}</i> , 0.3 sec | 20.0 kA |
| Short time withstand current <i>I_{cw}</i> , 1 sec | 10.0 kA |

CONSTRUCTION

| | |
|---------------------------------------|-----------------------|
| Assembly arrangement | 18mm pitch |
| Material housing | Encapsulated material |
| Suitable for devices with N-conductor | Yes |
| Tee-off isolator | Yes |
| Capped tee-offs | 0.5 |
| Degree of protection (IP) | IP20 |

DIMENSIONS

| | |
|--------------|----------|
| Depth | 82.0 mm |
| Height (pan) | 248.0 mm |