


# GB272182U

NHP POWERMAX GB Isolation Busbar Chassis DIN-T 250A 72 Way 2Pole Universal Red Black

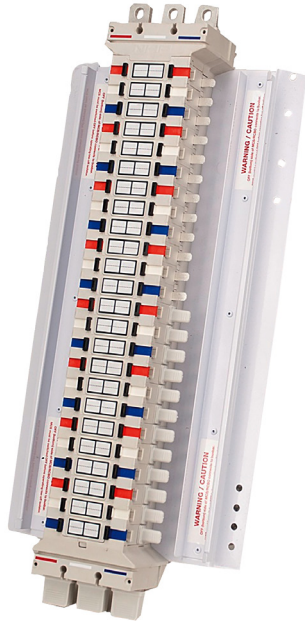

<b>Component type</b>	Distributor assembly busbars
<b>Range</b>	DIN-T GB
<b>Model</b>	N/A
<b>Product status</b>	Existing

NHP's POWERMAX DIN T GB Busbar Chassis is a high-performance electrical distribution solution. This 250A chassis provides a quick and easy method to connect DIN-T MCB's and RCBO's. Made of high-quality copper, providing superior conductivity, along with durable busbar supports providing high withstand ratings ensuring efficient performance and a longer lifespan of the electrical system.

## ELECTRICAL

Rated current	250.0 A
Number of poles	72.0
Number of phases input	1P+N
Nominal voltage	415.0 V
Short time withstand current Icw, 0.2 sec	25.0 kA
Short time withstand current Icw, 0.3 sec	20.0 kA
Short time withstand current Icw, 1 sec	10.0 kA

## CONSTRUCTION

Assembly arrangement	18mm pitch
Material housing	Encapsulated material
Suitable for devices with N-conductor	Yes
Tee-off isolator	Yes
Capped tee-offs	0.5
Degree of protection (IP)	IP20

## DIMENSIONS



Depth	82.0 mm
Height (pan)	680.0 mm

# GB272182U

NHP POWERMAX GB Isolation Busbar Chassis DINT 250A 72  
Way 2 Pole Universal Red Black



## DIMENSIONAL DIAGRAM

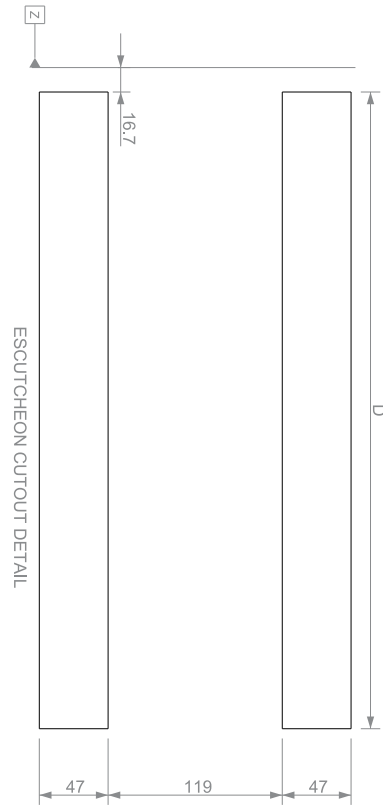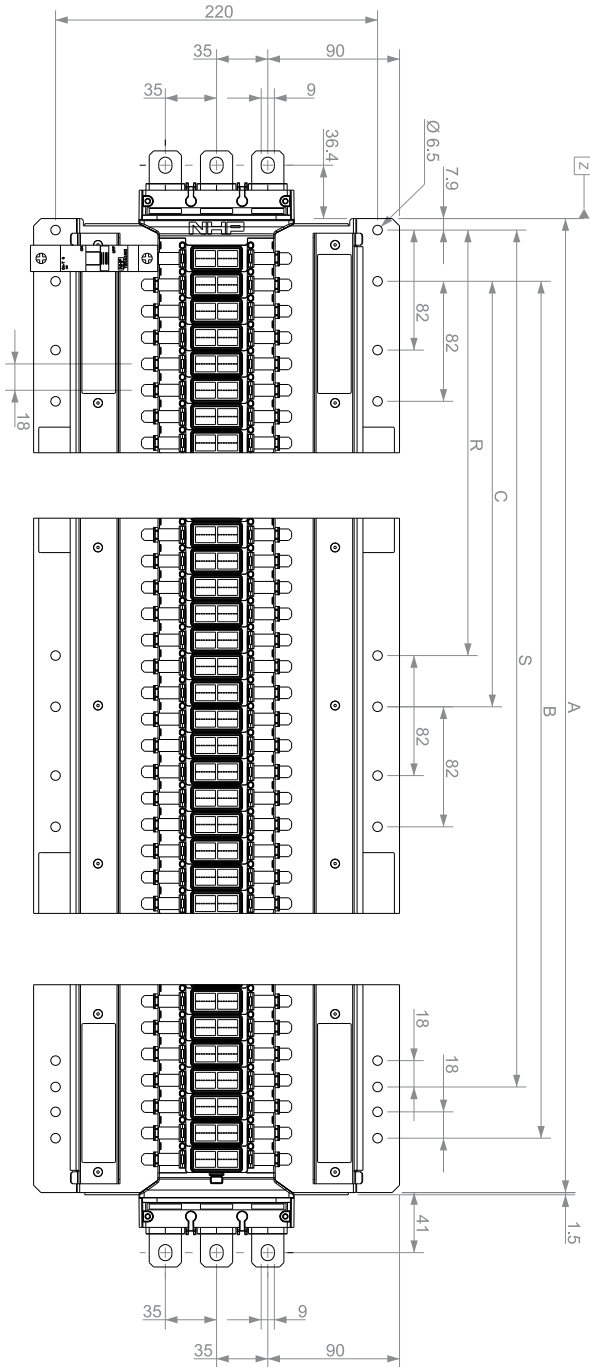

GB212183L\_0DIM2-501

No. of Poles	A	B	C	R	S	D
12	140	-	-	-	-	110
24	248	100	-	-	100	218
36	356	200	-	-	200	326
48	464	400	-	-	400	434
60	572	500	-	-	500	542
72	680	600	300	300	600	650
84	788	700	300	300	700	758
96	896	800	400	400	800	866