


# NC272184BF

NHP POWERMAX DIN T NC Busbar Chassis 250A 72 Way 4Pole  
Bottom Feed RNWBNB

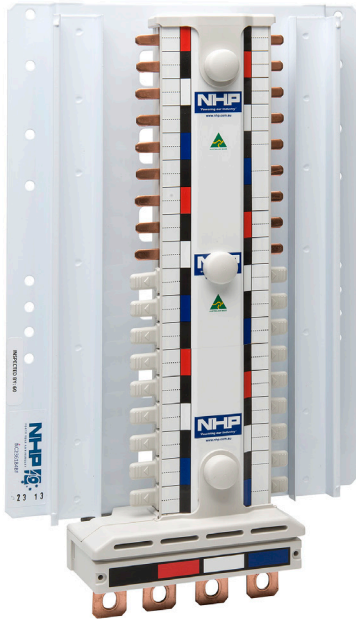

|                       |                              |
|-----------------------|------------------------------|
| <b>Component type</b> | Distributor assembly busbars |
| <b>Range</b>          | DIN-T NC BC                  |
| <b>Model</b>          | N/A                          |
| <b>Product status</b> | Existing                     |

NHP's POWERMAX DIN T NC Busbar Chassis are a high-performance, electrical distribution solution. Available in 250A or 400A and designed to provide a quick and easy method to connect DIN-T MCB's and RCBO's. Made of high-quality copper, providing superior conductivity, along with strong durable busbar supports providing high withstand ratings, ensuring a longer lifespan of the electrical system.

## ELECTRICAL

|  |         |
|--|---------|
| Rated current  | 250.0 A |
| Number of poles  | 72.0    |
| Number of phases input                                 | 3P+N    |
| Nominal voltage  | 415.0 V |
| Short time withstand current I <sub>cw</sub> , 0.1 sec | 25.0 kA |
| Short time withstand current I <sub>cw</sub> , 0.3 sec | 20.0 kA |
| Short time withstand current I <sub>cw</sub> , 1 sec   | 10.0 kA |

## CONSTRUCTION

|                                       |                       |
|---------------------------------------|-----------------------|
| Assembly arrangement                  | 18mm pitch            |
| Material housing                      | Encapsulated material |
| Suitable for devices with N-conductor | Yes                   |
| Tee-off isolator                      | No                    |
| Capped tee-offs                       | 0.5                   |
| Degree of protection (IP)             | IP20                  |

## DIMENSIONS

|              |          |
|--------------|----------|
| Depth        | 82.0 mm  |
| Height (pan) | 674.0 mm |