


# NCH418273U

NHP POWERMAX DIN T NCH Busbar Chassis 400A 18 Way  
27mm 3Pole Universal

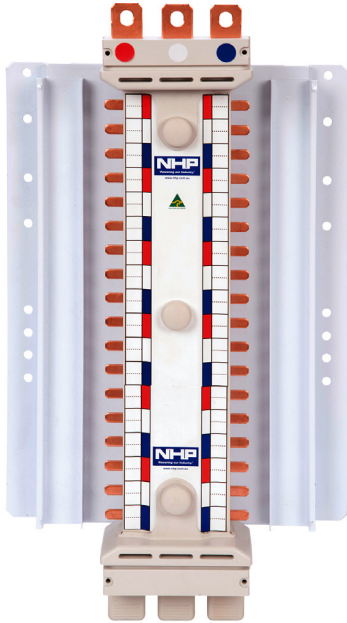

|                       |                              |
|-----------------------|------------------------------|
| <b>Component type</b> | Distributor assembly busbars |
| <b>Range</b>          | DIN-T NC BC                  |
| <b>Model</b>          | N/A                          |
| <b>Product status</b> | Existing                     |

NHP's POWERMAX DIN T NC Busbar Chassis are a high-performance, electrical distribution solution. Available in 250A or 400A and designed to provide a quick and easy method to connect DIN-T MCB's and RCBO's. Made of high-quality copper, providing superior conductivity, along with strong durable busbar supports providing high withstand ratings, ensuring a longer lifespan of the electrical system.

## ELECTRICAL

|   |         |
|---|---------|
| Rated current                                   | 400.0 A |
| Number of poles                                 | 18.0    |
| Number of phases input                          | 3-phase |
| Nominal voltage                                 | 415.0 V |
| Short time withstand current $I_{cw}$ , 0.1 sec | 30.0 kA |
| Short time withstand current $I_{cw}$ , 0.3 sec | 25.0 kA |
| Short time withstand current $I_{cw}$ , 1 sec   | 13.0 kA |

## CONSTRUCTION

|                           |                       |
|---------------------------|-----------------------|
| Assembly arrangement      | 27mm pitch            |
| Material housing          | Encapsulated material |
| Tee-off isolator          | No                    |
| Capped tee-offs           | 0.5                   |
| Degree of protection (IP) | IP20                  |

## DIMENSIONS

|              |          |
|--------------|----------|
| Depth        | 82.0 mm  |
| Height (pan) | 267.0 mm |