


CZE7180

S+S CA7 Timer Pneumatic On Delay 180s



CONTACTORS

sprecher+schuh

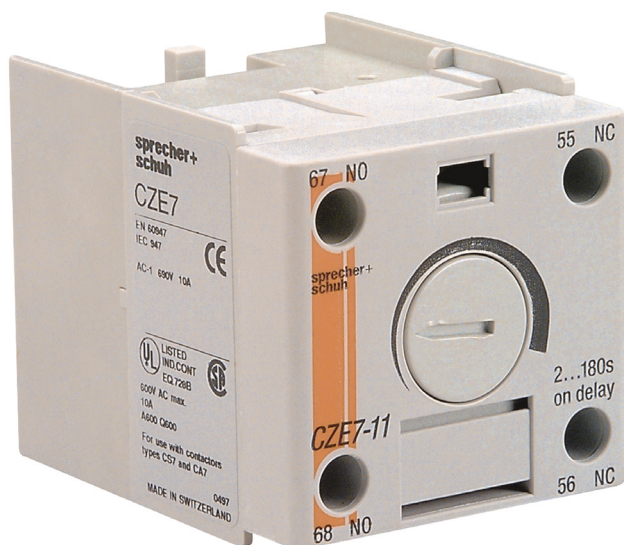

Component type	Timer relay
Range	CA7
Model	N/A
Product status	Existing

The Sprecher + Schuh CA7 contactors are the ideal solution for reliable and durable electrical components. It is a modern and flexible IEC power contactor for DOL starting needs with up to 100A AC3 and wide range selection covering from 4kW up to 63kW (400V).

ELECTRICAL

Voltage type for actuating	AC
Rated control supply voltage U_s at AC 50HZ	346-440 V
Number of outputs, delayed, change-over contact	1
Type of electric connection	Screw connection
Function delay-on energization	No
Function delay on de-energization	No
Function floating contact on energization	No
Function floating contact on de-energization	No
Function star-delta	No
Function pulse shaping	No
Function flashing, starting with pause, fixed time	No
Function flashing, starting with pulse, fixed time	No
Clock function, starting with pause, variable	No
Clock function, starting with pulse, variable	No
Time range	180 s
Time setting accuracy	5 %
Power supply reset time	50 ms
Power consumption	0.5 VA
Electrical lifespan (control contacts)	200000 c (contacts)

MECHANICAL

Suitable for DIN rail (top hat rail) mounting	Yes
Mechanical lifetime (control contacts)	3.0E7 c (contacts)
Max. shock acceleration	50 g
Max. vibration acceleration	4 m/s ²
Max. vibration frequency, operational	100 Hz

CZE7180

S+S CA7 Timer Pneumatic On Delay 180s



CONTACTORS



DIMENSIONS

Height	80 mm
Depth	109 mm
Width	22.5 mm

ENVIRONMENT

Operating temperature	-25...45 °C
-----------------------	-------------