DMB51CW24

Carlo Gavazzi Timer Relay Multi Function 12V to 240V AC DC Supply 2CO 0.1-Sec100Hr

TIME DELAY RELAYS



Component type	Timer relay
Range	Timer Relays
Model	N/A
Product status	Discontinued

The Carlo Gavazzi Timers are ideal in a wide range of applications in automation, such as motor control centres, packaging machinery, HVAC equipment, control panels and process control systems. The range offers solutions for various functions, mountings, and output type.

ELECTRICAL

Voltage type for actuating	AC/DC
Rated control supply voltage Us at DC	12-240 V
Rated control supply voltage Us at AC 60HZ	12-240 V
Rated control supply voltage Us at AC 50HZ	12-240 V
Number of outputs, delayed, change-over contact	1
Rated operation current Ie at DC-12, 24 V	0.2 A
Rated operation current Ie at DC-13, 24 V	2.5 A
Rated operation current Ie at AC-15, 250 V	2.5 A
Type of electric connection	Screw connection
Function delay-on energization	No
Function delay on de-energization	No
Function floating contact on energization	No
Function floating contact on de-energization	No
Function star-delta	No
Function pulse shaping	No
Function flashing, starting with pause, fixed time	No
Function flashing, starting with pulse, fixed time	No
Clock function, starting with pause, variable	Yes
Clock function, starting with pulse, variable	Yes
Time range	0.1-360000 s
Time setting accuracy	5 %
Power supply reset time	50 ms
Power consumption	0.5 VA
Electrical lifespan (control contacts)	200000 c (contacts)

Published on 22 May 2026


DMB51CW24

Carlo Gavazzi Timer Relay Multi Function 12V to 240V AC DC Supply 2CO 0.1-Sec100Hr

TIME DELAY RELAYS

MECHANICAL	Suitable for DIN rail (top hat rail) mounting	Yes
	Mechanical lifetime (control contacts)	3.0E7 c (contacts)
	Max. shock acceleration	50 g
	Max. vibration acceleration	4 m/s²
	Max. vibration frequency, operational	100 Hz
DIMENSIONS	Height	81 mm
	Depth	67 mm
	Width	17.5 mm
ENVIRONMENT	Operating temperature	-25…45 °C

DIMENSIONAL DIAGRAM

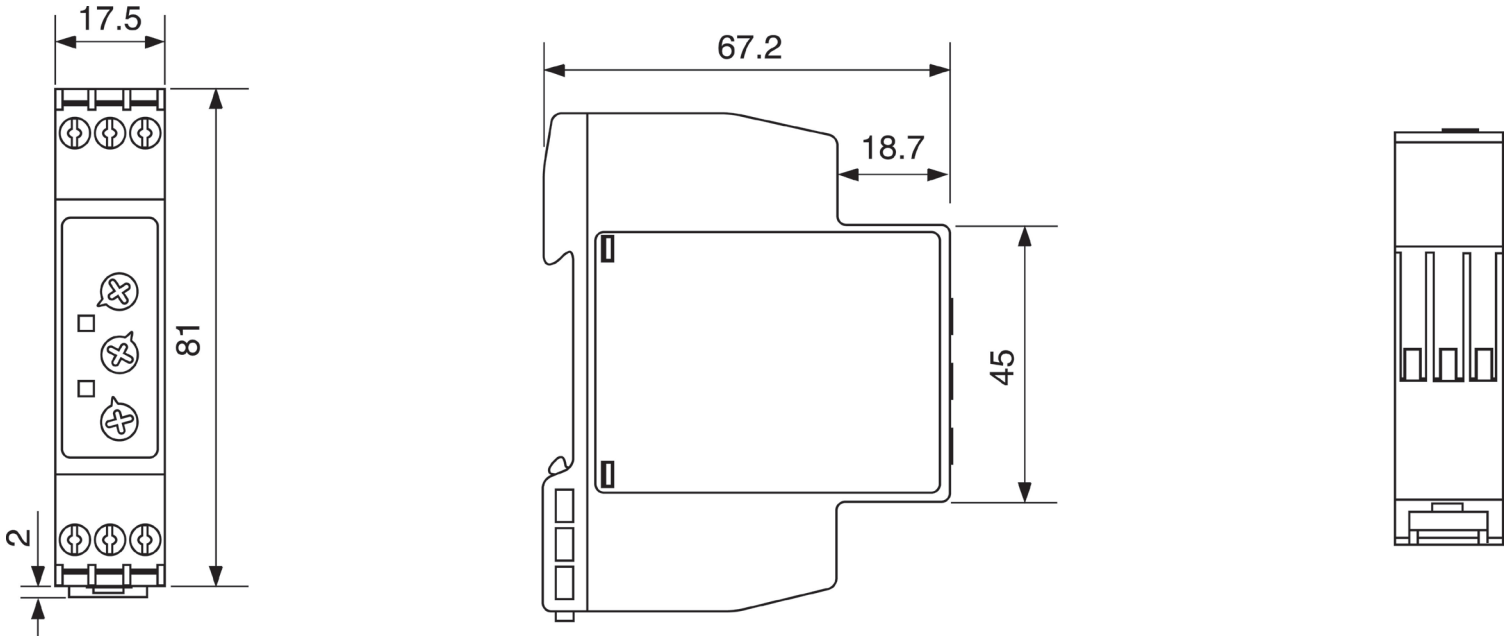

Published on 22 May 2026