100E26EJ400

Allen-Bradley 100E Contactor 26A 4Pole 24-60V DC Low Consumption Coil

CONTACTORS



Component type	Power contactor, AC switching
Range	100E
Model	N/A
Product status	Existing

The Allen-Bradley 100-E next-generation contactors are available in a range of sizes from 9 to 2650 A, reducing width and weight while maximising panel space. The universal electronic AC/DC coil makes selection easy and offers significant energy savings and direct connection to PLCs for contactors above 100 A.

ELECTRICAL	Number of normally open contacts as main contact	4
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-3, 400 V	26 A
	Rated operation power at AC-3, 400 V	3.8 kW
	Rated operation current Ie at AC-1, 400 V	45 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	AC/DC
	Rated control supply voltage Us at AC 50HZ	100-250 V
	Control supply voltage Us at AC 50HZ	24 V
	Rated control supply voltage Us at DC	100-250 V
	Control supply voltage Us at DC	20 V
	Number of auxiliary contacts as normally open contact	2
	Number of auxiliary contacts as normally closed contact	2
	Rated control supply voltage Us at AC 60HZ	100-250 V
	Control supply voltage Us at AC 60HZ	24 V
	Type of electrical connection of main circuit	Screw connection
CONSTRUCTION	IP rating	IP00
	Mounting method	Screw mounting
DIMENSIONS	Height	86 mm
	Width	46 mm
	Depth	86 mm
	Weight	0.48 kg


Published on 02 November 2026

100E26EJ400

Allen-Bradley 100E Contactor 26A 4Pole 24-60V DC Low Consumption Coil

CONTACTORS

DIMENSIONAL DIAGRAM

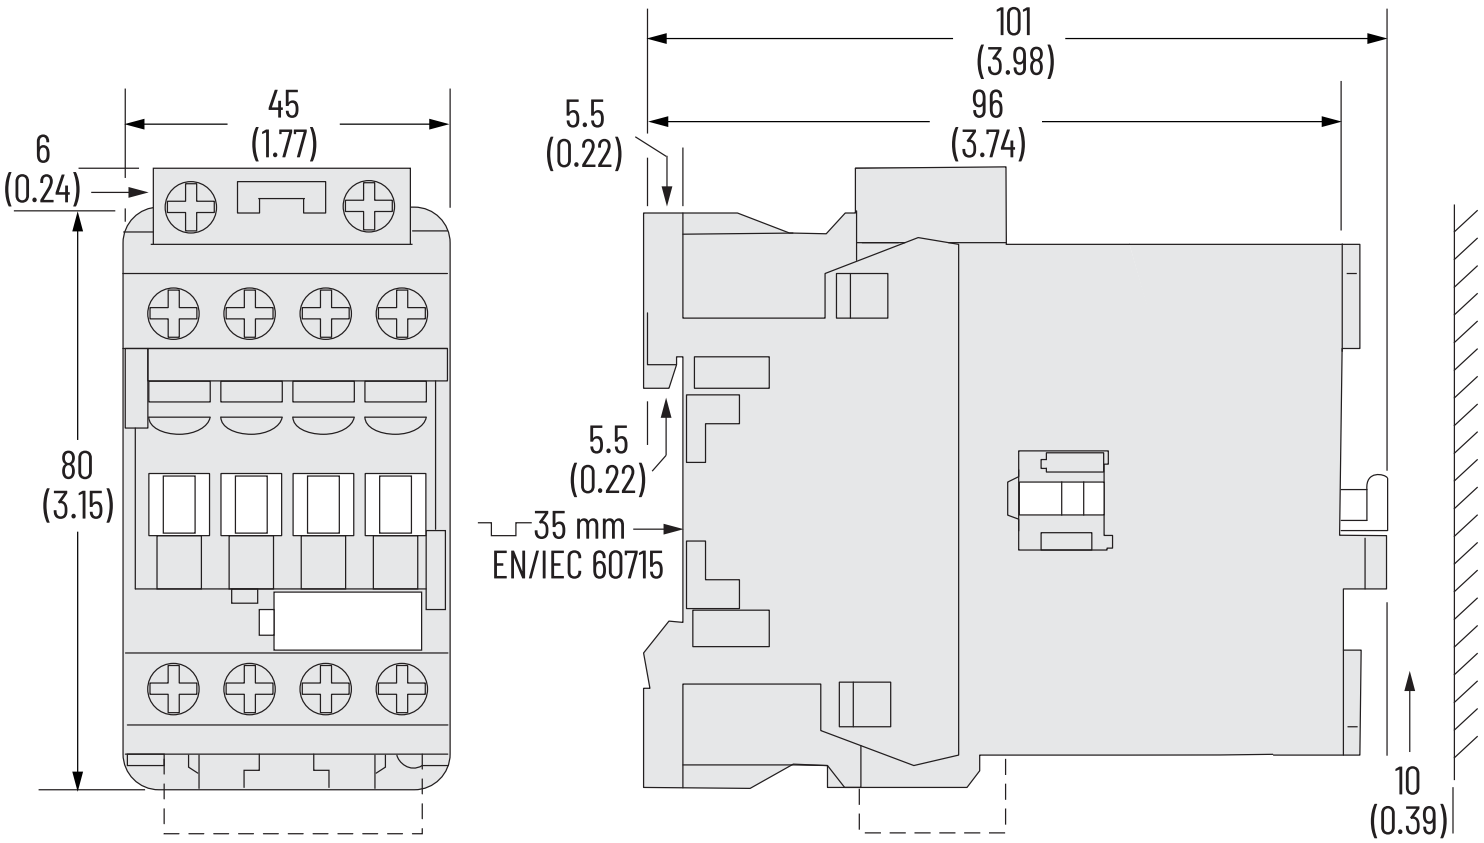

For contactors with QJ coils, add 20 mm (0.79 in.) to the depth.

Published on 02 November 2026