100SE30QJ22C

Allen-Bradley 100SE Safety Contactor 15kW 3P 24 DC Coil 2NO 2NC Low Power Auxiliary

CONTACTORS



Component type	Power contactor, AC switching
Range	100SE
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 100S-E safety contactors provide mechanically linked positively guided or mirror contact performance, required in the feedback circuits of modern safety applications.

ELECTRICAL	**Rated operation power at AC-3, 400 V**	15 kW
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	DC
	Rated control supply voltage Us at DC	24 V
	Rated operation current Ie at AC-3, 690 V	21 A
	Rated operation power at AC-3, 690 V	18.5 kW
	Power consumption, AC coil pickup	50 VA
	Power consumption, AC coil hold-in	2.2 VA
	Power consumption, DC coil pickup	50 W
	Power consumption, DC coil hold-in	2 W
	Type of electrical connection of main circuit	Screw connection
CONSTRUCTION	**IP rating**	IP20
	Mounting method	DIN-rail/screw
DIMENSIONS	**Height**	86 mm
	Width	45 mm
	Depth	119.5 mm
	Weight	0.48 kg


Published on 02 October 2026

100SE30QJ22C

Allen-Bradley 100SE Safety Contactor 15kW 3P 24 DC Coil 2NO 2NC Low Power Auxiliary

CONTACTORS

DIMENSIONAL DIAGRAM

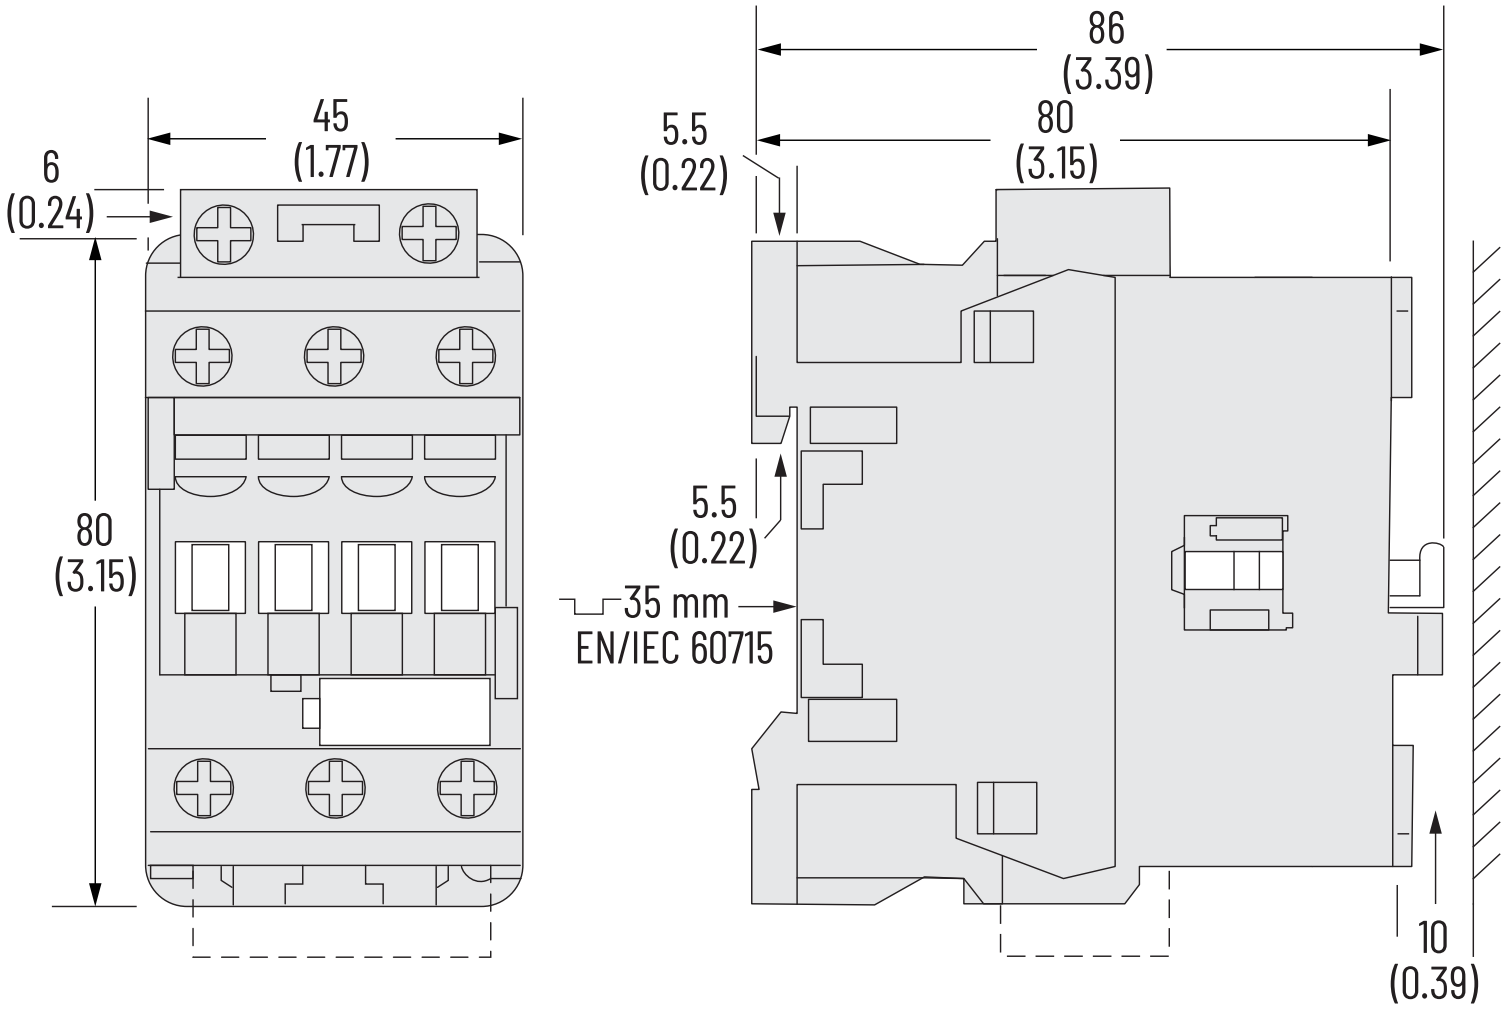

For contactors with QJ coils, add 20 mm (0.79 in.) to the depth.

Dimensions are shown in millimeters (inches).

Published on 02 October 2026