20G2AGC170JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP54 ND 170A 90kW or HD 140A 75kW Frame 6

LARGE DRIVES



Component type	Frequency converter =< 1 kV
Range	PowerFlex 755TS
Model	N/A
Product status	Existing

The Allen-Bradley PowerFlex 755TS Low Voltage AC drives are the next generation optimised range of drives in the 750 series. Fitted with TotalFORCE technology delivering high performance motor control, predictive analytics and real-time operational intelligence, increasing productivity and uptime while reducing energy and maintenance costs.

ELECTRICAL	Number of phases input	3
	Nominal input voltage	400 V
	Nominal output power AC	110 kW
	Nominal output current I2N	170 A
	kW rating, normal duty	90 kW
	kW rating, heavy duty	75 kW
CONSTRUCTION	Suitable for safety functions	Yes
	Frame size	6
	IP rating	IP54
DIMENSIONS	Height	665.5 mm
	Width	308 mm
	Depth	346.4 mm
ENVIRONMENT	Storage temperature	-40…70 °C


Published on 30 September 2026

20G2AGC170JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD 400V IP54 ND 170A 90kW or HD 140A 75kW Frame 6

LARGE DRIVES

DIMENSIONAL DIAGRAM

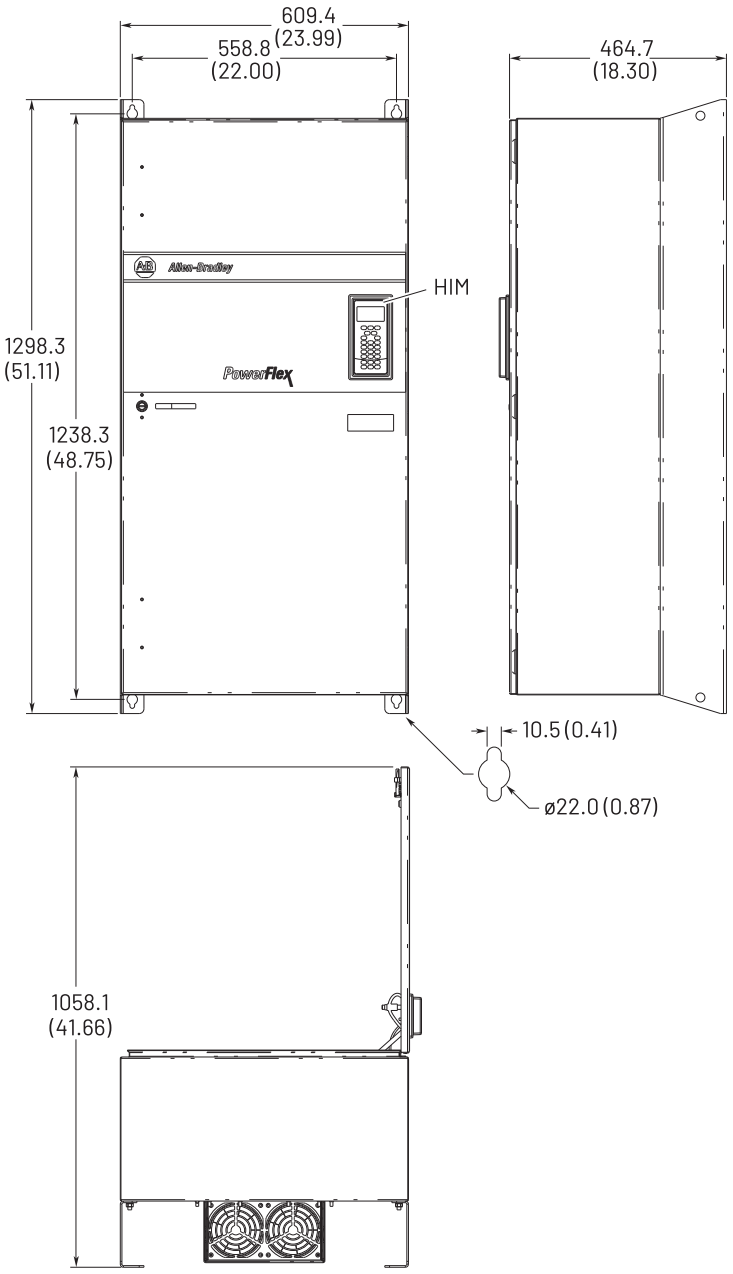

Dimensions are in millimeters and (inches).

Published on 30 September 2026