20GE1GC060JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD XT 400V IP54 ND 60A 30kW or HD 43A 22kW Frame 4

LARGE DRIVES



Component type	Frequency converter =< 1 kV
Range	PowerFlex 755TS
Model	N/A
Product status	Existing

The Allen-Bradley PowerFlex 755TS Low Voltage AC drives are the next generation optimised range of drives in the 750 series. Fitted with TotalFORCE technology delivering high performance motor control, predictive analytics and real-time operational intelligence, increasing productivity and uptime while reducing energy and maintenance costs.

ELECTRICAL	Number of phases input	3
	Nominal input voltage	400 V
	Nominal output power AC	22 kW
	Nominal output current I2N	60 A
	kW rating, normal duty	30 kW
	kW rating, heavy duty	22 kW
CONSTRUCTION	Suitable for safety functions	Yes
	Frame size	4
	IP rating	IP54
DIMENSIONS	Height	474 mm
	Width	222 mm
	Depth	212 mm
ENVIRONMENT	Storage temperature	-40…70 °C


Published on 13 August 2026

20GE1GC060JA0NNNNN

Allen-Bradley PowerFlex 755TS VSD XT 400V IP54 ND 60A 30kW or HD 43A 22kW Frame 4

LARGE DRIVES

DIMENSIONAL DIAGRAM

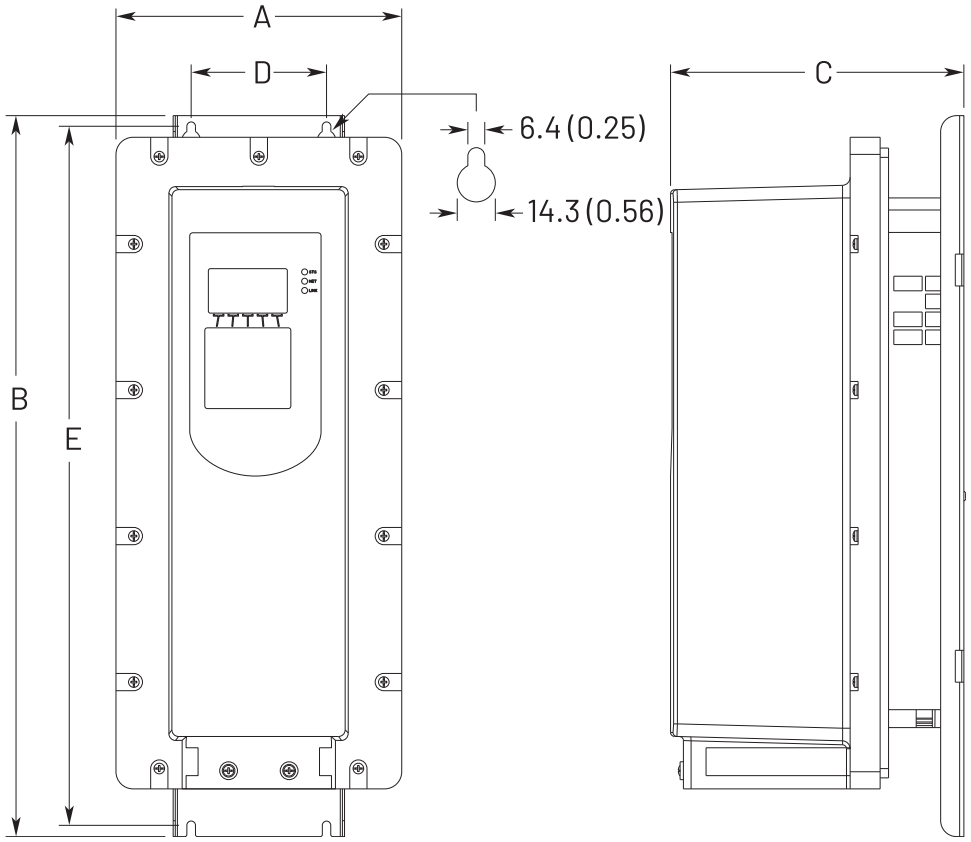

Dimensions are in millimeters and (inches).
Weights are in kilograms and (pounds).

Frame	A	B	C	D	E	Weight, kg (lb)
2	215.3 (8.48)	543.2 (21.39)	222.2 (8.75)	100.0 (3.94)	528.2 (20.80)	7.8 (17.2)
3	268.0 (10.55)	551.0 (21.69)	220.1 (8.67)	158.0 (6.22)	533.0 (20.98)	11.8 (26.1)
4	300.0 (11.81)	571.0 (22.48)	220.1 (8.67)	194.0 (7.64)	553.0 (21.77)	13.6 (30.0)
5	348.0 (13.70)	647.0 (25.47)	220.1 (8.67)	238.0 (9.37)	629.0 (24.76)	20.4 (45.0)

Published on 13 August 2026