
# CA8901110VAC

**S+S CA8 Contactor Mini 4kW 3Pole 110VAC Coil 1NC Contact Auxiliary**

CONTACTORS

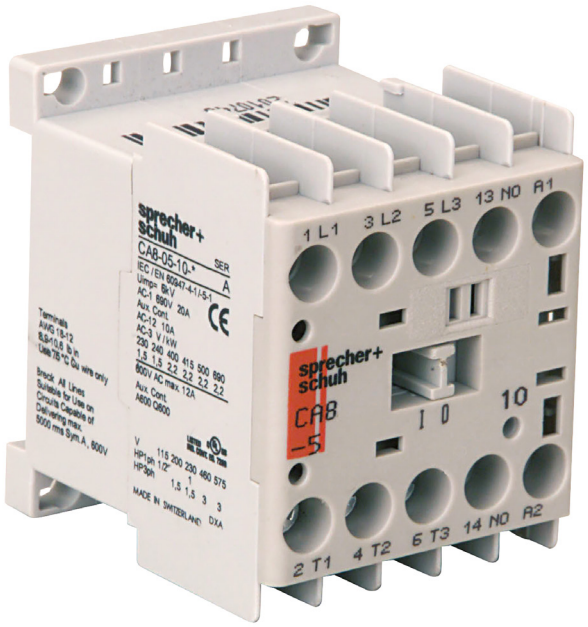


| | |
|---|---|
| **Component type** | Power contactor, AC switching |
| **Range** | CA8 Mini |
| **Model** | N/A |
| **Product status** | Existing |

The Sprecher + Schuh CA8 miniature contactors and starters are a compact and reliable method of controlling motors of 5.5kW or less. Ideal for applications where space is limited. Components are DIN-rail mountable and clearly marked and dispatched in the open position ready for assembly. Fittings are also included on the base mounting for quick installation and modification.

| | | |
|---|---|---|
| **ELECTRICAL** | Number of normally open contacts as main contact | 3 |
| | Number of normally closed contacts as main contact | 0 |
| | Rated operation current Ie at AC-3, 400 V | 8.5 A |
| | Rated operation power at AC-3, 400 V | 4 kW |
| | Rated operation current Ie at AC-1, 400 V | 20 A |
| | Max. rated operation voltage Ue AC | 690 V |
| | Voltage type for actuating | AC |
| | Control supply voltage Us at AC 50HZ | 110 V |
| | Number of auxiliary contacts as normally open contact | 0 |
| | Number of auxiliary contacts as normally closed contact | 1 |
| | Rated operation current Ie at AC-3, 690 V | 4.9 A |
| | Rated operation power at AC-3, 690 V | 4 kW |
| | Rated operation power at AC-4, 400 V | 1.1 kW |
| | Control supply voltage Us at AC 60HZ | 120 V |
| | Power consumption, AC coil pickup | 35 VA |
| | Power consumption, AC coil hold-in | 5 VA |
| | Type of electrical connection of main circuit | Screw connection |
| | Rated operation current Ie at AC-4, 400 V | 3.6 A |
| **CONSTRUCTION** | IP rating | IP20 |
| | Mounting method | Screw mounting |
| **DIMENSIONS** | Height | 56 mm |
| | Width | 44.9 mm |
| | Depth | 53 mm |
| | Weight | 0.16 kg |



Published on 29 October 2026


# CA8901110VAC

**S+S CA8 Contactor Mini 4kW 3Pole 110VAC Coil 1NC Contact Auxiliary**

CONTACTORS

## DIMENSIONAL DIAGRAM

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

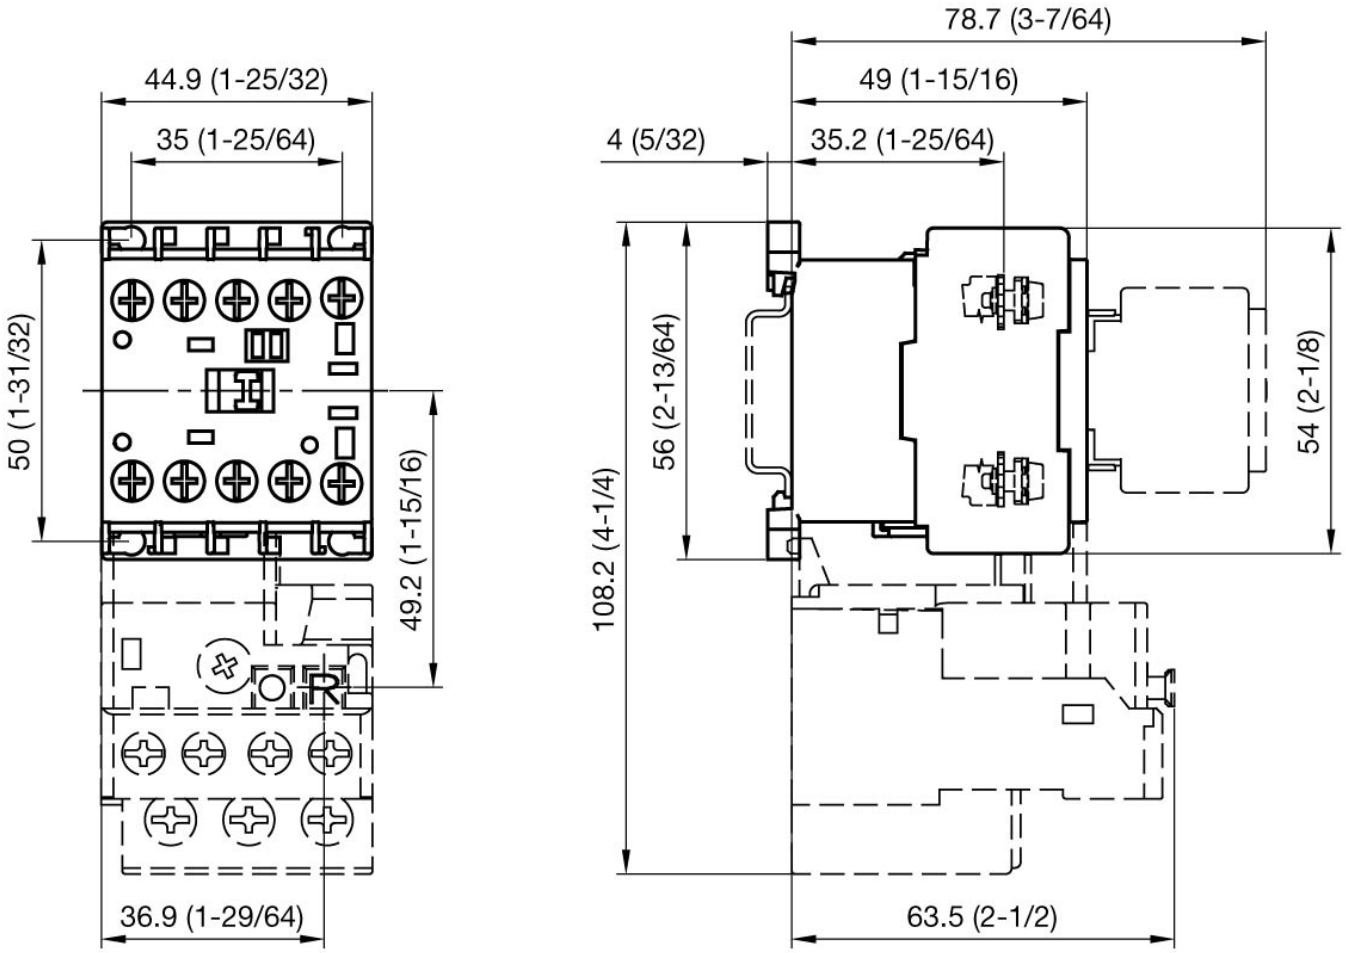


## REVERSING CONTACTORS & ACCESSORIES

| Contactor with... | | Dim. [mm] |
|---|---|---|
| reversing with mechanical interlock | | 89.8 |
| with aux. contact block | | 78.7 |
| with timer | on contactor | 81.7 |
| | at side of contactor | 66.9 |
| with protection element | | |
| with nameplate | | 51 |



Published on 29 October 2026

# CA8901110VAC

**S+S CA8 Contactor Mini 4kW 3Pole 110VAC Coil 1NC Contact Auxiliary**

CONTACTORS

## RELATED PRODUCTS

### ACCESSORY



**Item No:** CA8P02
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 2NC Contact



**Item No:** CA8P04
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 4NC Contacts



**Item No:** CA8P11
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 1NO Contact and 1NC Contact



**Item No:** CA8P13
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 1NO Contact and 3NC Contact



**Item No:** CA8P20
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 2NO Contacts



**Item No:** CA8P22
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 2NO Contacts and 2NC Contact



**Item No:** CA8P31
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 3NO Contacts and 1NC Contact



**Item No:** CA8P40
**Required:** Yes
**Description:** S+S CA8 Auxiliary Contact with 4NO Contacts

**Item No:** CA8W453
**Required:** Yes
**Description:** S+S CA8 Buscomb 3Pole for CA8 3 Way

**Item No:** CA8W454
**Required:** Yes
**Description:** S+S CA8 Buscomb 3Pole for CA8 4 Way

**Item No:** CA8WT
**Required:** Yes
**Description:** S+S CA8 Feeder Terminals



**Item No:** CAUT8PW
**Required:** Yes
**Description:** S+S CA7 Reversing Starter Power Connection Links for CA8 5 and 12A



**Item No:** CM8
**Required:** Yes
**Description:** S+S CA9 Mechanical Interlock



**Item No:** CRC850
**Required:** Yes
**Description:** S+S CA7 Coil Suppressor RC Module 24 to 48VAC



**Item No:** CRV8136
**Required:** Yes
**Description:** S+S CA7 Coil Suppressor Varistor Module 56 to 136VAC and 78 to 178VDC



**Item No:** CRV8277
**Required:** Yes
**Description:** S+S CA7 Coil Suppressor Varistor Module 137 to 277VAC and 181 to 350VDC



**Item No:** CS8P02E
**Required:** Yes
**Description:** S+S CS8 Auxiliary Contact with 2NC Contact



**Item No:** CS8P04E
**Required:** Yes
**Description:** S+S CS8 Auxiliary Contact with 4NC Contacts

# CA8901110VAC

**S+S CA8 Contactor Mini 4kW 3Pole 110VAC Coil 1NC Contact Auxiliary**

CONTACTORS

## RELATED PRODUCTS

### ACCESSORY



**Item No:** CS8P11E

**Required:** Yes

**Description:** S+S CS8 Auxiliary Contact with 1NO Contact and 1NC Contact



**Item No:** CS8P13E

**Required:** Yes

**Description:** S+S CS8 Auxiliary Contact with 1NO Contact and 3NC Contact



**Item No:** CS8P22Z

**Required:** Yes

**Description:** S+S CS8 Auxiliary Contact with 2NO Contacts and 2NC Contact



**Item No:** CS8P31Z

**Required:** Yes


**Description:** S+S CS8 Auxiliary Contact with 3NO Contacts and 1NC Contact



**Item No:** CS8P40E

**Required:** Yes

**Description:** S+S CS8 Auxiliary Contact with 4NO Contacts



**Item No:** KT725SPEK12

**Required:** Yes

**Description:** S+S KT7 Connection Link KT7255 to CA8 Compact Starter





Published on 29 October 2026