

100C97G00

Allen-Bradley 100C Contactor 55kW 3Pole 400 to 415VAC Coil



Component type	Power contactor, AC switching
Range	100C
Model	N/A
Product status	Existing

The Allen-Bradley 100-C contactor line offers compact, high-performance design in 9 to 97 A contactors. These energy efficient contactors are designed to control motors and other loads. Straightforward wiring and installation process ensure quick and easy setup, reducing downtime and increasing productivity.

ELECTRICAL

Number of normally open contacts as main contact	3
Number of normally closed contacts as main contact	0
Rated operation current Ie at AC-3, 400 V	97 A
Rated operation power at AC-3, 400 V	55 kW
Rated operation current Ie at AC-1, 400 V	130 A
Max. rated operation voltage Ue AC	690 V
Voltage type for actuating	AC
Rated control supply voltage Us at AC 50HZ	400-415 V
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as normally closed contact	0
Rated operation current Ie at AC-3, 690 V	57 A
Rated operation power at AC-3, 690 V	55 kW
Power consumption, AC coil pickup	400 VA
Power consumption, AC coil hold-in	24 VA
Type of electrical connection of main circuit	Screw connection

CONSTRUCTION

IP rating	IP20
Mounting method	Screw mounting

DIMENSIONS


Height	122 mm
Width	72 mm
Depth	125.5 mm
Weight	1.45 kg

100C97G00

Allen-Bradley 100C Contactor 55kW 3Pole 400 to 415VAC Coil



DIMENSIONAL DIAGRAM

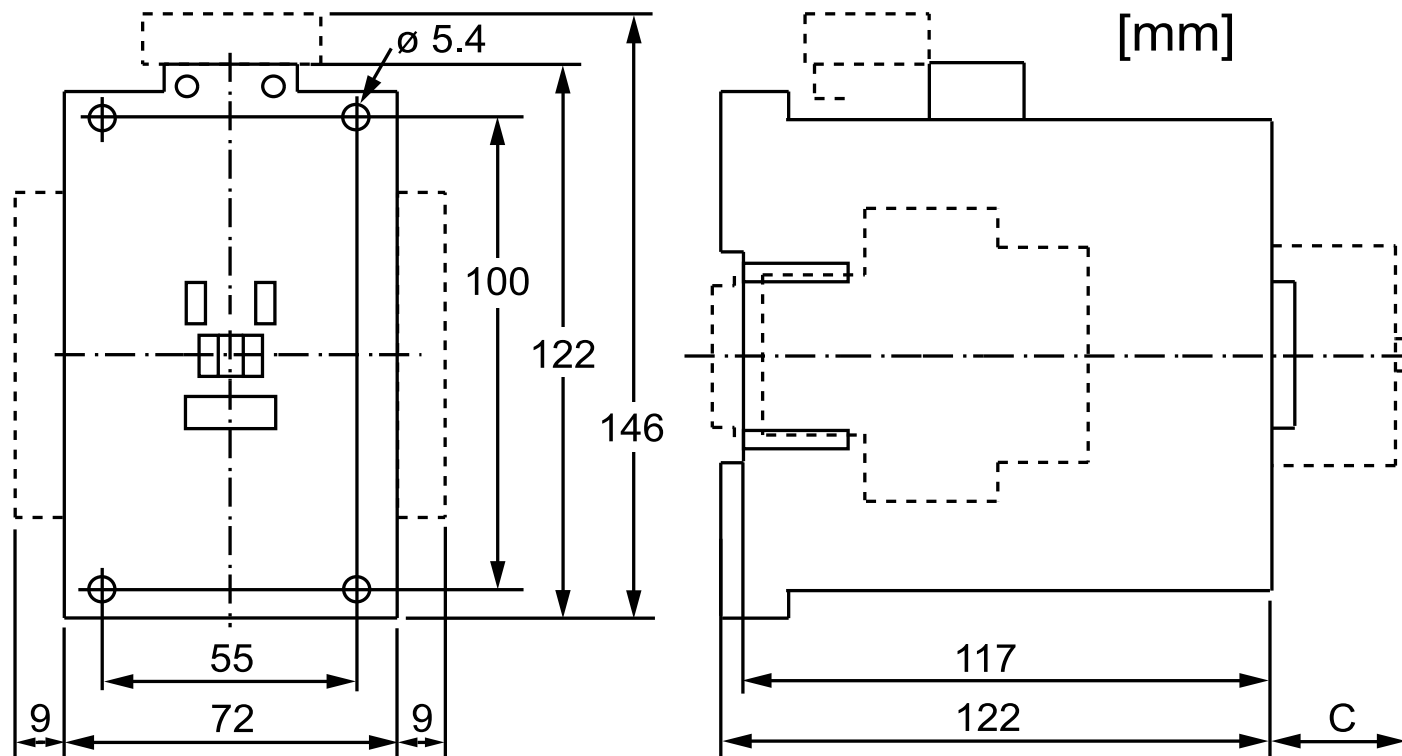

C [mm]

