
100SE265ED12C

Allen-Bradley 100SE Safety Contactor 132kW 3Pole 100 to 250VAC and VDC Elec Coil 1NO 1NC Contact Aux

SAFETY CONTACTORS

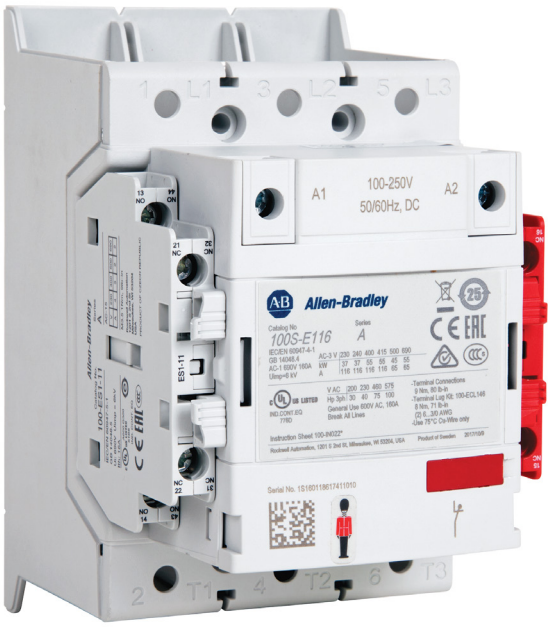

Component type	Power contactor, AC switching
Range	100SE
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 100S-E safety contactors provide mechanically linked positively guided or mirror contact performance, required in the feedback circuits of modern safety applications.

ELECTRICAL

Number of normally open contacts as main contact	3
Number of normally closed contacts as main contact	0
Rated operation current Ie at AC-3, 400 V	265 A
Rated operation power at AC-3, 400 V	132 kW
Rated operation current Ie at AC-1, 400 V	400 A
Max. rated operation voltage Ue AC	1000 V
Voltage type for actuating	AC/DC
Rated control supply voltage Us at AC 50HZ	100-250 V
Rated control supply voltage Us at DC	100-250 V
Number of auxiliary contacts as normally open contact	1
Number of auxiliary contacts as normally closed contact	2
Rated operation current Ie at AC-3, 690 V	250 A
Rated operation power at AC-3, 690 V	200 kW
Rated operation current Ie at AC-3, 1000 V	113 A
Rated operation power at AC-3, 1000 V	160 kW
Rated operation power at AC-4, 400 V	110 kW
Rated control supply voltage Us at AC 60HZ	100-250 V
Power consumption, AC coil pickup	385 VA
Power consumption, AC coil hold-in	17.5 VA
Power consumption, DC coil pickup	410 W
Power consumption, DC coil hold-in	4.5 W
Type of electrical connection of main circuit	Bolt connection
Rated operation current Ie at AC-4, 400 V	195 A

CONSTRUCTION

IP rating	IP00

Published on 13 October 2026

100SE265ED12C


Allen-Bradley 100SE Safety Contactor 132kW 3Pole 100 to 250VAC and VDC Elec Coil 1NO 1NC Contact Aux

SAFETY CONTACTORS

NHP Allen-Bradley

CONSTRUCTION	**Mounting method**	Screw mounting
DIMENSIONS	**Height**	225 mm
	Width	140 mm
	Depth	195.5 mm
	Weight	4.64 kg

DIMENSIONAL DIAGRAM

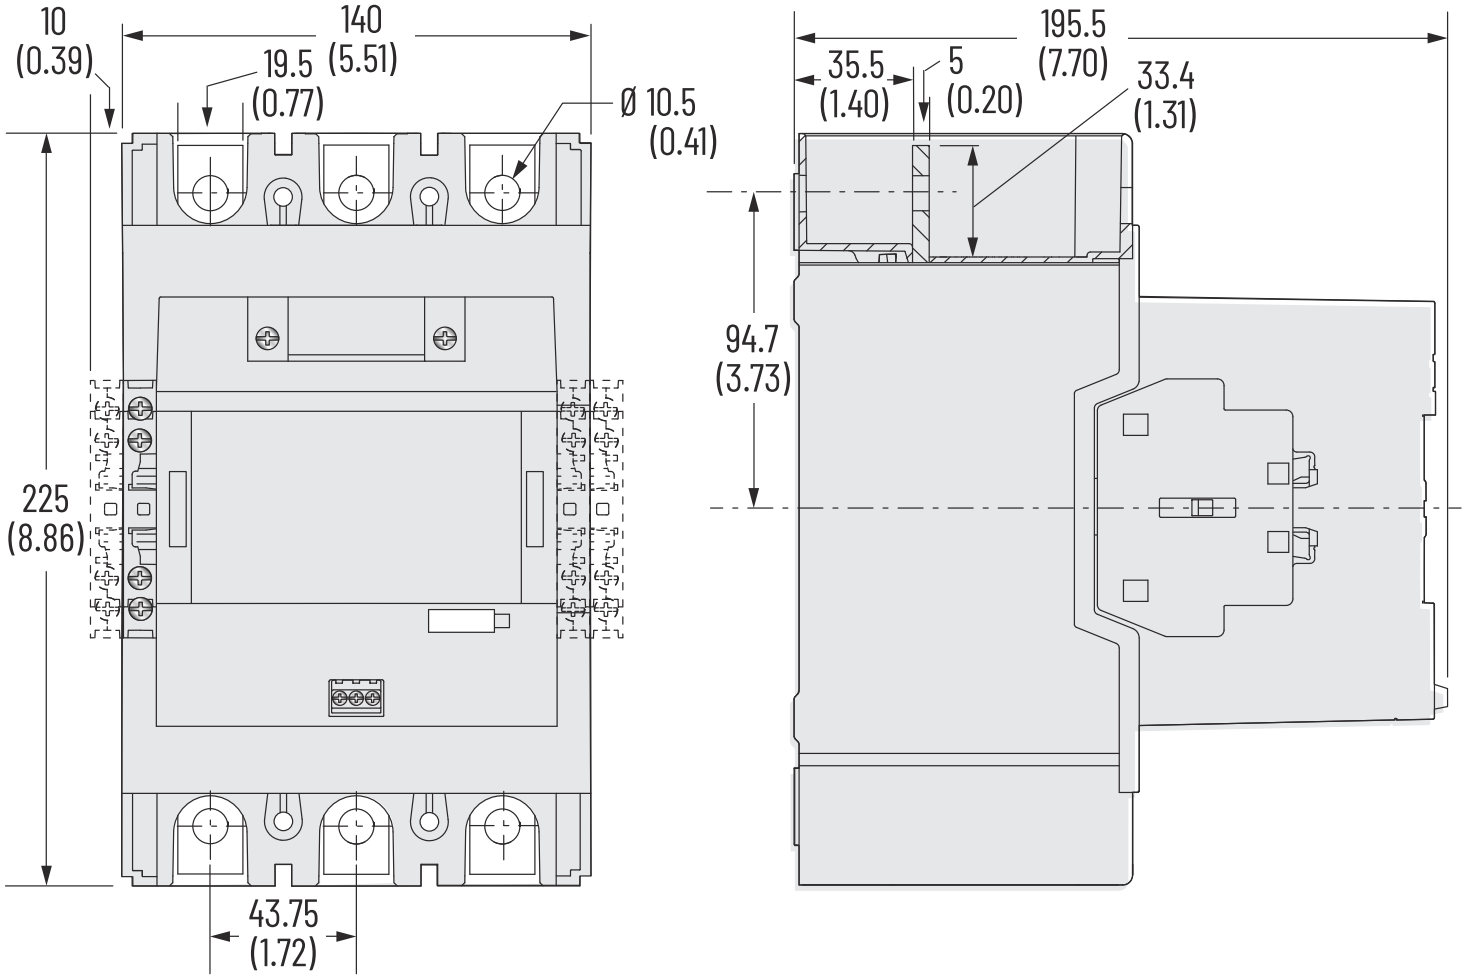

Dimensions are shown in millimeters (inches).

Published on 13 October 2026