
100SE400EJ12C

Allen-Bradley 100SE Safety Contactor 220kW 3Pole 24 to 60VDC Elec Coil 1NO 1NC Contact Auxiliary

SAFETY CONTACTORS

NHP Allen-Bradley

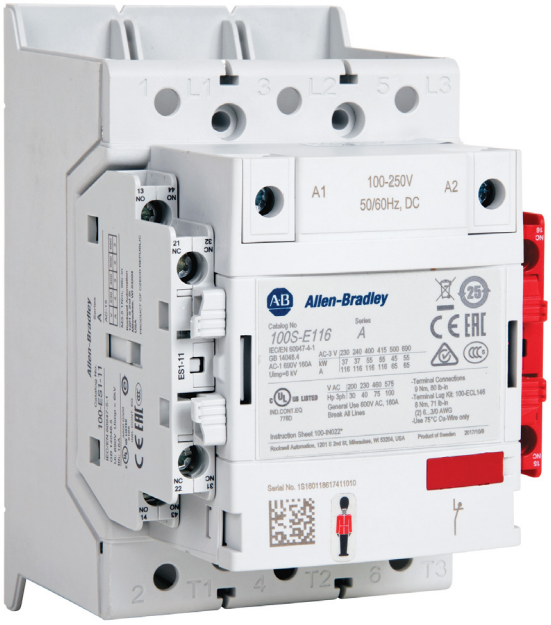

Component type	Power contactor, AC switching
Range	100SE
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 100S-E safety contactors provide mechanically linked positively guided or mirror contact performance, required in the feedback circuits of modern safety applications.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-3, 400 V	400 A
	Rated operation power at AC-3, 400 V	220 kW
	Rated operation current Ie at AC-1, 400 V	600 A
	Max. rated operation voltage Ue AC	1000 V
	Voltage type for actuating	DC
	Rated control supply voltage Us at DC	24-60 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	2
	Rated operation current Ie at AC-3, 690 V	350 A
	Rated operation power at AC-3, 690 V	315 kW
	Rated operation current Ie at AC-3, 1000 V	155 A
	Rated operation power at AC-3, 1000 V	220 kW
	Rated operation power at AC-4, 400 V	160 kW
	Power consumption, DC coil pickup	900 W
	Power consumption, DC coil hold-in	5 W
	Type of electrical connection of main circuit	Bolt connection
	Rated operation current Ie at AC-4, 400 V	307 A
CONSTRUCTION	IP rating	IP00
	Mounting method	Screw mounting
DIMENSIONS	Height	268 mm
	Width	186 mm

Published on 02 October 2026


100SE400EJ12C

Allen-Bradley 100SE Safety Contactor 220kW 3Pole 24 to 60VDC Elec Coil 1NO 1NC Contact Auxiliary

SAFETY CONTACTORS

DIMENSIONS		
	Depth	216 mm
	Weight	12 kg

DIMENSIONAL DIAGRAM

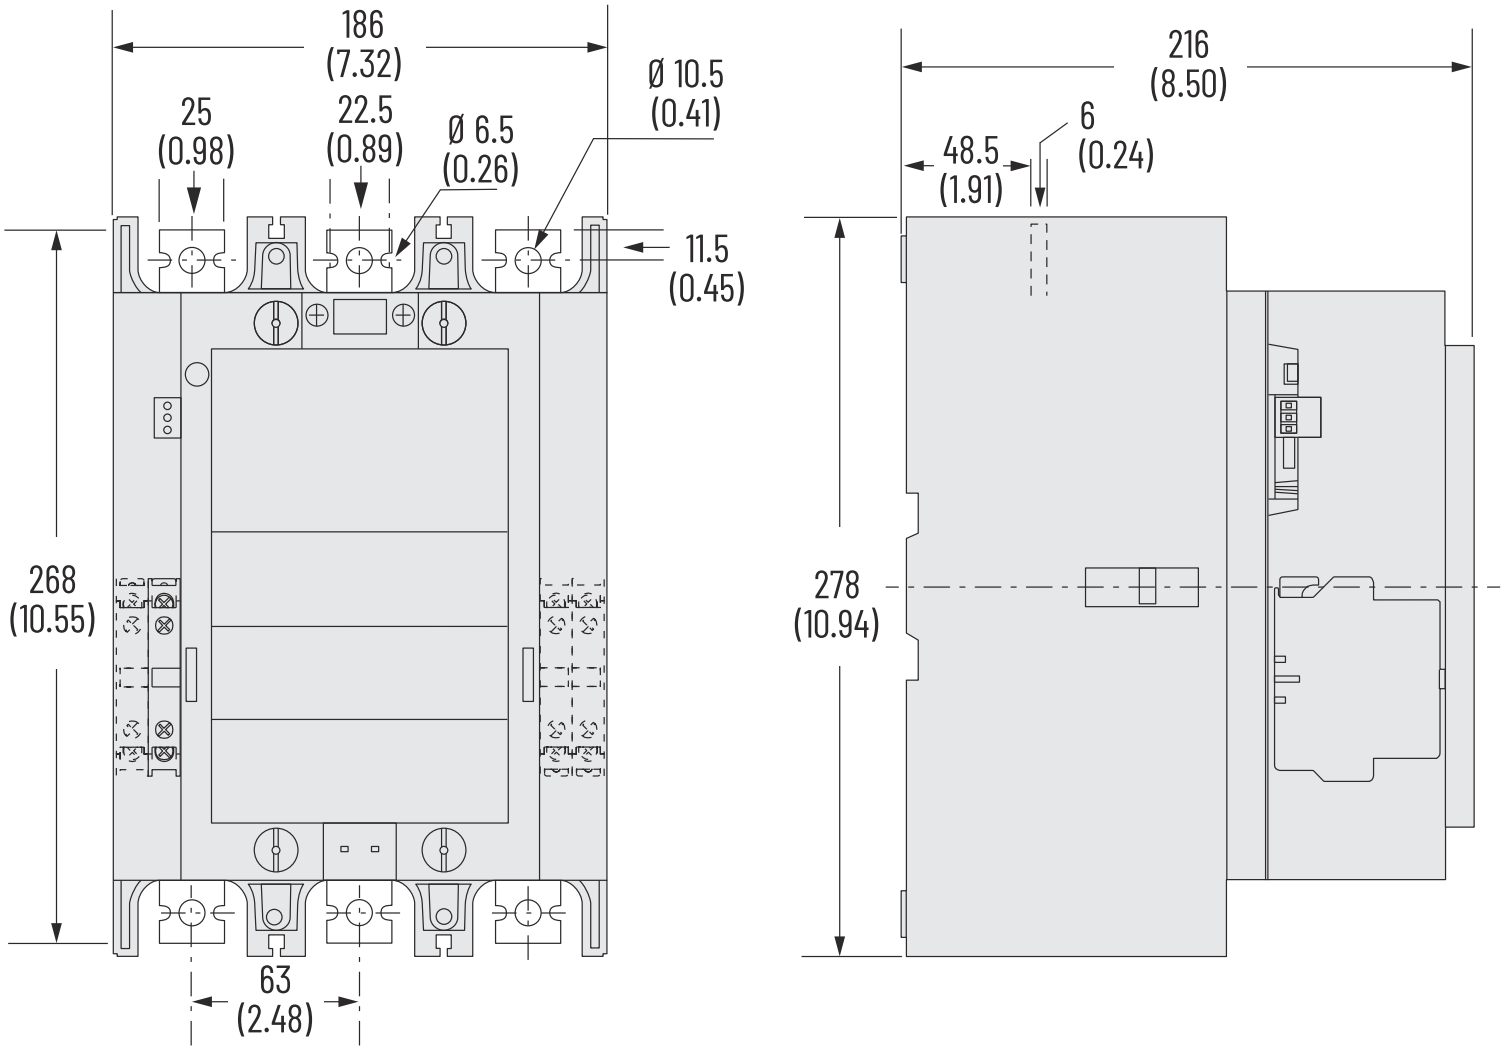

Dimensions are shown in millimeters (inches).

Published on 02 October 2026