140GK15S3D40

Allen-Bradley 140G MCCB K Frame 150kA 3P 400A Moulded Case Switch Isolator



Component type	Power switching circuit breaker
Range	Moulded Case Circuit Breaker
Model	N/A
Product status	Existing

The Allen Bradley motor protection circuit breakers offer a reliable solution with both short-circuit and overload protection for individual motor loads with high interrupt ratings for 2 and 3 pole devices. Ideal for motor starting and motor protection applications. Connecting modules are available and have been combination short-circuit tested with the Allen Bradley 100-E contactors.

ELECTRICAL	Rated current In	400 A
	Number of poles	3
	Max. rated operation voltage Ue AC	690 V
	Rated ultimate short-circuit breaking capacity Icu at 415 V, 50 Hz	200 kA
	Type of protection trip unit	Non auto-switch
	Frame size rating	400 A
	Rated frequency	50-60 Hz
	Rated insulation voltage Ui	1000 V
	Suitable for isolation	Yes
	Rated short circuit breaking capacity, Icu 690V AC	100 kA
	Rated short circuit breaking capacity, Ics 690V AC	100 kA
	Rated impulse withstand voltage Uimp	8 kV
	Reverse connection of supply possible	Yes
	Electrical life at Un, In (service cycles)	7000 cycles
	Short time withstand current Icw, 1 sec	5 kA
	Power loss	49.5 W
CONSTRUCTION	Air circuit breaker (withdrawable)	No
MECHANICAL	Mechanical life (service cycles)	20000 cycles
DIMENSIONS	Height	205 mm
	Width	139.5 mm
	Pole connection pitch	46.5 mm
	Built-in depth	103.5 mm
	Depth (toggle included)	139 mm
	Weight	3.25 kg

Published on 07 September 2026

140GK15S3D40

Allen-Bradley 140G MCCB K Frame 150kA 3P 400A Moulded Case Switch Isolator


ENVIRONMENT	Rated surrounding temperature without derating	40 °C
	Maximum operating temperature	75 °C
	Storage temperature	-40…80 °C
	Max. altitude before derating	2000 m


Published on 07 September 2026

140GK15S3D40

Allen-Bradley 140G MCCB K Frame 150kA 3P 400A Moulded Case Switch Isolator

DIMENSIONAL DIAGRAM

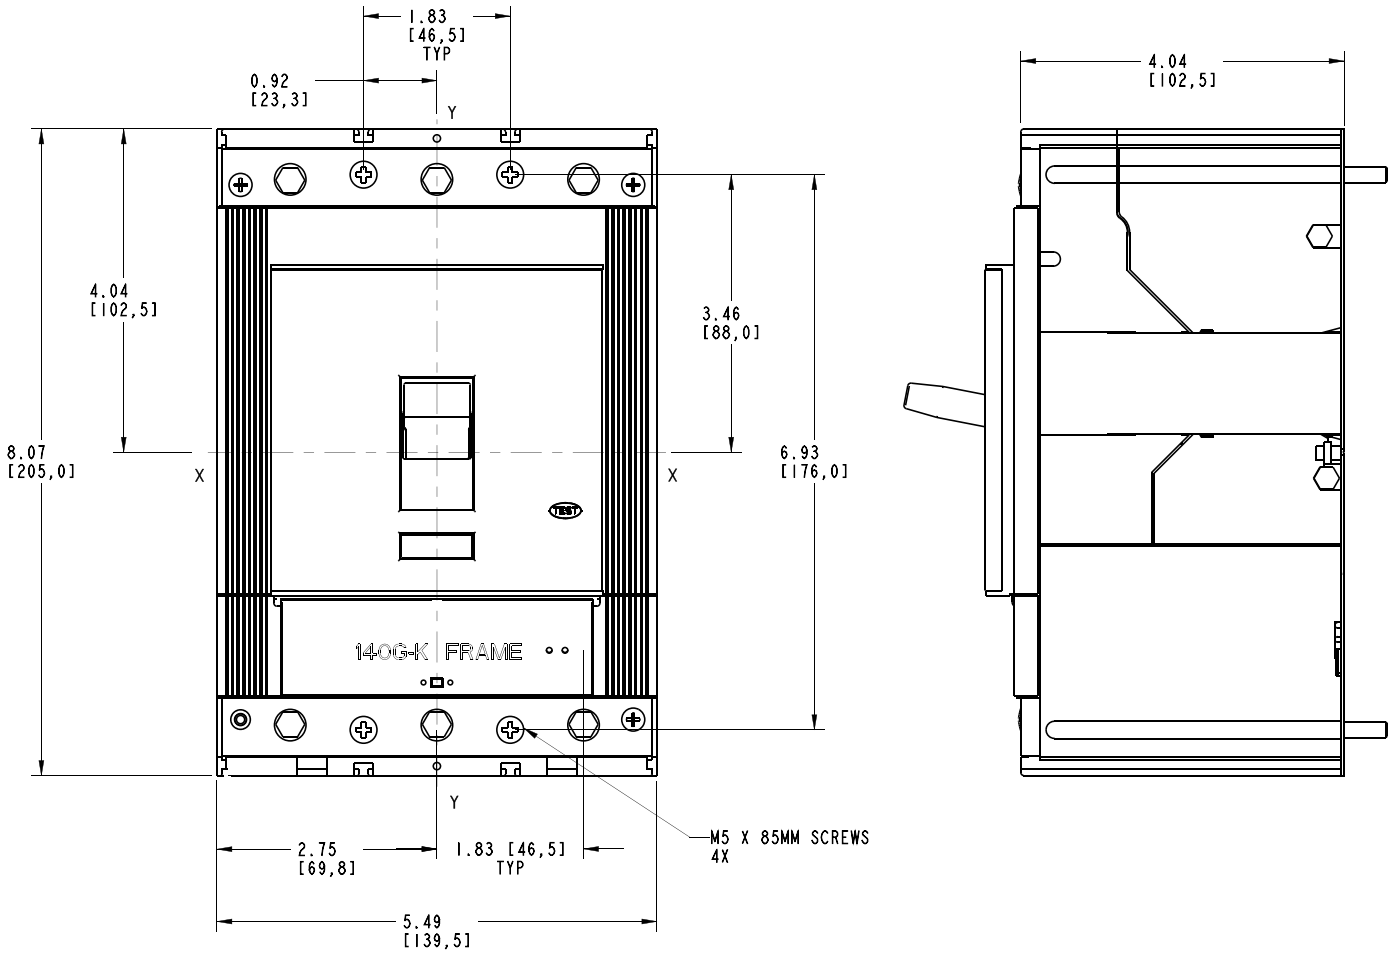

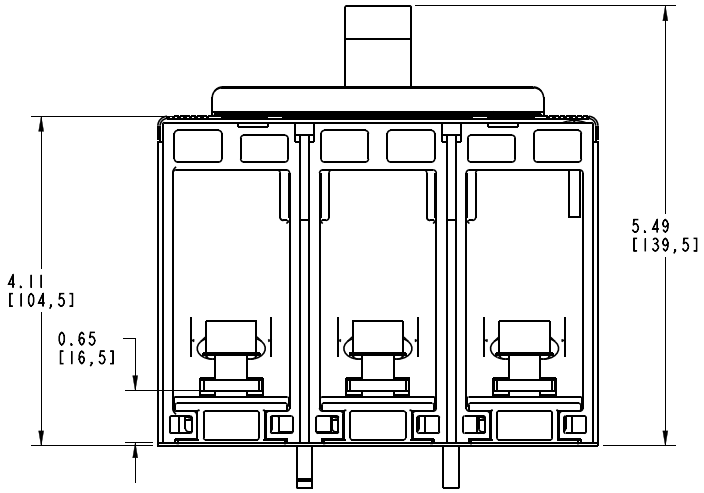

Published on 07 September 2026