140GM6F4D63

Allen-Bradley 140G MCCB M Frame 70kA 4P 630A Adjustable Thermal Magnetic



Component type	Power switching circuit breaker
Range	Moulded Case Circuit Breaker
Model	N/A
Product status	Existing

The Allen Bradley motor protection circuit breakers offer a reliable solution with both short-circuit and overload protection for individual motor loads with high interrupt ratings for 2 and 3 pole devices. Ideal for motor starting and motor protection applications. Connecting modules are available and have been combination short-circuit tested with the Allen Bradley 100-E contactors.

ELECTRICAL	Rated current In	630 A
	Number of poles	4
	Max. rated operation voltage Ue AC	690 V
	Rated ultimate short-circuit breaking capacity Icu at 415 V, 50 Hz	70 kA
	Type of protection trip unit	Thermal/magnetic release
	Trip curve	Adj. thermal, adj. magnetic
	Frame size rating	800 A
	Long time overload protection adjustment range	441-630 A
	Instantaneous protection adjustment range	3150-6300 A
	Rated frequency	50-60 Hz
	Rated insulation voltage Ui	1000 V
	Suitable for isolation	Yes
	Rated short circuit breaking capacity, Icu 690V AC	25 kA
	Rated short circuit breaking capacity, Ics 690V AC	18.7 kA
	Rated impulse withstand voltage Uimp	8 kV
	Reverse connection of supply possible	Yes
	Electrical life at Un, In (service cycles)	7000 cycles
	Short time withstand current Icw, 1 sec	10 kA
	Power loss	122.4 W
MECHANICAL	Mechanical life (service cycles)	20000 cycles
DIMENSIONS	Height	268 mm
	Width	280 mm
	Pole connection pitch	70 mm
	Built-in depth	103.5 mm

140GM6F4D63


Allen-Bradley 140G MCCB M Frame 70kA 4P 630A Adjustable Thermal Magnetic

DIMENSIONS	Depth (toggle included)	159 mm
	Weight	15.1 kg
ENVIRONMENT	Rated surrounding temperature without derating	40 °C
	Maximum operating temperature	75 °C
	Storage temperature	-40…80 °C
	Max. altitude before derating	2000 m

140GM6F4D63

Allen-Bradley 140G MCCB M Frame 70kA 4P 630A Adjustable Thermal Magnetic


DIMENSIONAL DIAGRAM

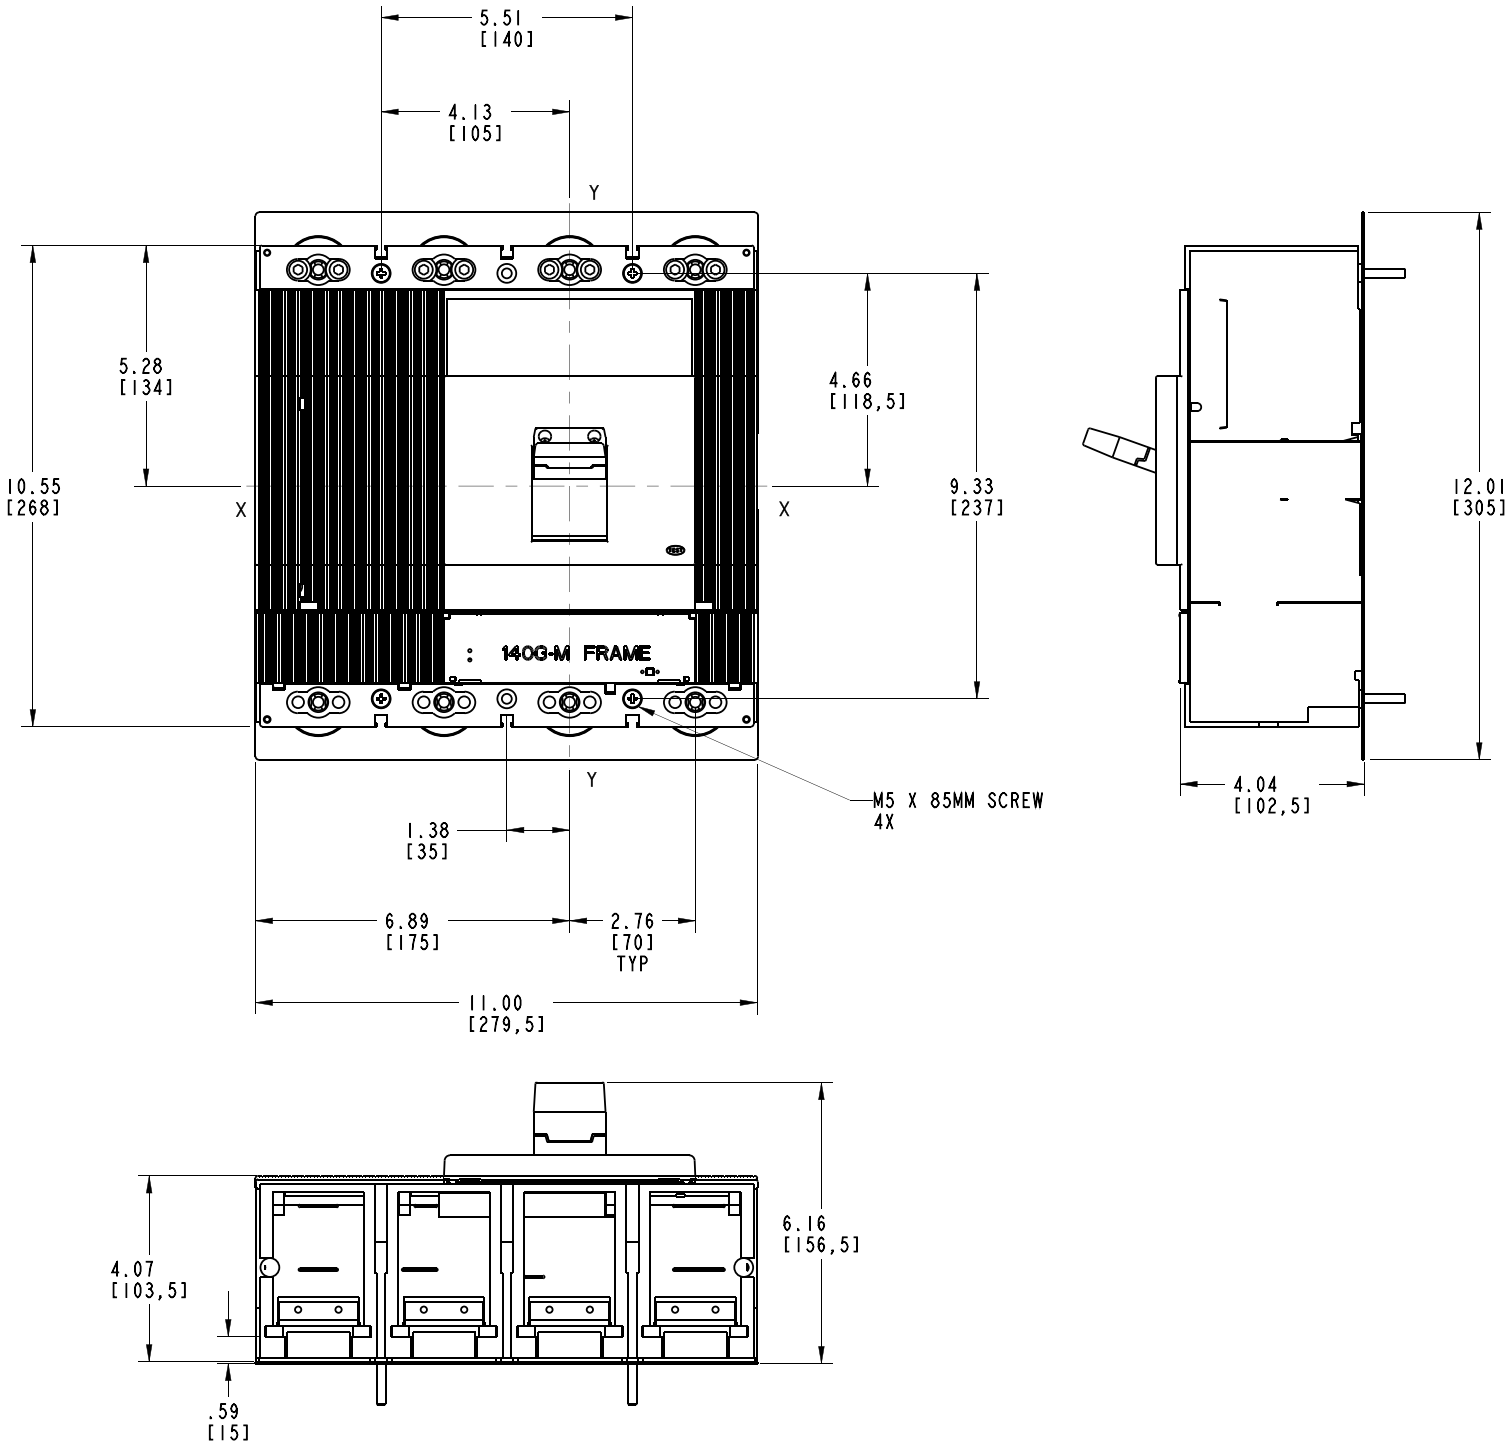



Published on 07 September 2026

140GM6F4D63


Allen-Bradley 140G MCCB M Frame 70kA 4P 630A Adjustable Thermal Magnetic

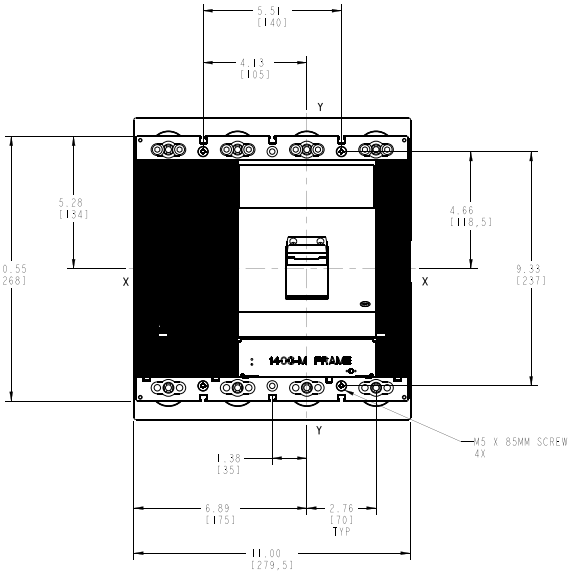




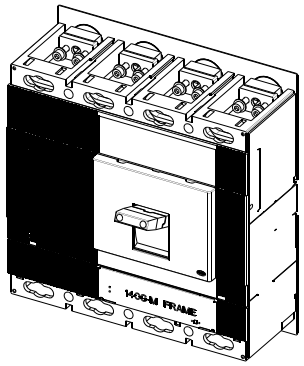

ISOMETRIC VIEW

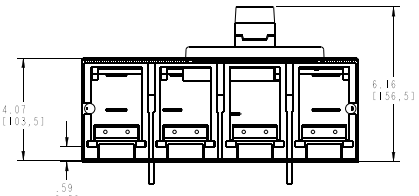

SCALE 0.5:1

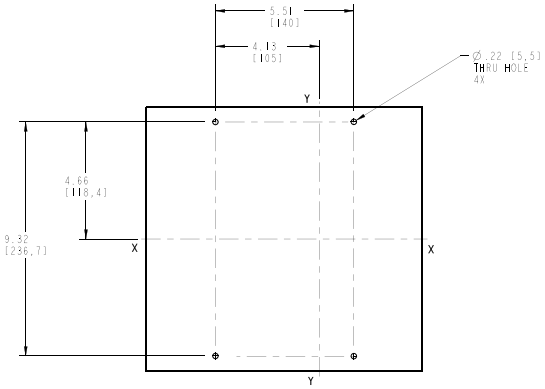

DRILLING FOR FIXING CIRCUIT BREAKER

SCALE 0.5:1

Published on 07 September 2026