1715IB16D

Allen-Bradley 1715 Redundant I/O 16-Point Digital Input Module 18 32V DC

IN CABINET DISTRIBUTED IO



Component type	Fieldbus, decentr. periphery - analogue/digital I/O module
Range	Redundant IO
Model	N/A
Product status	Existing

ELECTRICAL	Type of voltage (input voltage)	DC
	Type of output voltage	DC
	Supply voltage DC	24-24 V
	Type of digital input	Sinking
CONSTRUCTION	Suitable for safety functions	No
	Number of digital inputs	16
DIMENSIONS	Width	42 mm
	Height	166 mm
	Depth	118 mm
ENVIRONMENT	Operating temperature	-25…60 °C
	Storage temperature	-40…85 °C
	Max. ambient humidity (non-condensing)	95 %

Published on 30 October 2026


1715IB16D


Allen-Bradley 1715 Redundant I/O 16-Point Digital Input Module 18 32V DC

IN CABINET DISTRIBUTED IO

Allen-Bradley

DIMENSIONAL DIAGRAM

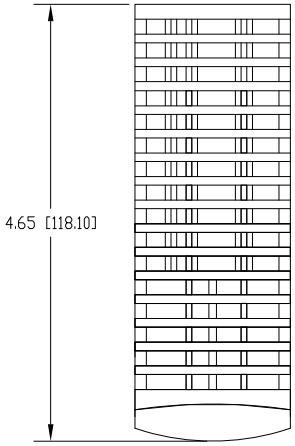

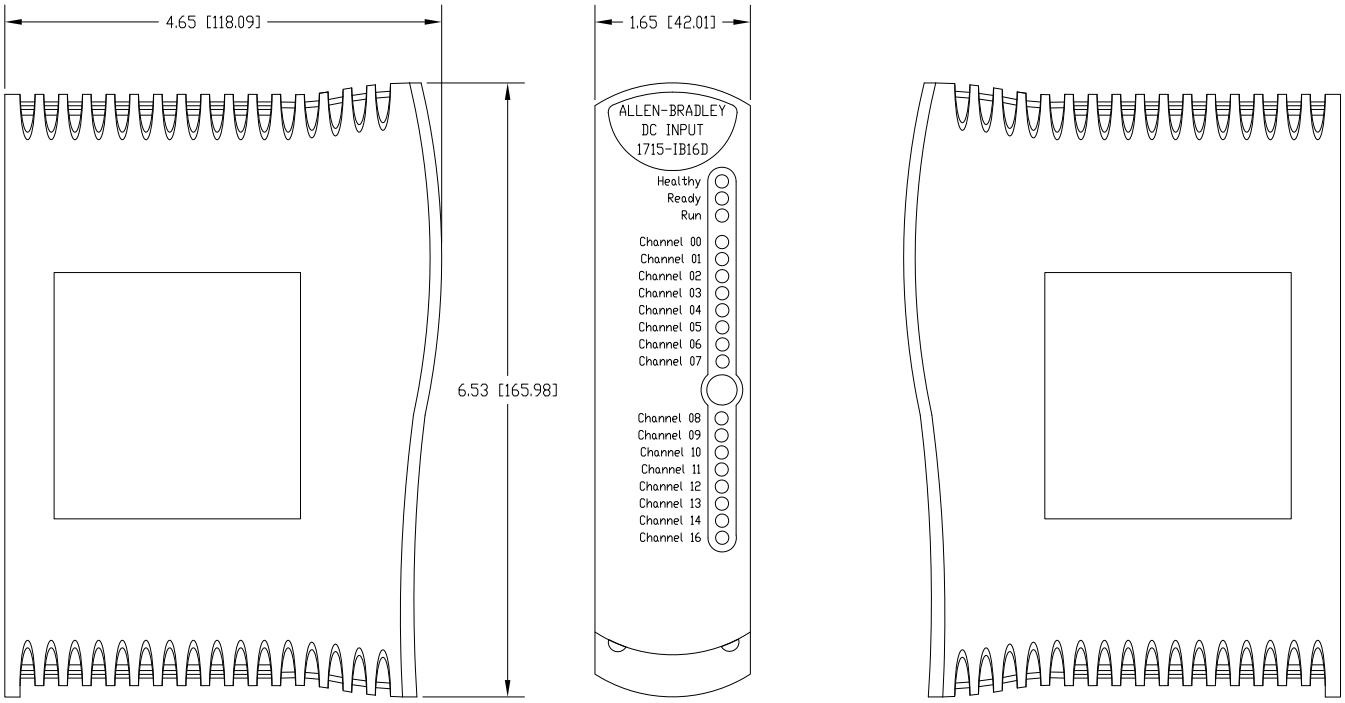

Published on 30 October 2026