ECLEM22LMMD

Stanilite Single Point Economy Circular Lighting E Luna LED EM Maintained with Motion Sensor

Stanilite®

Component type	Emergency luminaire
Range	Single Point Economy Circular Lighting
Model	N/A
Product status	Existing

The Stanilite single point economy circular lighting range features larger terminals for faster installation, efficient lithium power and an aesthetically pleasing design.

ELECTRICAL	Operating mode	Maintained
	Voltage type	AC
	Max. system power	32.5 W
	Nominal operation time	50000 h
	Driver type	LED
CONSTRUCTION	With remote switch connection	No
	With remote control	No
	Mounting method	Wall surface mounted / ceiling surface mounting
	With pictogram	No
	With light source	Yes
	Material housing	Steel
	Colour housing	White
	Material cover	Acrylic
	IP rating	IP20
PHOTOMETRIC	Lamp type	LED not exchangeable
	Photometric classification (C0)	D32
	Photometric classification	D32
	With movement sensor	Yes
DIMENSIONS	Width	325 mm
	Height/depth	85 mm
	Length	325 mm
	Outer diameter	325 mm
ENVIRONMENT	Rated ambient temperature according to IEC62722-2-1	0…40 °C
CERTIFICATES/APPROVALS	Compliant to AS/NZS CISPR 15	Yes
	Compliant to AS/NZS 2293.3:2018	Yes


Published on 17 April 2026

ECLEM22LMMD

Stanilite Single Point Economy Circular Lighting E Luna LED EM Maintained with Motion Sensor

CERTIFICATES/APPROVALS		
	Compliant to AS/NZS 60598.1:2017	Yes
	Compliant to AS/NZS 60598.2.22:2005	Yes

DIMENSIONAL DIAGRAM

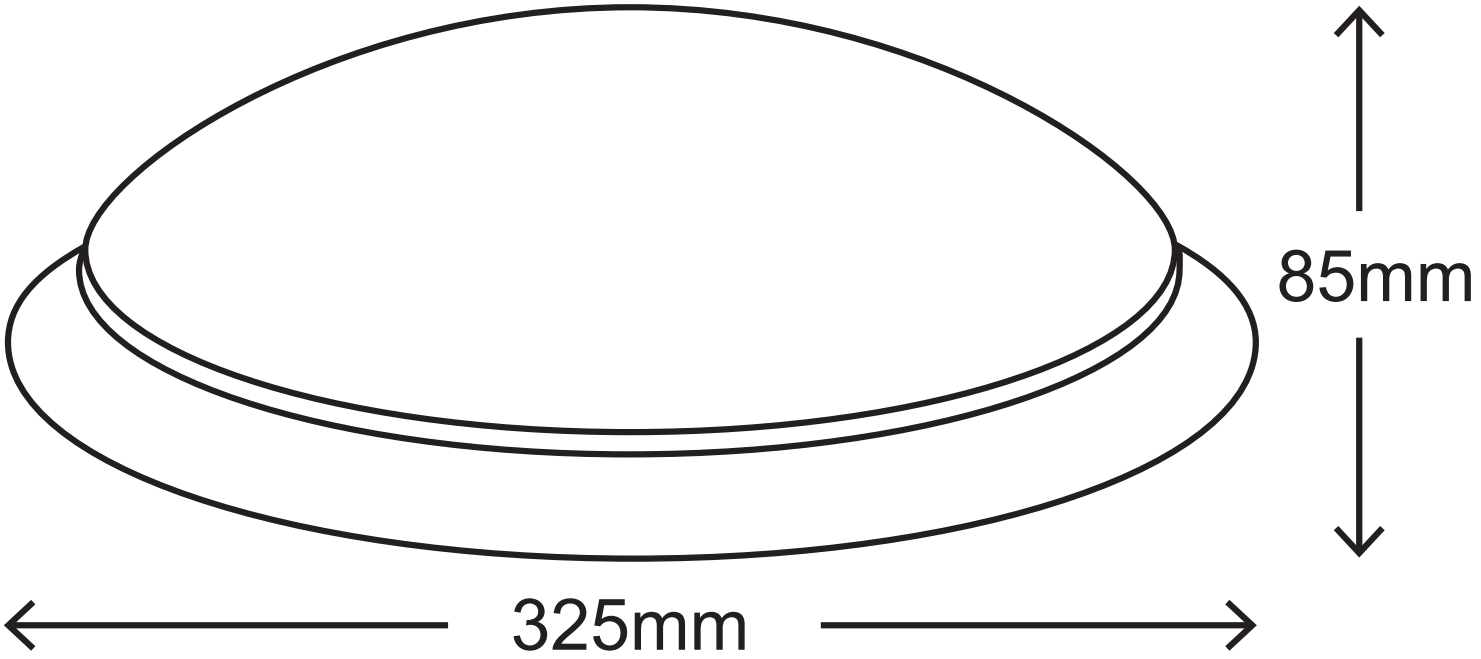

Published on 17 April 2026