
100SC85DD14BC

Allen-Bradley 100SC Safety Contactor 45kW 3Pole 110VDC Coil 1NO 4NC Contact Auxiliary

SAFETY CONTACTORS

NHP Allen-Bradley

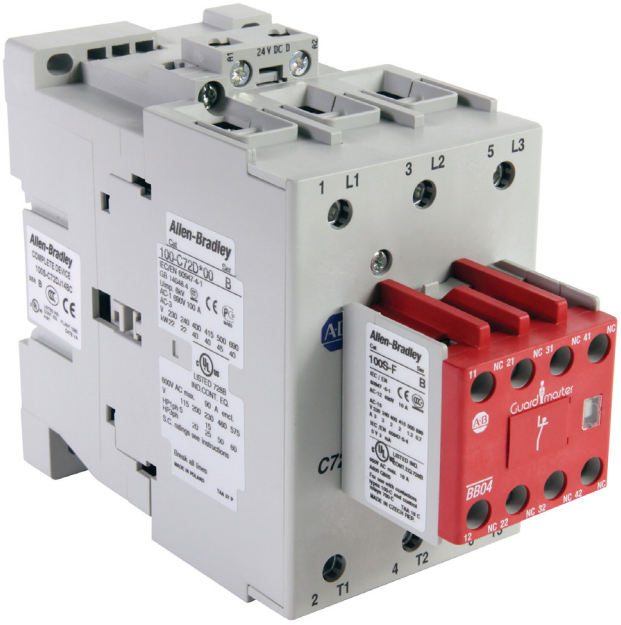

Component type	Power contactor, AC switching
Range	100SC
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 100S-C safety contactors provide mechanically linked positively guided or mirror contact performance, required in the feedback circuits of modern safety applications.

ELECTRICAL	Number of normally open contacts as main contact	3
	Number of normally closed contacts as main contact	0
	Rated operation current Ie at AC-3, 400 V	85 A
	Rated operation power at AC-3, 400 V	45 kW
	Rated operation current Ie at AC-1, 400 V	100 A
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	DC
	Control supply voltage Us at DC	110 V
	Number of auxiliary contacts as normally open contact	1
	Number of auxiliary contacts as normally closed contact	4
	Rated operation current Ie at AC-3, 690 V	49 A
	Rated operation power at AC-3, 690 V	45 kW
	Rated operation power at AC-4, 400 V	20 kW
	Power consumption, DC coil pickup	200 W
	Power consumption, DC coil hold-in	4 W
	Type of electrical connection of main circuit	Screw connection
	Rated operation current Ie at AC-4, 400 V	38 A
CONSTRUCTION	IP rating	IP20
	Mounting method	Screw mounting
DIMENSIONS	Height	122 mm
	Width	81 mm
	Depth	164.5 mm
	Weight	1.55 kg


Published on 29 October 2026

100SC85DD14BC

Allen-Bradley 100SC Safety Contactor 45kW 3Pole 110VDC Coil 1NO 4NC Contact Auxiliary

SAFETY CONTACTORS

DIMENSIONAL DIAGRAM

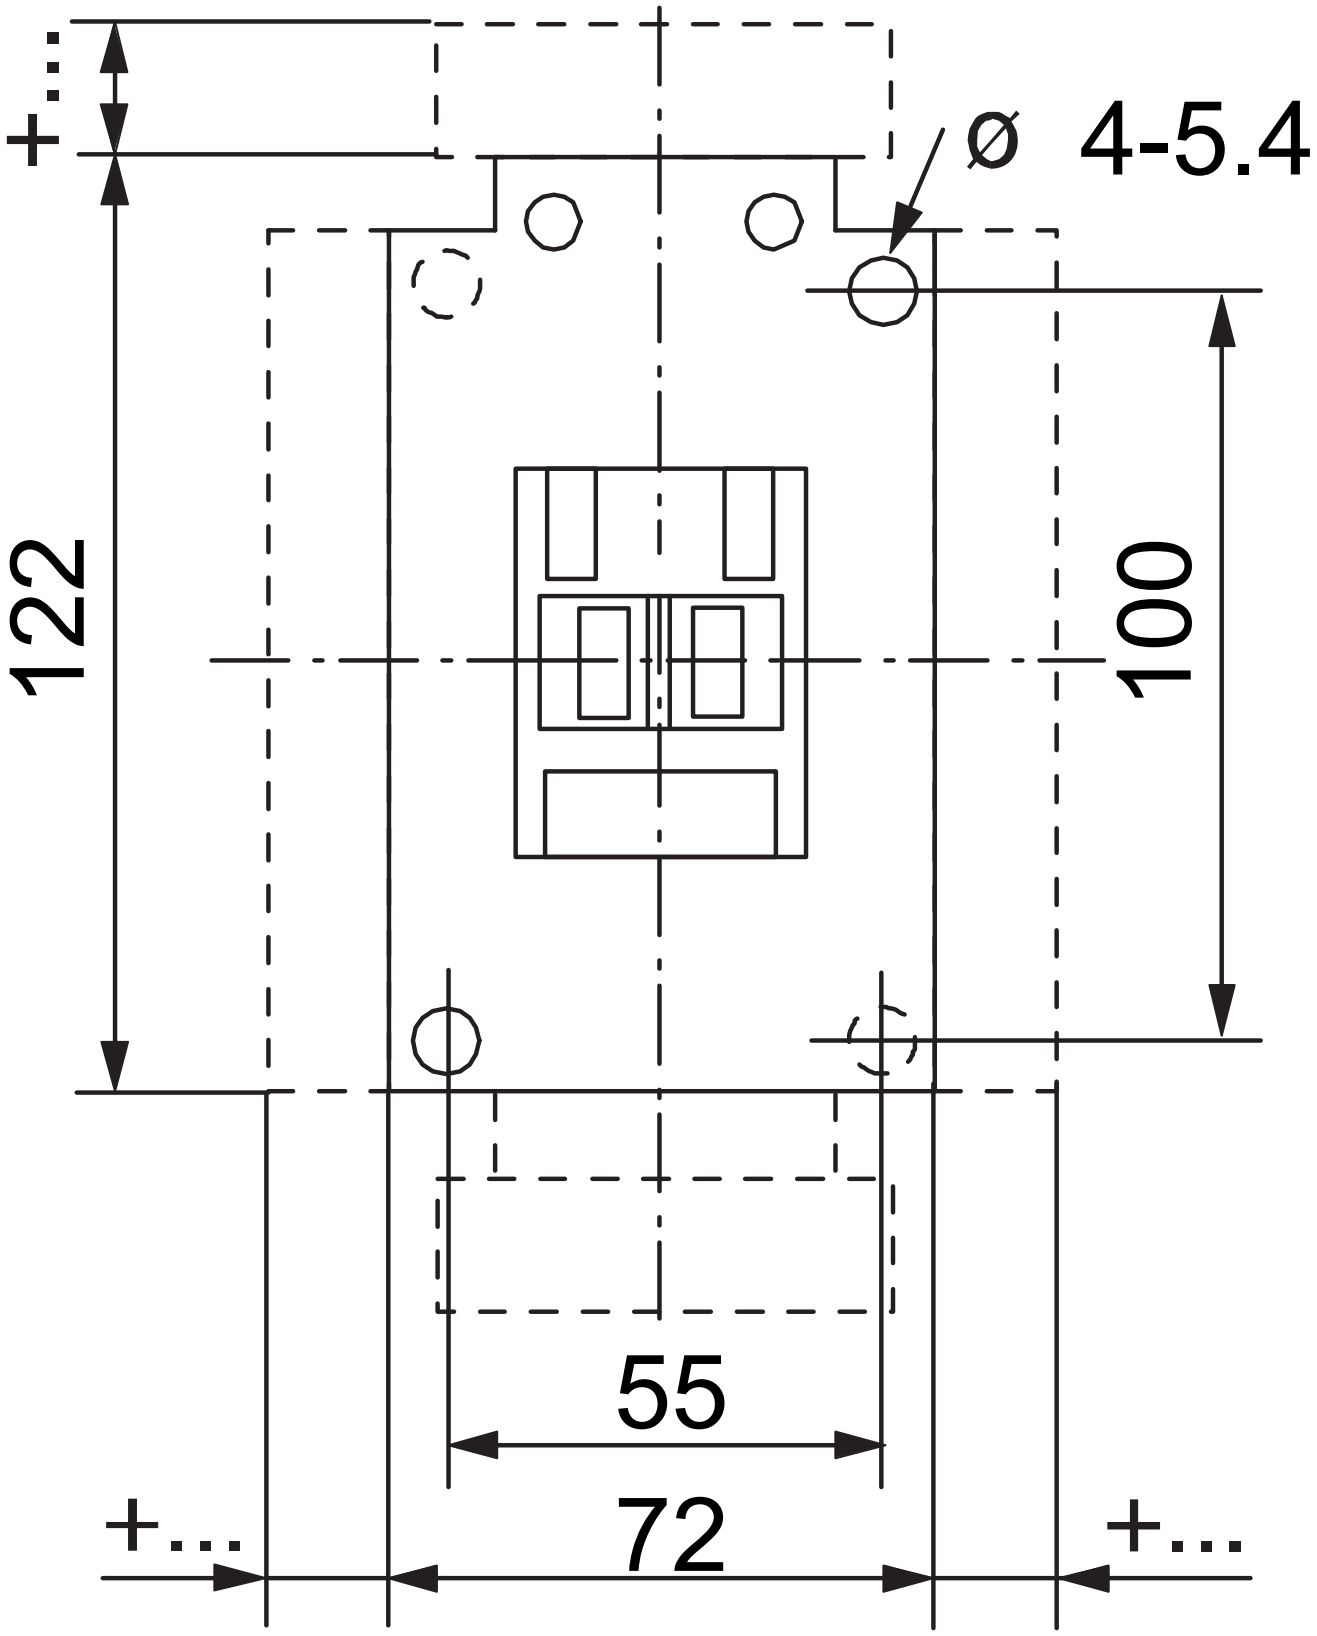

Published on 29 October 2026