
100SE370KD12C

Allen-Bradley 100SE Safety Contactor 200kW 3P 100-250V AC/ DC Coil 1NO 1NC Auxiliary

CONTACTORS

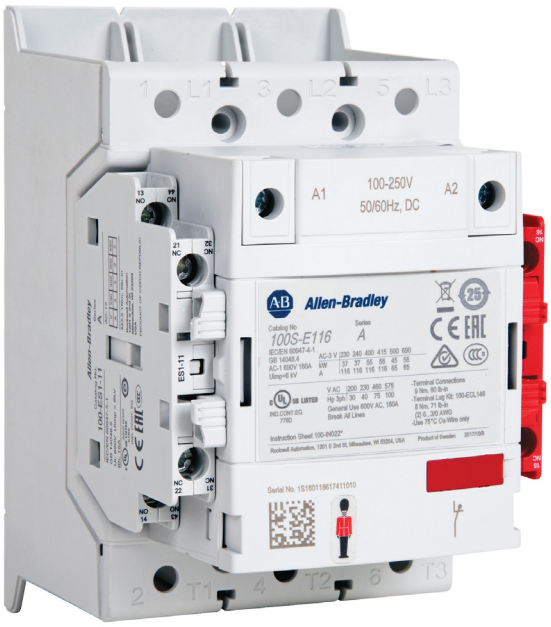

Component type	Power contactor, AC switching
Range	100SE
Model	N/A
Product status	Existing

The Allen-Bradley Bulletin 100S-E safety contactors provide mechanically linked positively guided or mirror contact performance, required in the feedback circuits of modern safety applications.

ELECTRICAL	**Rated operation power at AC-3, 400 V**	200 kW
	Max. rated operation voltage Ue AC	690 V
	Voltage type for actuating	AC/DC
	Rated control supply voltage Us at AC 50HZ	100-250 V
	Rated control supply voltage Us at DC	100-250 V
	Rated operation current Ie at AC-3, 690 V	21 A
	Rated operation power at AC-3, 690 V	18.5 kW
	Rated control supply voltage Us at AC 60HZ	100-250 V
	Power consumption, AC coil pickup	50 VA
	Power consumption, AC coil hold-in	2.2 VA
	Power consumption, DC coil pickup	50 W
	Power consumption, DC coil hold-in	2 W
	Type of electrical connection of main circuit	Screw connection
CONSTRUCTION	**IP rating**	IP20
	Mounting method	DIN-rail/screw
DIMENSIONS	**Height**	86 mm
	Width	45 mm
	Depth	119.5 mm
	Weight	4.64 kg


Published on 13 October 2026

100SE370KD12C

Allen-Bradley 100SE Safety Contactor 200kW 3P 100-250V AC/ DC Coil 1NO 1NC Auxiliary

CONTACTORS

DIMENSIONAL DIAGRAM

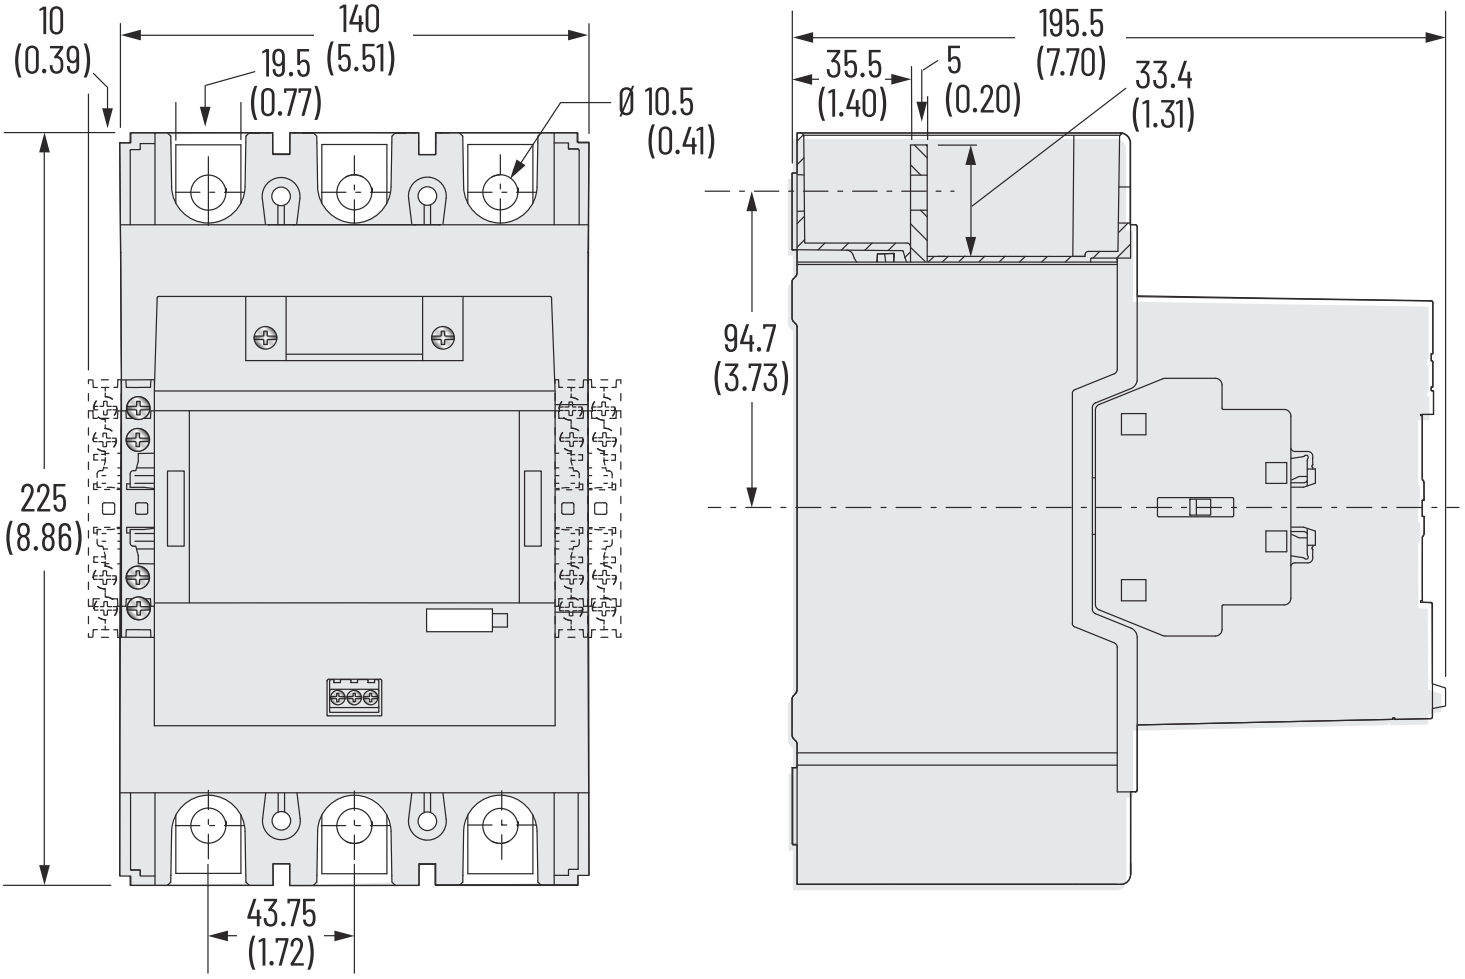

Dimensions are shown in millimeters (inches).

Published on 13 October 2026