150F361NBDD

Allen-Bradley SMC Flex Soft Starter 480V 361A ND3W 100 ro 240VAC Control Braking Control

SOFT STARTERS



Component type	Soft starter
Range	SMC Flex
Model	N/A
Product status	Existing

The Allen-Bradley SMC Flex Soft Starters feature integral bypass and flexible communications providing advanced performance, diagnostics, and protection. Available with a current range from 5A to 1250A, modular in design for installation and commissioning, with built-in LCD displays and communication modules ensuring connection to multiple networks.

ELECTRICAL	Rated power three-phase motor, inline, at 400 V	200 kW
	Rated power three-phase motor, inside delta, at 400 V	355 kW
	Rated operating voltage Ue	200-480 V
	Integrated motor overload protection	Yes
	Release class	Adjustable
	Internal bypass	Yes
	Voltage type for actuating	AC
	Rated control supply voltage Us at AC 50HZ	100-240 V
	Rated control supply voltage Us at AC 60HZ	100-240 V
	Function	Single direction
CONSTRUCTION	With display	Yes
	IP rating	IP00
DIMENSIONS	Height	600 mm
	Width	290 mm
	Depth	276.5 mm
	Weight	45.8 kg
ENVIRONMENT	Rated surrounding temperature without derating	40 °C


Published on 07 September 2026

150F361NBDD

Allen-Bradley SMC Flex Soft Starter 480V 361A ND3W 100 ro 240VAC Control Braking Control

SOFT STARTERS

DIMENSIONAL DIAGRAM

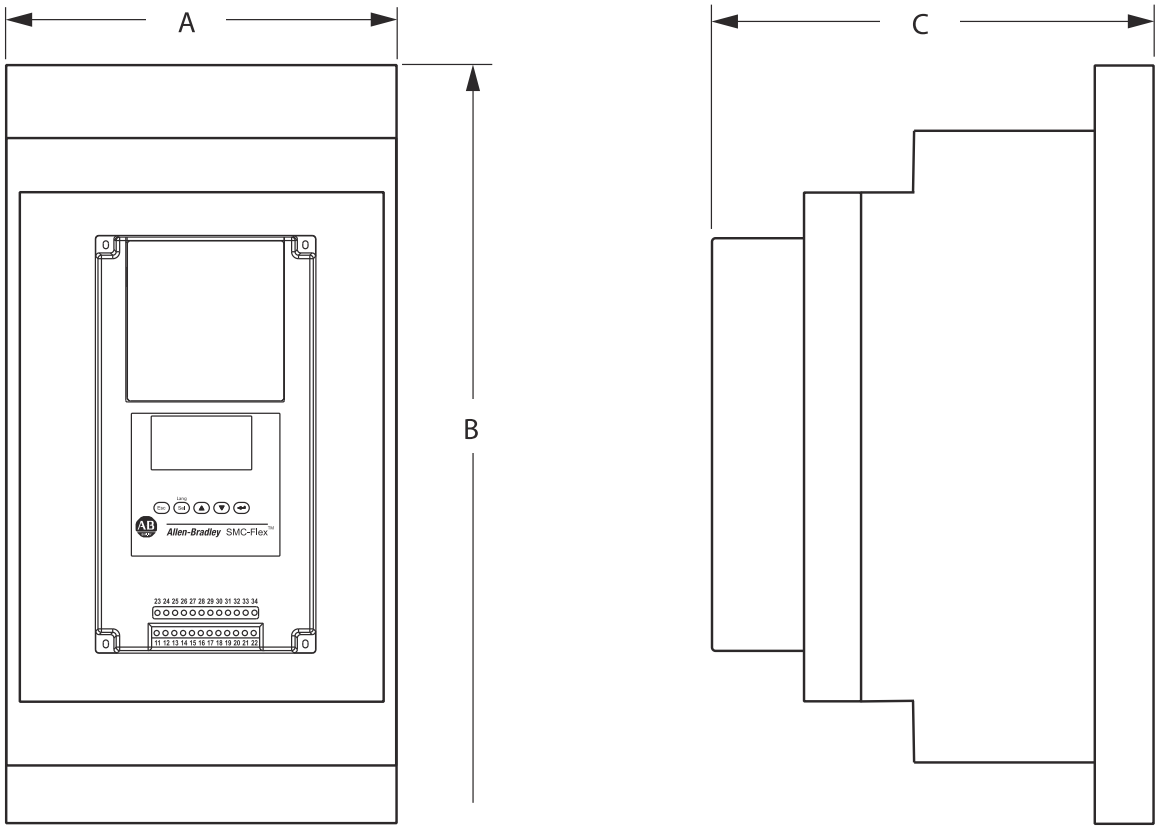

Dimensions are in millimeters (inches).

Rated Current [A]	B Height	A Width	C Depth	Weight
5...85	321.0 (12.60)	150.0 (5.90)	203.0 (8.00)	5.7 kg (12.5 lb)
108...135	443.7 (17.47)	196.4 (7.74)	212.2 (8.35)	15.0 kg (33.0 lb)
201...251	560.0 (22.05)	225.0 (8.86)	253.8 (9.99)	30.4 kg (67.0 lb)
317...480	600.0 (23.62)	290.0 (11.42)	276.5 (10.89)	45.8 kg (101 lb)
625...780	1041.1 (41.00)	596.9 (23.50)	346.2 (13.63)	179 kg (395 lb)
970...1250	1041.1 (41.00)	596.9 (23.50)	346.2 (13.63)	224 kg (495 lb)

Published on 07 September 2026