


194RNU2001753

Allen-Bradley 194R Disconnect Switch UL Non Fused Base mount 3 Pole 200A



Allen-Bradley

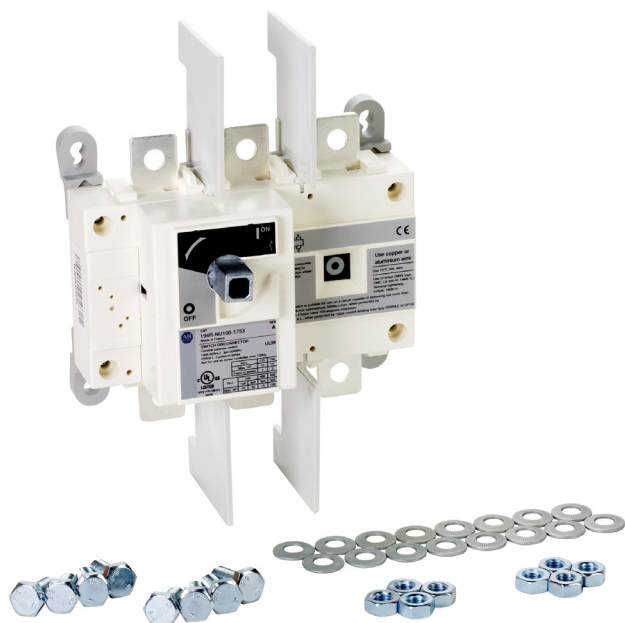

Component type	Switch disconnector
Range	194R Disconnect
Model	N/A
Product status	Existing

The Bulletin 194R range of disconnect switches are rugged, durable and tested to severe utilisation categories AC-22 and AC-23 for use in demanding applications such as food and beverage and material handling. All in a compact footprint to reduce your panel space requirements.

ELECTRICAL

Rated uninterrupted current Iu	200 A
Number of poles	3
Type of control element	Long turning handle
Type of electrical connection of main circuit	Screw connection
Number of auxiliary contacts as normally closed contact	0
Number of auxiliary contacts as normally open contact	0
Motor drive integrated	No
Voltage release optional	No

CONSTRUCTION

Device construction	Complete device in housing
Degree of protection (IP), front side	IP20
Version as main switch	Yes
Version as maintenance-/service switch	No
Version as safety switch	No
Version as emergency stop installation	No
Version as reversing switch	No
Number of switches	1
Suitable for front mounting 4-hole	No
Suitable for distribution board installation	Yes
Interlockable	No

DIMENSIONS

Height	256 mm
Width	180 mm
Depth	94.6 mm
Weight	1.67 kg
Connectable conductor cross section	300 mm ²

194RNU2001753

Allen-Bradley 194R Disconnect Switch UL Non Fused Base
mount 3 Pole 200A



ENVIRONMENT

Rated surrounding temperature without derating	60 °C
Storage temperature	-40...65 °C
Allowable relative humidity	95 %