


20AC037A0AYNANC0

Allen-Bradley PowerFlex 70 VSD 400V IP20 37A 18.5kW ND or 30A 15kW HD



LARGE DRIVES

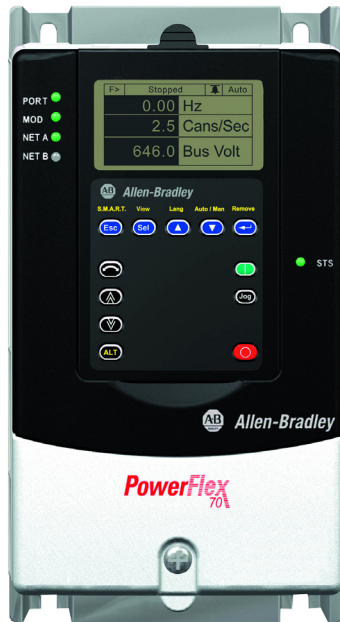

Component type	Frequency converter =< 1 kV
Range	PowerFlex 70
Model	N/A
Product status	Phased Out

The Allen-Bradley PowerFlex® 70 AC Drives are a compact packaged motor control solution with operator interface designed for space saving, simplicity and reliability. Featuring integration into an architecture and configured to provide a solution for various application needs.

ELECTRICAL

Number of phases input	3
Nominal input voltage	415 V
Nominal output power AC	18.5 kW
Nominal output current I2N	37 A
kW rating, normal duty	18.5 kW
kW rating, heavy duty	15 kW
Number of phases output	3
Mains frequency	50 Hz
Dynamic braking transistor	Yes
Control characteristic	PID
EMC-version	Yes
Mains voltage	400 V

COMMUNICATION

Number of HW-interfaces RS-485	2
Supporting protocol for EtherNet/IP	Yes
Supporting protocol for Modbus	Yes
Supporting protocol for DeviceNet	Yes
Supporting protocol for TCP/IP	Yes
Supporting protocol for PROFIBUS	Yes
Supporting protocol for CAN	Yes
Number of HW-interfaces RS-232	2
Number of HW-interfaces USB	2

CONSTRUCTION

Suitable for safety functions	Yes
Contains keypad	No
Number of digital inputs	6
Number of digital outputs	2
Number of analogue inputs	2

20AC037A0AYNANC0

Allen-Bradley PowerFlex 70 VSD 400V IP20 37A 18.5kW ND or
30A 15kW HD



LARGE DRIVES



Allen-Bradley

CONSTRUCTION

Number of analogue outputs	1
Frame size	D
Degree of protection (IP)	IP20
Relative symmetric net voltage tolerance	10 %
With control element	Yes
Application in industrial area permitted	Yes
Application in domestic- and commercial area permitted	Yes
Integrated breaking resistance	No
Degree of protection (NEMA)	1

DIMENSIONS

Height	350 mm
Width	219.9 mm
Depth	210.7 mm
Weight	9.13 kg